



The Status of JUNO

Haoqi Lu

Institute of High Energy physics

(On Behalf of the JUNO Collaboration)


Tau2016, Sep19-23, Beijing

Outline

- Introduction
- JUNO experiment
- Status of JUNO
- Summary&&Plan

Neutrino Mixing

In a 3-ν framework

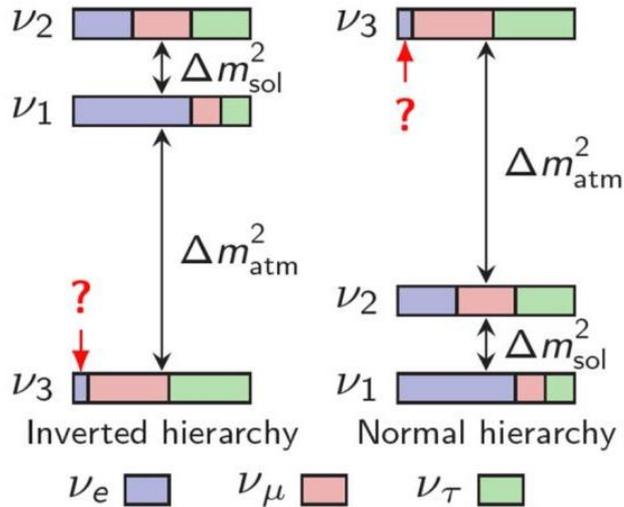

$$\begin{pmatrix} \nu_e \\ \nu_\mu \\ \nu_\tau \end{pmatrix} = \begin{pmatrix} U_{e1} & U_{e2} & U_{e3} \\ U_{\mu1} & U_{\mu2} & U_{\mu3} \\ U_{\tau1} & U_{\tau2} & U_{\tau3} \end{pmatrix} \begin{pmatrix} \nu_1 \\ \nu_2 \\ \nu_3 \end{pmatrix}$$

$$U = \begin{pmatrix} 1 & 0 & 0 \\ 0 & \cos \theta_{23} & \sin \theta_{23} \\ 0 & -\sin \theta_{23} & \cos \theta_{23} \end{pmatrix} \begin{pmatrix} \cos \theta_{13} & 0 & \sin \theta_{13} e^{-i\delta} \\ 0 & 1 & 0 \\ -\sin \theta_{13} e^{i\delta} & 0 & \cos \theta_{13} \end{pmatrix} \begin{pmatrix} \cos \theta_{12} & \sin \theta_{12} & 0 \\ -\sin \theta_{12} & \cos \theta_{12} & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

We've determined the value of θ_{12} , θ_{23} and θ_{13} by different type of neutrino experiments.

$$\Delta m_{sol}^2 : \Delta m_{21}^2 \quad \Delta m_{atm}^2 : \Delta m_{31}^2, \Delta m_{32}^2$$

$$\text{NH} : |\Delta m_{31}^2| = |\Delta m_{32}^2| + |\Delta m_{21}^2|, \quad |\Delta m_{31}^2| > |\Delta m_{32}^2| \quad \Delta m_{32}^2 > 0$$

$$\text{IH} : |\Delta m_{31}^2| = |\Delta m_{32}^2| - |\Delta m_{21}^2|, \quad |\Delta m_{31}^2| < |\Delta m_{32}^2| \quad \Delta m_{32}^2 < 0$$

Next generation experiments mainly focus on the determination of the mass hierarchy (MH) and the measurement of the CP Phase.

Measuring Mass Hierarchy with Reactor neutrinos

- Place detector at medium baseline (~50km) from reactors
- Observe the distortion of energy spectrum
- Oscillation probability independent of CP phase and θ_{23}

Antineutrino survival probability:


$$P_{ee}(L/E) = 1 - P_{21} - P_{31} - P_{32}$$

$$P_{21} = \cos^4(\theta_{13}) \sin^2(2\theta_{12}) \sin^2(\Delta_{21})$$


$$P_{31} = \cos^2(\theta_{12}) \sin^2(2\theta_{13}) \sin^2(\Delta_{31})$$

$$P_{32} = \sin^2(\theta_{12}) \sin^2(2\theta_{13}) \sin^2(\Delta_{32})$$

where $\Delta_{ij} = 1.27\Delta m_{ij}^2 L/E$, Δm_{ij}^2 is the neutrino mass-squared difference ($m_i^2 - m_j^2$) in eV^2 .

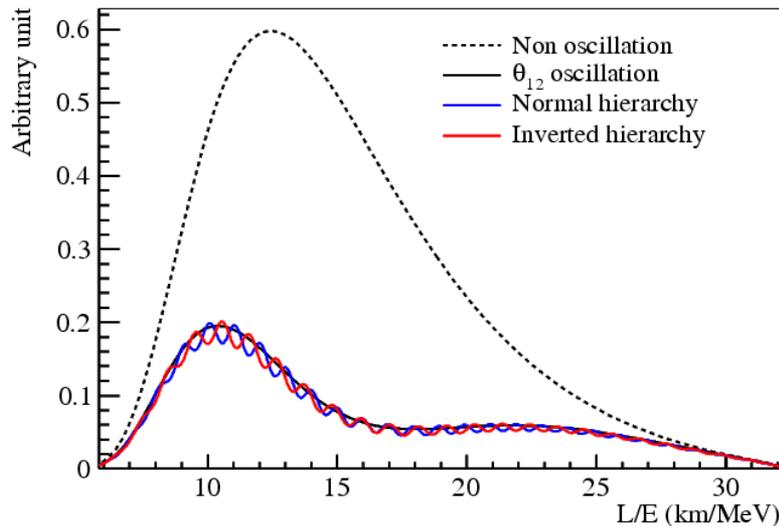


Fourier transform to show the interference

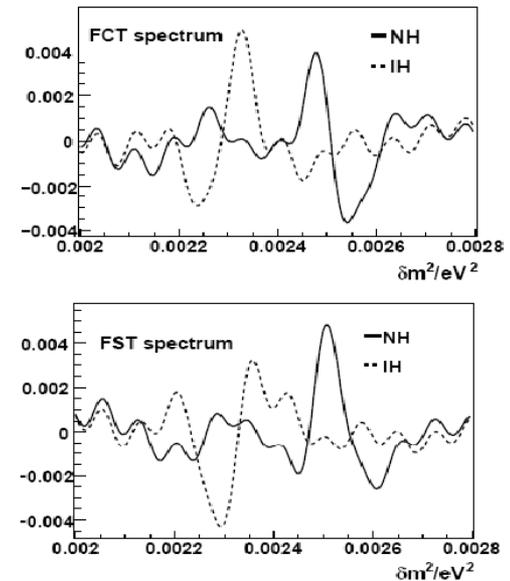

S.T. Petcov et al., PLB533(2002)94
 S.Choubey et al., PRD68(2003)113006
 J. Learned et al., Phys.Rev. D78 (2008) 071302
 Zhan, Y. Wang, J. Cao, L. Wen, PRD78:111103, 2008
 PRD79:073007, 2009

The Jiangmen Underground Neutrino Observatory(JUNO)

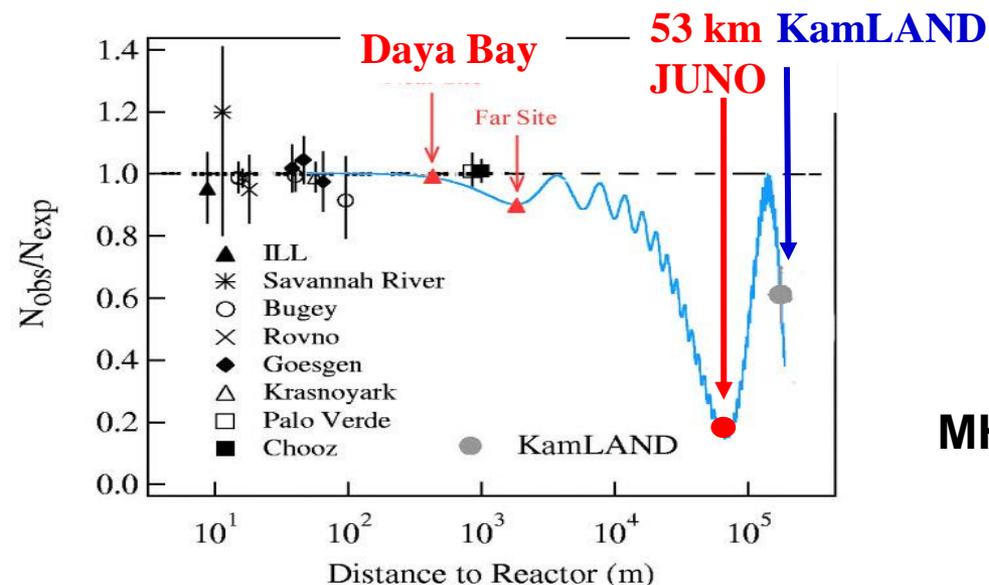


Nominal experiment setup

- 700 m deep underground
- 36 GW reactor power
- 53km baseline;
- 20 kton LS detector
- 3% energy resolution@1MeV
- Running time: 6 years


MH sensitivity study

$$\Delta\chi_{\text{MH}}^2 = |\chi_{\text{min}}^2(\text{N}) - \chi_{\text{min}}^2(\text{I})|$$

Optimization baseline at the oscillation maximum of θ_{12}

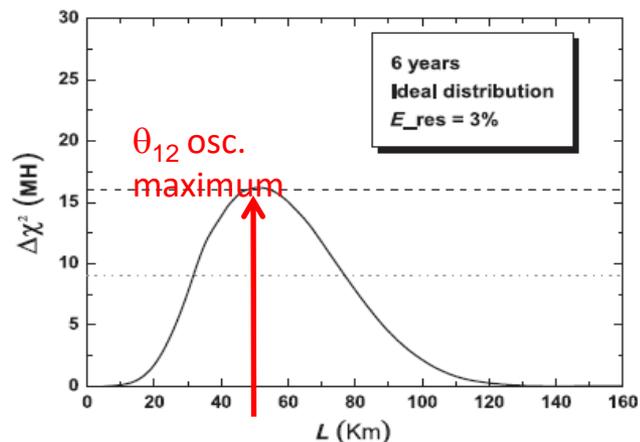


Multiple reactors cores may reduce the MH sensitivity (Baseline difference can not be more than 0.5km)

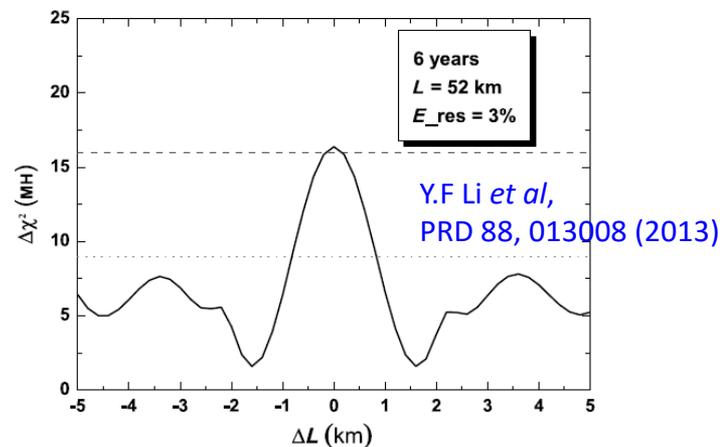



Location of JUNO

NPP	Daya Bay	Huizhou	Lufeng	Yangjiang	Taishan
Status	Operational	Planned	Planned	Under construction	Under construction
Power	17.4 GW	17.4 GW	17.4 GW	17.4 GW	18.4 GW

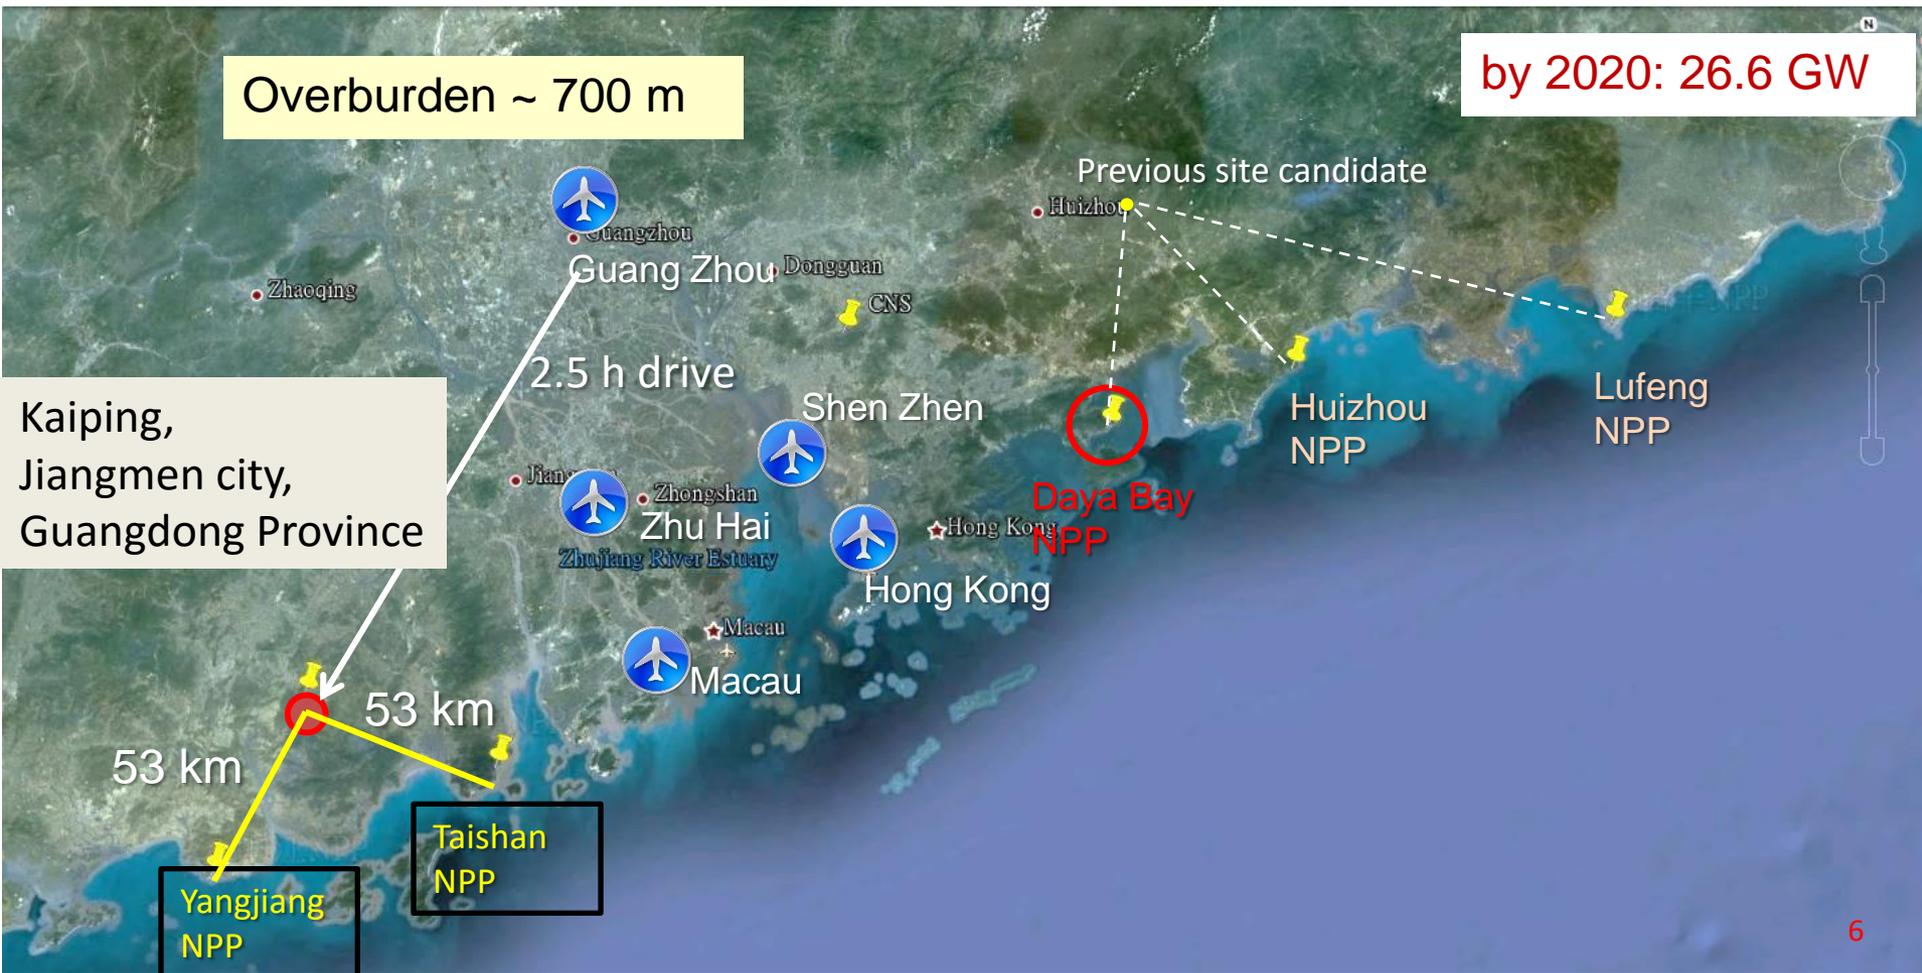

Mass hierarchy sensitivity

Improved by $\Delta m^2_{\mu\mu}$ precision of 1%

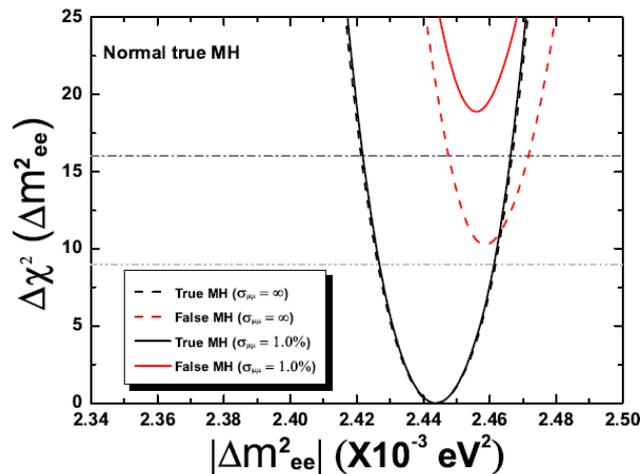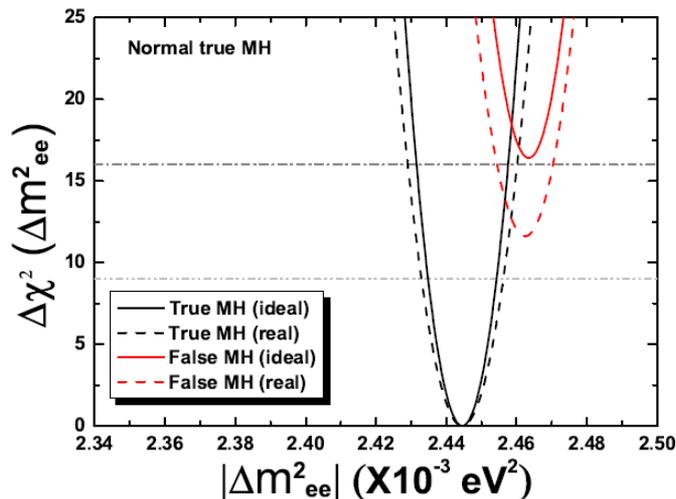



$\sqrt{\Delta\chi^2}$	Without $\Delta m^2_{\mu\mu}$ input	With $\Delta m^2_{\mu\mu}$ input (1%)
Equal baseline(ideal)	4	5
Core distribution(real)	3	4

$$\Delta m^2_{ee} \simeq \cos^2 \theta_{12} \Delta m^2_{31} + \sin^2 \theta_{12} \Delta m^2_{32},$$

$$\Delta m^2_{\mu\mu} \simeq \sin^2 \theta_{12} \Delta m^2_{31} + \cos^2 \theta_{12} \Delta m^2_{32} + \sin 2\theta_{12} \sin \theta_{13} \tan \theta_{23} \cos \delta \Delta m^2_{21}$$

Y.F Li *et al*,
PRD 88, 013008 (2013)



Mass hierarchy sensitivity vs energy resolution

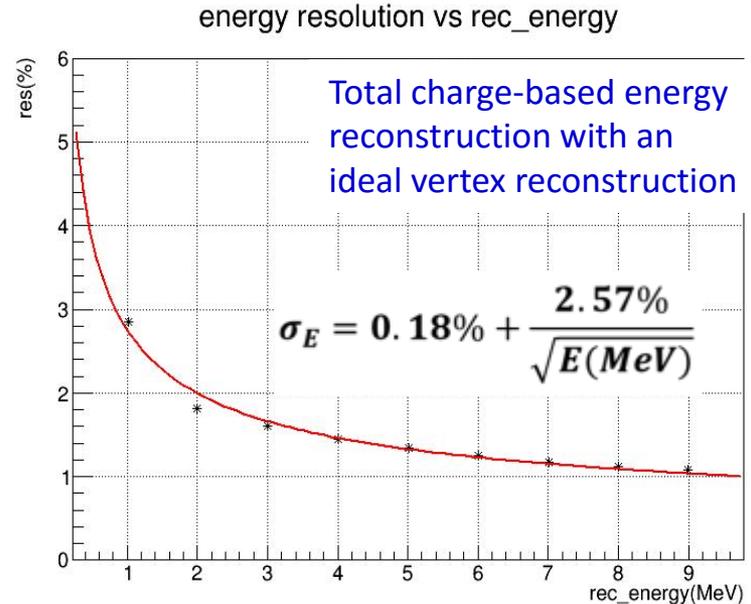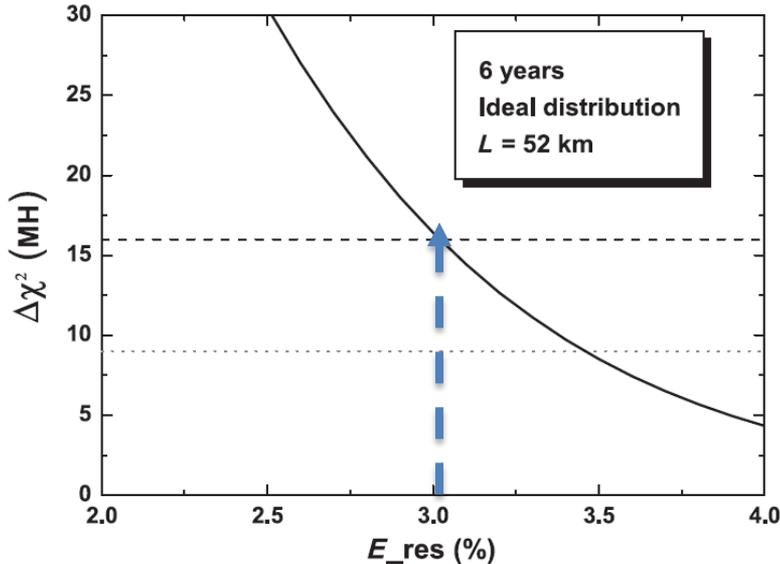


- Energy resolution:
 - 3%@1MeV energy resolution for 4 sigma sensitivity at ideal distribution.
- Experiment requirements to achieve such an unprecedentedly high energy resolution
 - PMT coverage: 75%
 - High QE PMT: 35%
 - Liquid scintillator attenuation length > 20 m @ 430nm

Event detection

- Signal: Inverse beta decay reaction (IBD)

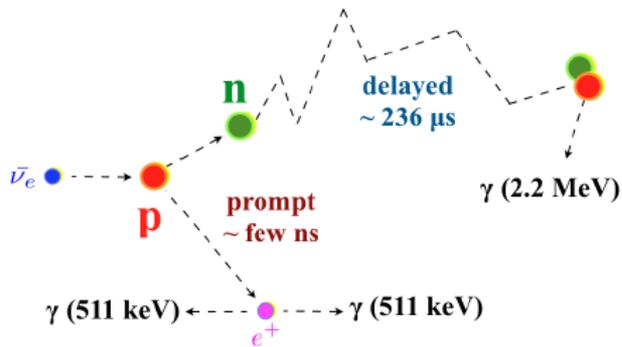

Antineutrino spectrum

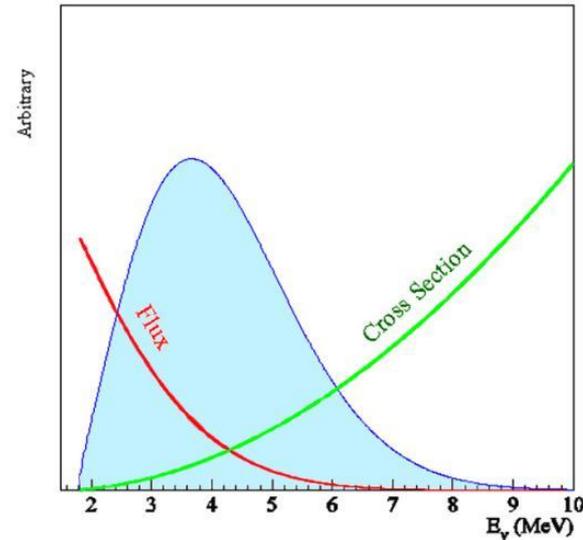


Anticipated signal/background

Selection	IBD efficiency	IBD	Geo- ν s	Accidental	${}^9\text{Li}/{}^8\text{He}$	Fast n	(α, n)
-	-	83	1.5	$\sim 5.7 \times 10^4$	84	-	-
Fiducial volume	91.8%	76	1.4	410	77	0.1	0.05
Energy cut	97.8%	73	1.3		71		
Time cut	99.1%			1.1			
Vertex cut	98.7%	60	1.1	0.9	1.6		
Muon veto	83%	60	1.1	0.9	1.6		
Combined	73%	60	3.8				


Rich physics possibilities of JUNO

- Precision of three parameters (Δm^2_{21} , Δm^2_{ee} and $\sin^2\theta_{12}$) will reach sub-percent level, several times improvement compared with current precision.
- Probing the unitarity of U_{PMNS} to $\sim 1\%$ level.

Event Rate (after selection)

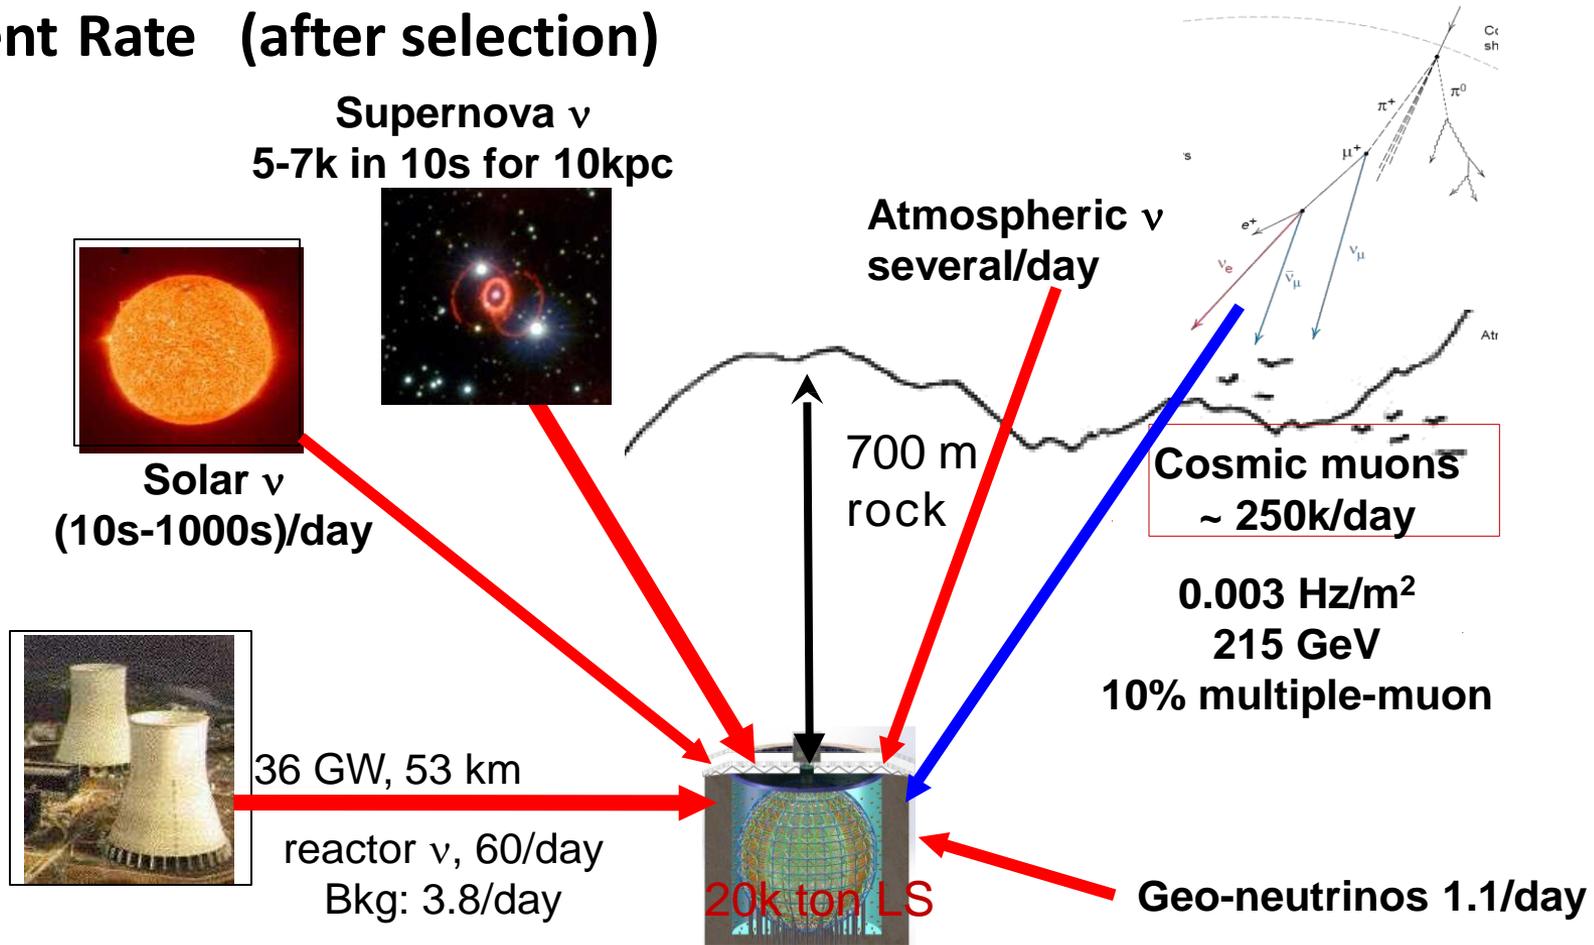

Detector structure and layout

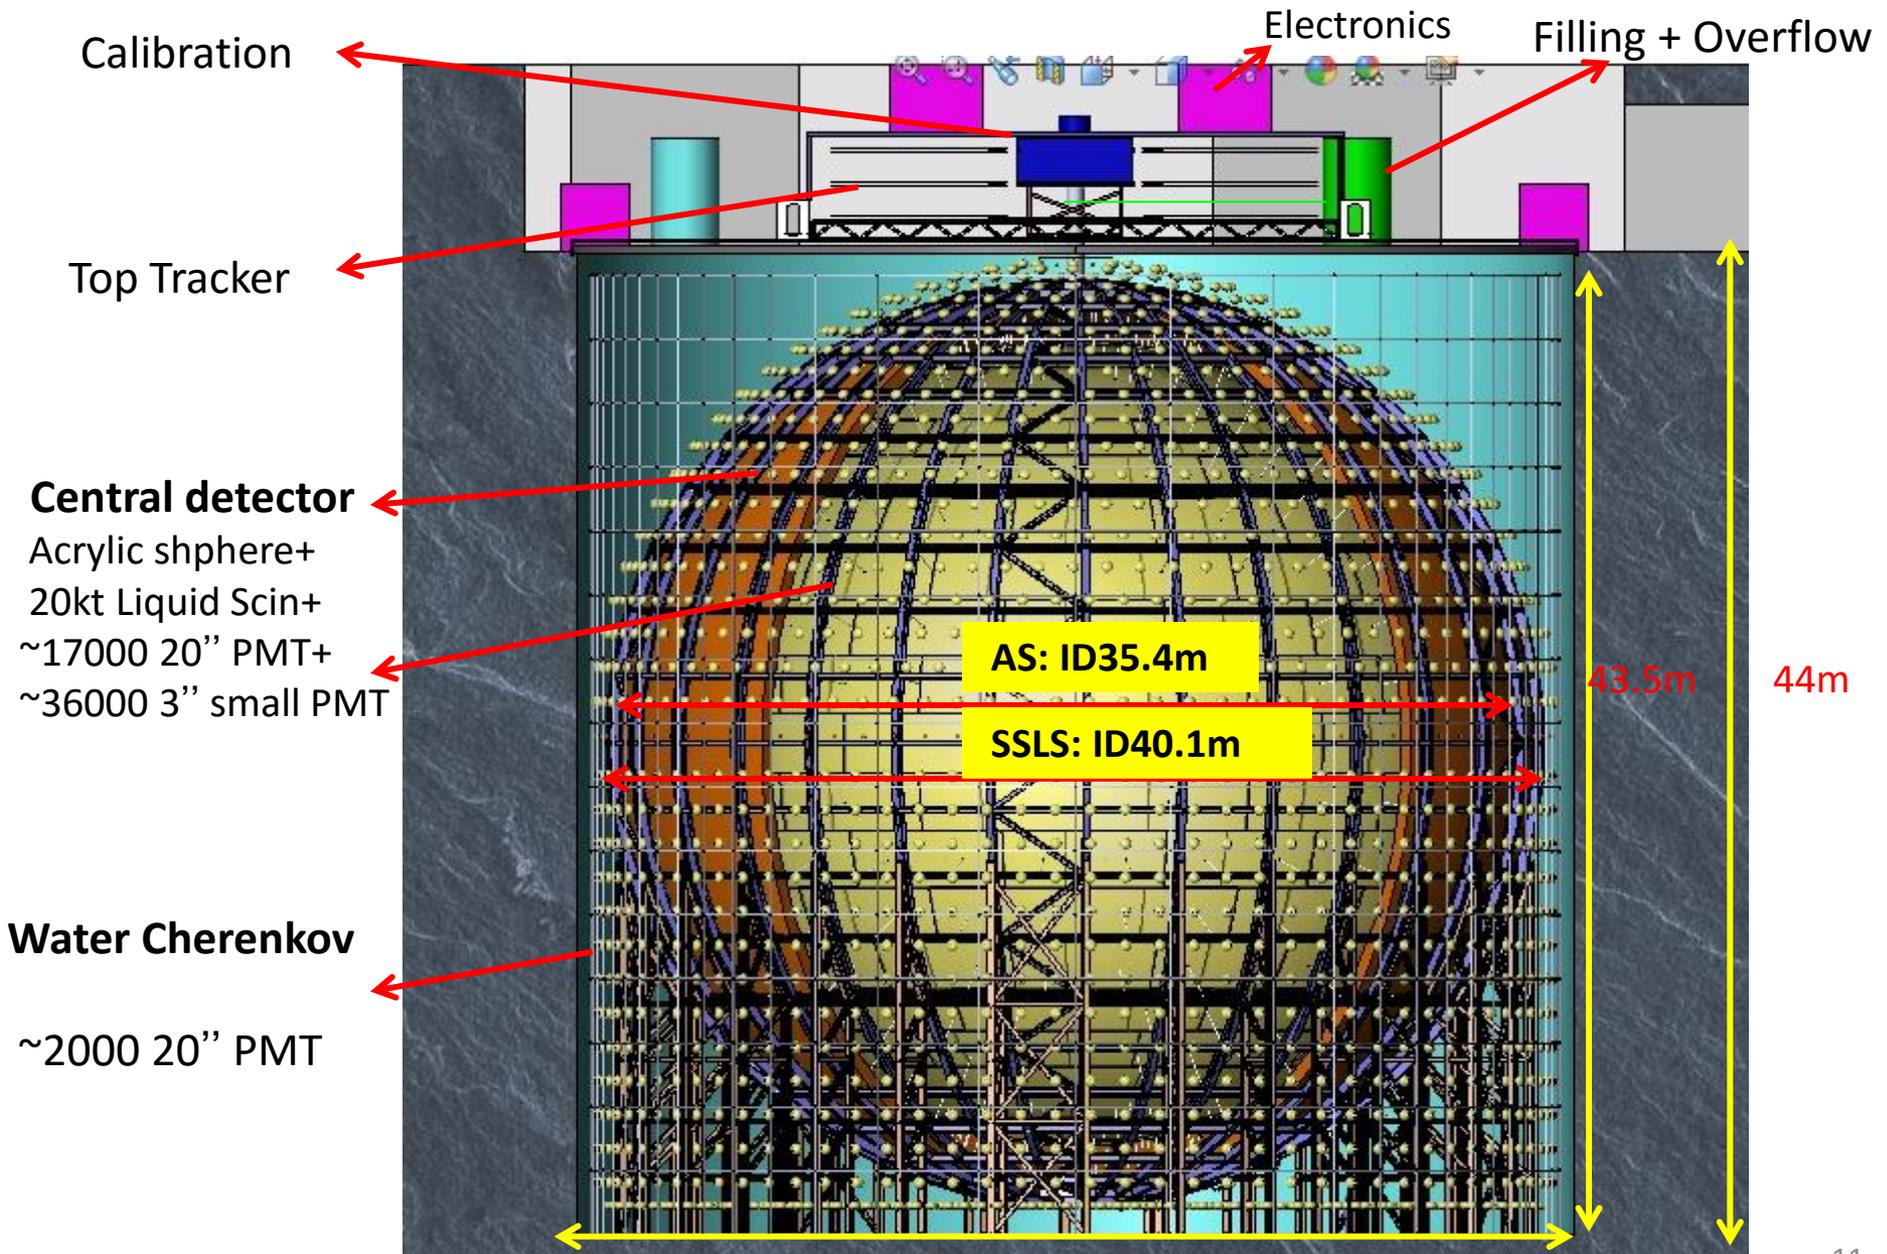


AS: Acrylic sphere; SSLS: stainless steel latticed shell


D43.5m

Central detector(CD)


Acrylic sphere+ SS truss




Balloon+ SS tank




Acrylic module+ SS tank



Acrylic sphere+ SS tank




March, 2014

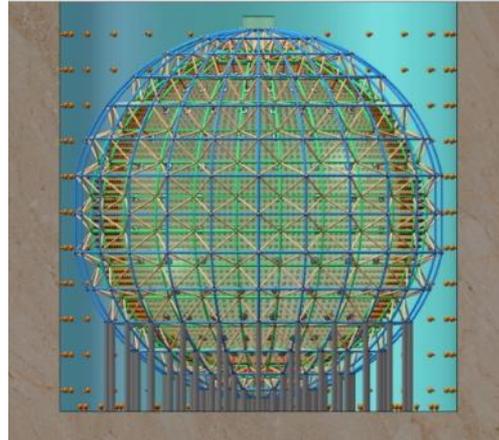

SS truss+ Acrylic sphere

July, 2015

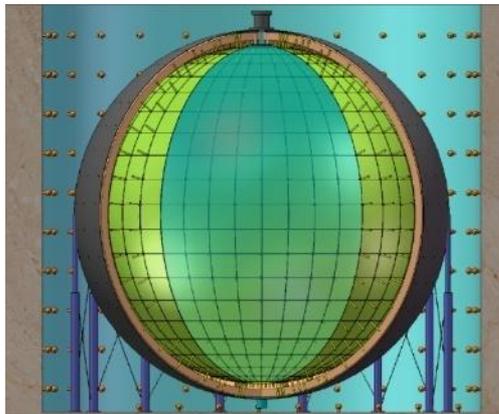

Balloon + Acrylic support+ SS tank





Final decision:
Acrylic sphere + SS truss



Key features

- ✓ Thickness of Acrylic: 120mm
- ✓ Acrylic panels(21/23 layers + top chimney+ bottom flange): ~260 pieces
- ✓ Connecting nodes: ~590
- ✓ Total Weight: 600 tons of acrylic and 600 tons of steel

Acrylic sphere R&D

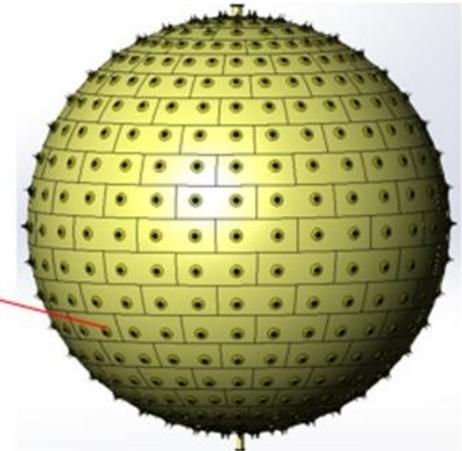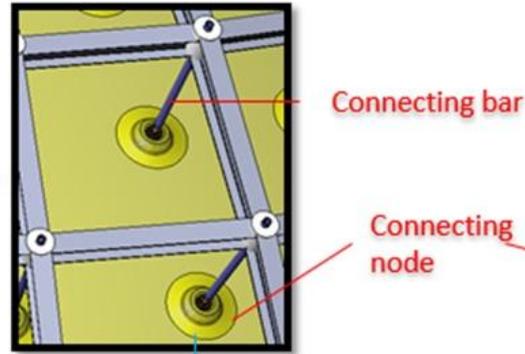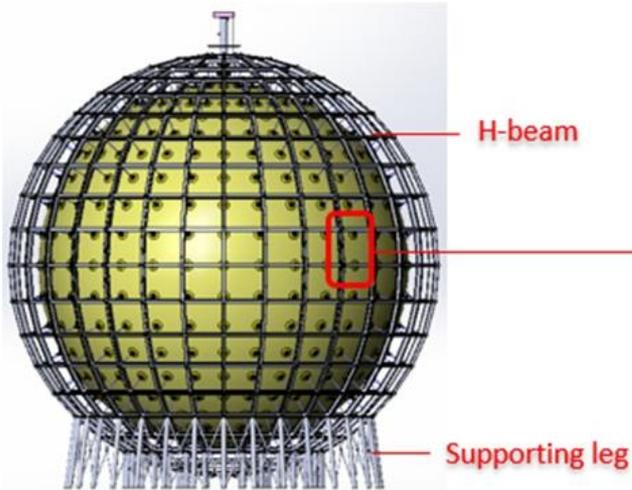


Forming panel size: 3m x 8m x 120mm

Prototype of spherical panel



Acrylic connection nodes


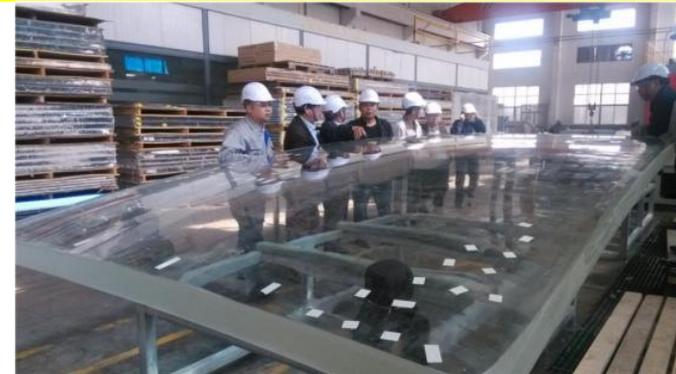


The problems of shrinkage and shape variation were resolved.

Liquid scintillator(LS)

Requirement for LS:

- Long Attenuation Length: $>20\text{m}@430\text{nm}$
- Low background: ^{238}U , ^{232}Th , $^{40}\text{K} < 10^{-15}\text{g/g}$;
- Preliminary recipe(based on Daya Bay)

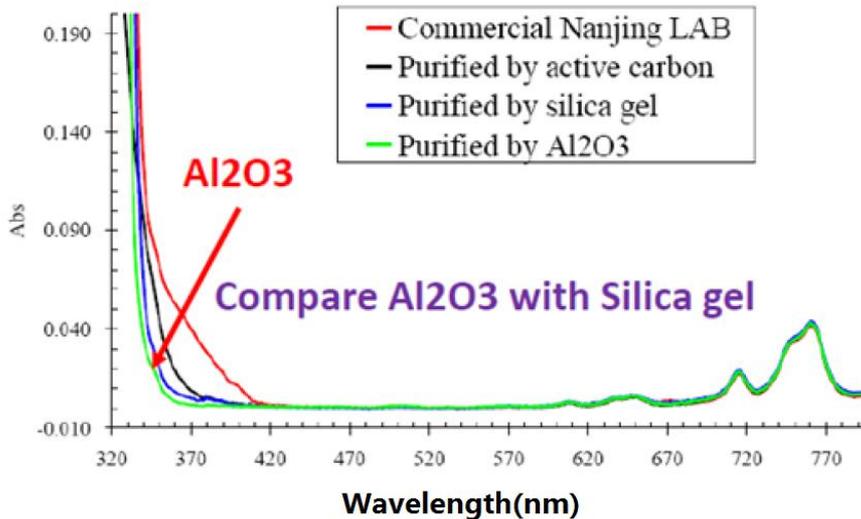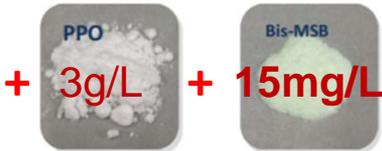

LS Production:

In order to get good quality LS



- Use Al₂O₃ column for LS purification to increase the attenuation length;
- Use distillation, water extraction and steam stripping to reduce the radiation background for background control.

LS purification pilot plant has been built in Daya Bay LS hall as a pre-study for JUNO LS mass production.



PMT coverage

- ~17000 20" PMT -> 75% photocathode coverage;
- Goal is to detect the largest light level ever detected in LS detector ~1200 pe/MeV
- Daya Bay 160 pe/MeV-KamLAND 250 pe/MeV-Borexino 500 pe/MeV

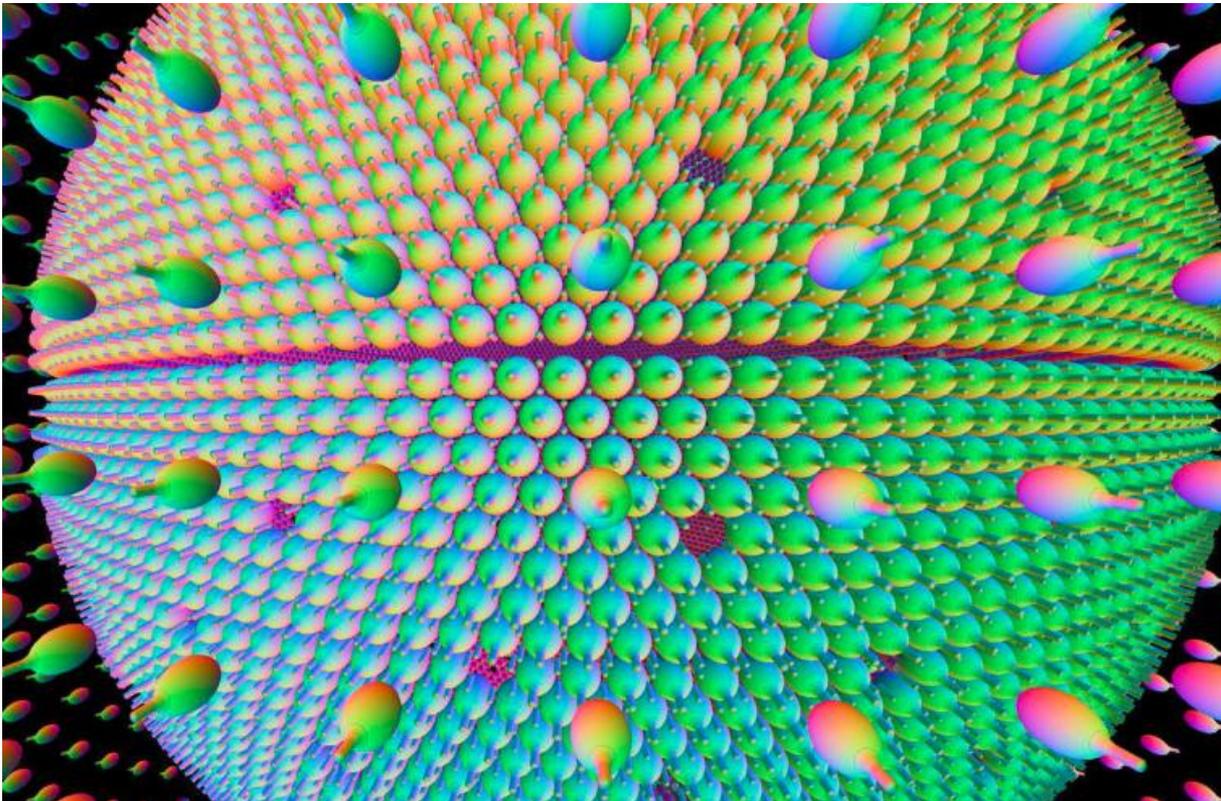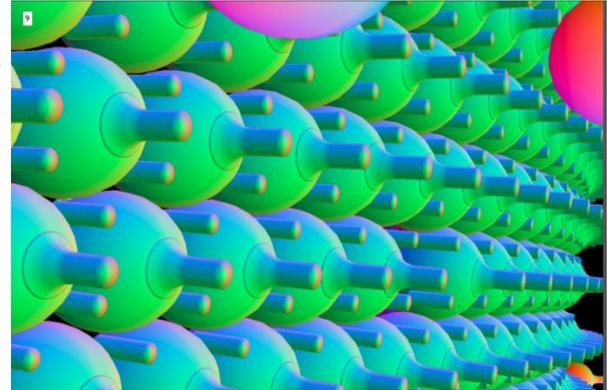

20 “ high QE PMTs

Two types of 20” PMTs used in JUNO

- 15k NNVT MCP-PMT: newly developed by North Night Vision Technology (NNVT), used for central detector and veto detector.
- 5k Hamamatsu R12860: used for central detector.



**NNVT
MCP-PMT**




**Hamamatsu
R12860**

Characteristics	MCP-PMT (NNVT)	R12860 (Hamamatsu)
Detection Eff. (QE × CE*area) (%)	27%, >24%	27%, >24%
P/V of SPE	3.5, >2.8	3, >2.5
TTS on the top point (ns)	~12, <15	2.7, <3.5
Rise time/Fall time(ns)	R~5; F~12	R~5, <7; F~9, <12
Anode Dark count(Hz)	20k, <30k	10k, <50k
After Pulse Percentage(%)	1, <2	10, <15
Glass Radioactivity(ppb)	²³⁸ U:50 ²³² Th:50 ⁴⁰ K:20	²³⁸ U:400 ²³² Th:400 ⁴⁰ K:40

3" PMTs


- The Double Calorimetry for central detector
 - ~36000 3" PMT
 - 3" Pmts are put into the gap between large 20" PMTs

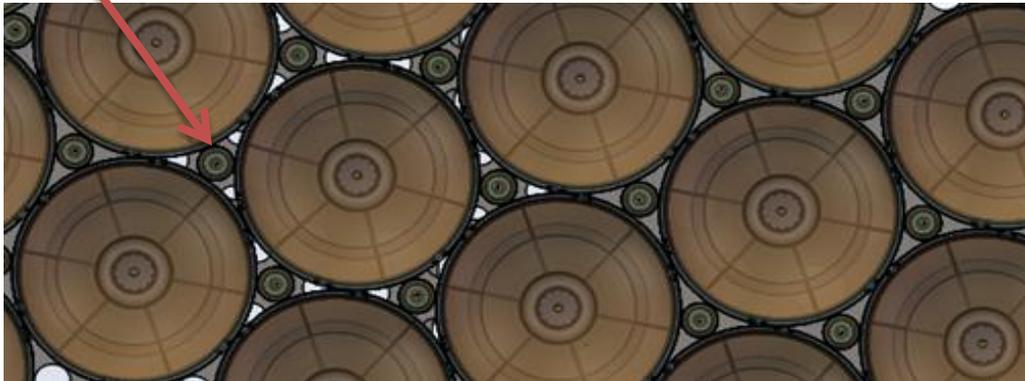

- An Independent system to cross calibrate the 20" PMT system;
- Extend the energy dynamical range beyond the region where large PMT are no more linear or even saturated;
- Lower TTS of the small PMTs with good time resolution for vertex reconstruction improvement;
- Improve muon tracking reconstruction with better timing for better $9\text{Li}/8\text{He}$ backgrounds control.

PMT protection

- The cover used for PMT protection was designed.
 - Prevent chain reaction due to shockwave from one PMT unknown implosion;
 - Including top cover(acrylic cover) and back cover(stainless steel cover);

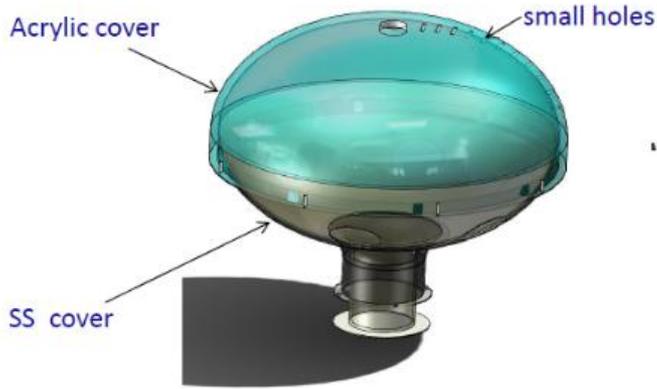


Implosion test in water

- Use one PMT implosion for trigger;
- Adjacent PMT with different types cover;




- ❑ All four 12mm acrylic covers survived after two implosion tests and is reliable to be our baseline.
- ❑ Stainless steel cover is strong enough for protection.

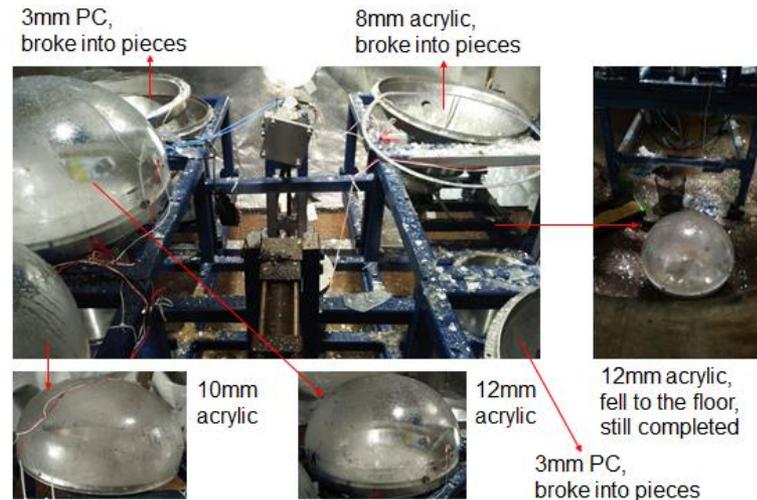

Calibration system


- Requirement: 3% energy resolution@1MeV and 1% energy scale uncertainty.
- Different tools for detector calibration
 - Automatic Calibration Unit (ACU): scan center axis
 - Cable Loop System (CLS): scan one vertical plane(2D)
 - Guide Tube Calibration System(GTCS): scan CD outer surface(boundary)
 - Remotely Operated under-liquid-scintillator Vehicles(ROV): scan the whole CD(3D)

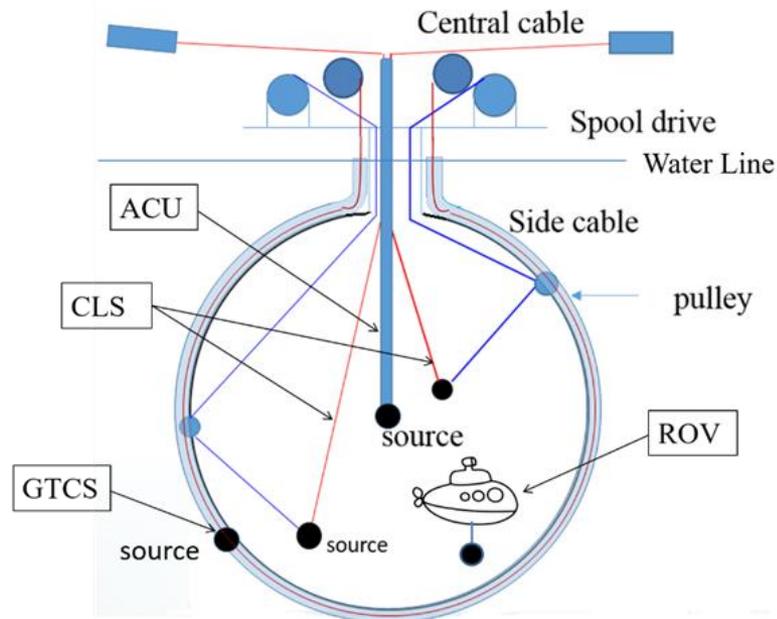

Veto system

- **Veto system**

- Water Cherenkov detector+Top tracker system
- Cosmogenic isotope reduction ($^9\text{Li}/^8\text{He}$) \rightarrow requires a precise muon track reconstruction
- Fast neutrons background rejection \rightarrow passive shielding and possible tagging
- Radioactivity from rock \rightarrow passive shielding by water

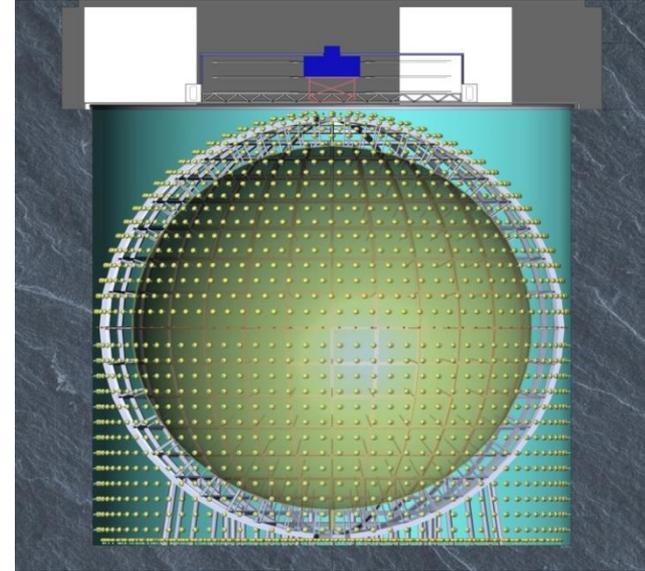

- **Water Cherenkov detector**

- **Detector Characteristics**

- ~2000 20 inch MCP-PMTs used for veto system
- Tyvek reflector film coated on surface to increase light collection efficiency
- Detector efficiency is expected to be $> 95\%$
- **Background Estimation:**
 - Fast neutron background $\sim 0.1/\text{day}$

- **Water system:**

- 20-30 kton ultrapure water in the pool
- Employ a circulation/polishing water system (~ 2 week one volume circulation)
- Keep a good water quality including radon control ($< 0.2 \text{ Bq/m}^3$)


Top Tracker

Total 62 walls will be rearranged in three horizontal layers to cover half of the top area. The three layers are spaced by 1 m .

This geometry allows to :

- Select “gold” muons for radioactive events reduction
- Ensure good muon tracking
- Perform a precise muon tracking and provide valuable information for cosmic muon induced ${}^9\text{Li}/{}^8\text{He}$ study

The detector will reuse the Target Tracker of the OPERA experiment.

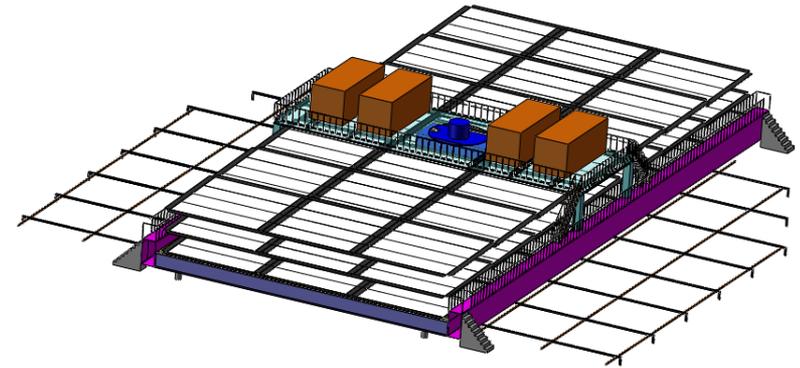

The Target Tracker consists of several wall. Each wall consist of 4 modules in horizontal position and 4 modules in vertical position, allowing a good tracking reconstruction capability.

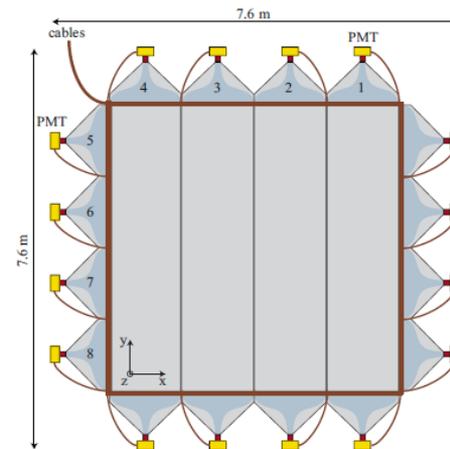


Fig. 3. Schematic view of a plastic scintillator strip wall.

Summary

JUNO will measure mass hierarchy (3—4 σ in 2026) and 3 oscillation parameters to <1% level.

JUNO also has a rich physics potential with supernova neutrinos, geo-neutrinos, solar neutrinos, and other oscillation physics such as searches for sterile neutrinos, among others.


•Schedule as following:

- Civil preparation: 2013-2014
- Civil construction: 2014-2018
- Detector component production: 2016-2017
- Detector assembly & installation: 2018-2019
- Filling & data taking: 2020

JUNO Collaboration



Country	Institute
Armenia	Yerevan Physics Institute
Belgium	Universite libre de Bruxelles
Brazil	PUC
Brazil	UEL
Chile	PCUC
Chile	BISEE
China	Beijing Normal U.
China	CAGS
China	ChongQing University
China	CIAE
China	DGUT
China	ECUST
China	Guangxi U.
China	Harbin Institute of Technology
China	IHEP
China	Jilin U.
China	Jinan U.
China	Nanjing U.
China	Nankai U.
China	NCEPU
China	Pekin U.
China	Shandong U.
China	Shanghai JT U.
China	IMP-CAS
China	SYSU
China	Tsinghua U.
China	UCAS
China	USTC
China	U. of South China
China	Wu Yi U.
China	Wuhan U.
China	Xi'an JT U.

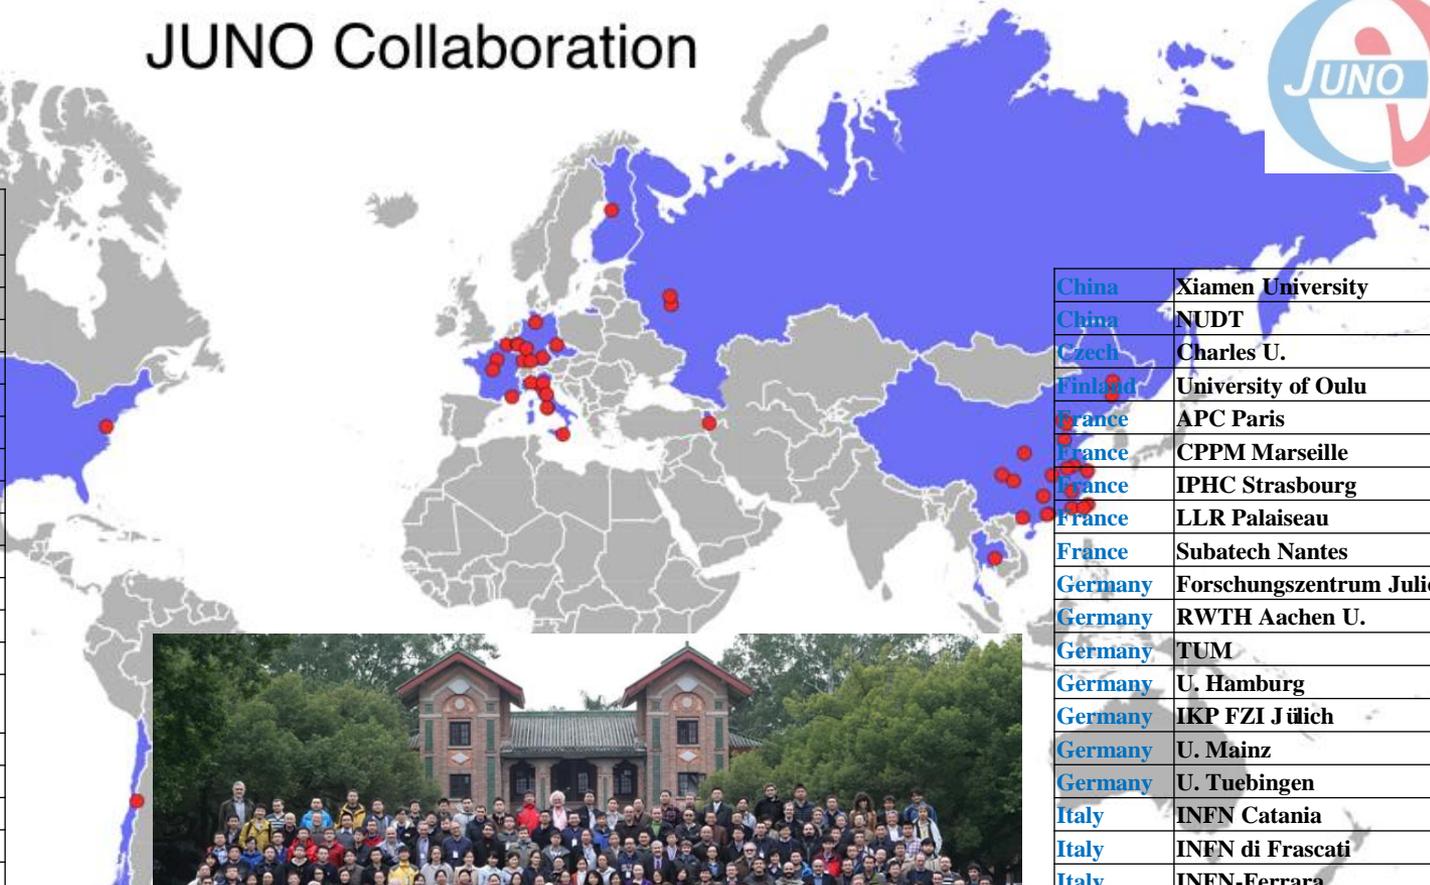

China	Xiamen University
China	NUDT
Czech	Charles U.
Finland	University of Oulu
France	APC Paris
France	CPPM Marseille
France	IPHC Strasbourg
France	LLR Palaiseau
France	Subatech Nantes
Germany	Forschungszentrum Julich
Germany	RWTH Aachen U.
Germany	TUM
Germany	U. Hamburg
Germany	IKP FZI Jülich
Germany	U. Mainz
Germany	U. Tuebingen
Italy	INFN Catania
Italy	INFN di Frascati
Italy	INFN-Ferrara
Italy	INFN-Milano
Italy	INFN-Milano Bicocca
Italy	INFN-Padova
Italy	INFN-Perugia
Italy	INFN-Roma 3
Pakistan	PINSTECH
Russia	INR Moscow
Russia	JINR
Russia	MSU
Taiwan	National Chiao-Tung U.
Taiwan	National Taiwan U.
Taiwan	National United U.
Thailand	SUT
USA	UMD1
USA	UMD2


Collaboration established in July 2015
Now: 66 institutions
444 collaborators
8 observers

Thanks!

Back up

Comparison with Other Experiments

M. Blennow et al., JHEP 1403 (2014) 028

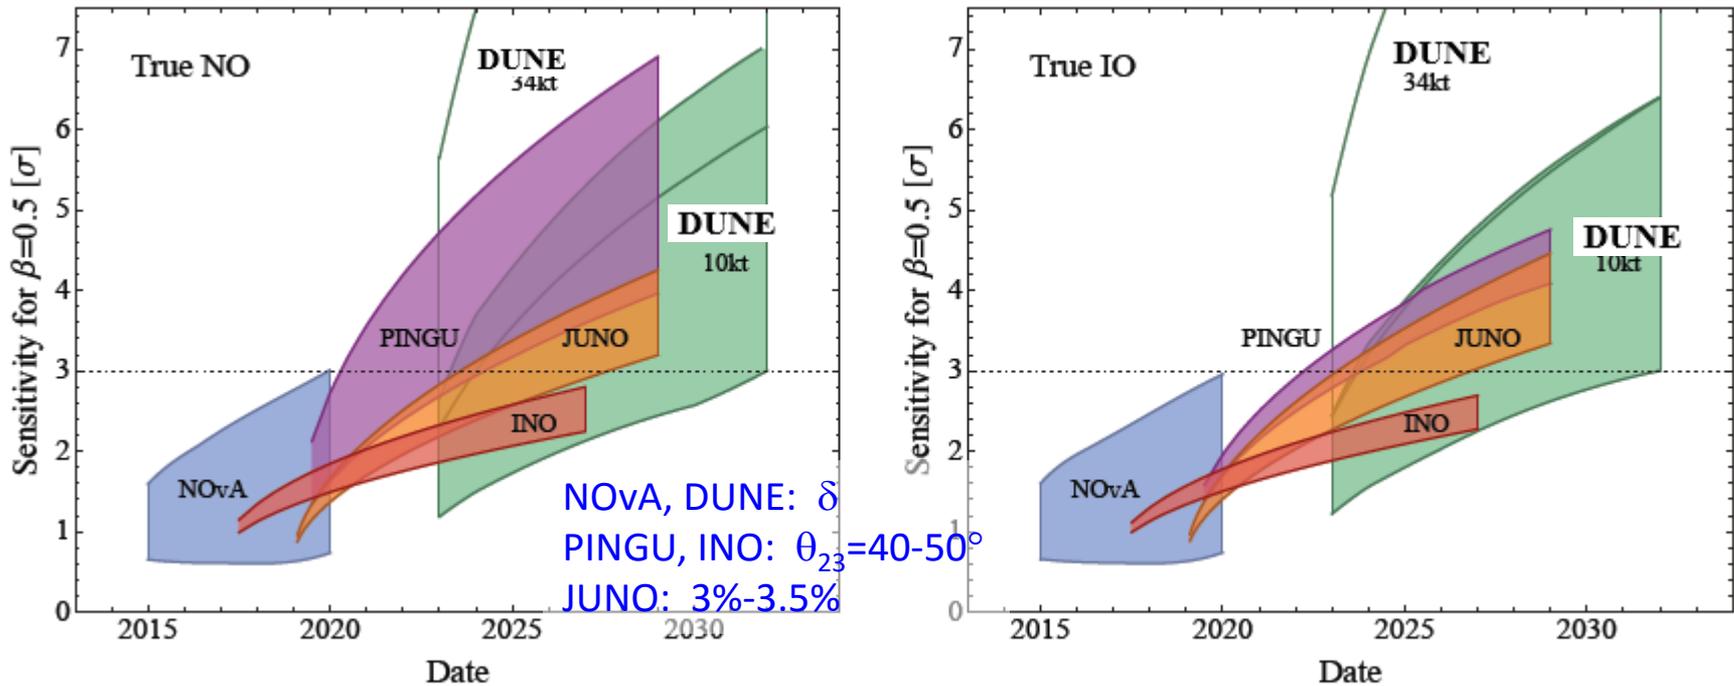

- JUNO is unique for measuring MH using reactor neutrinos
 - Independent of the CP phase and free from the matter effect: complementary to accelerator-based experiments
 - Competitive in time
 - Many other science goals