

# THE sPHENIX TPC

- **Klaus Dehmelt**
- **CEPC 2020**
- **October 26, 2020**



Stony Brook **University**


The State University of New York





# sPHENIX AND THE TIME PROJECTION CHAMBER

2

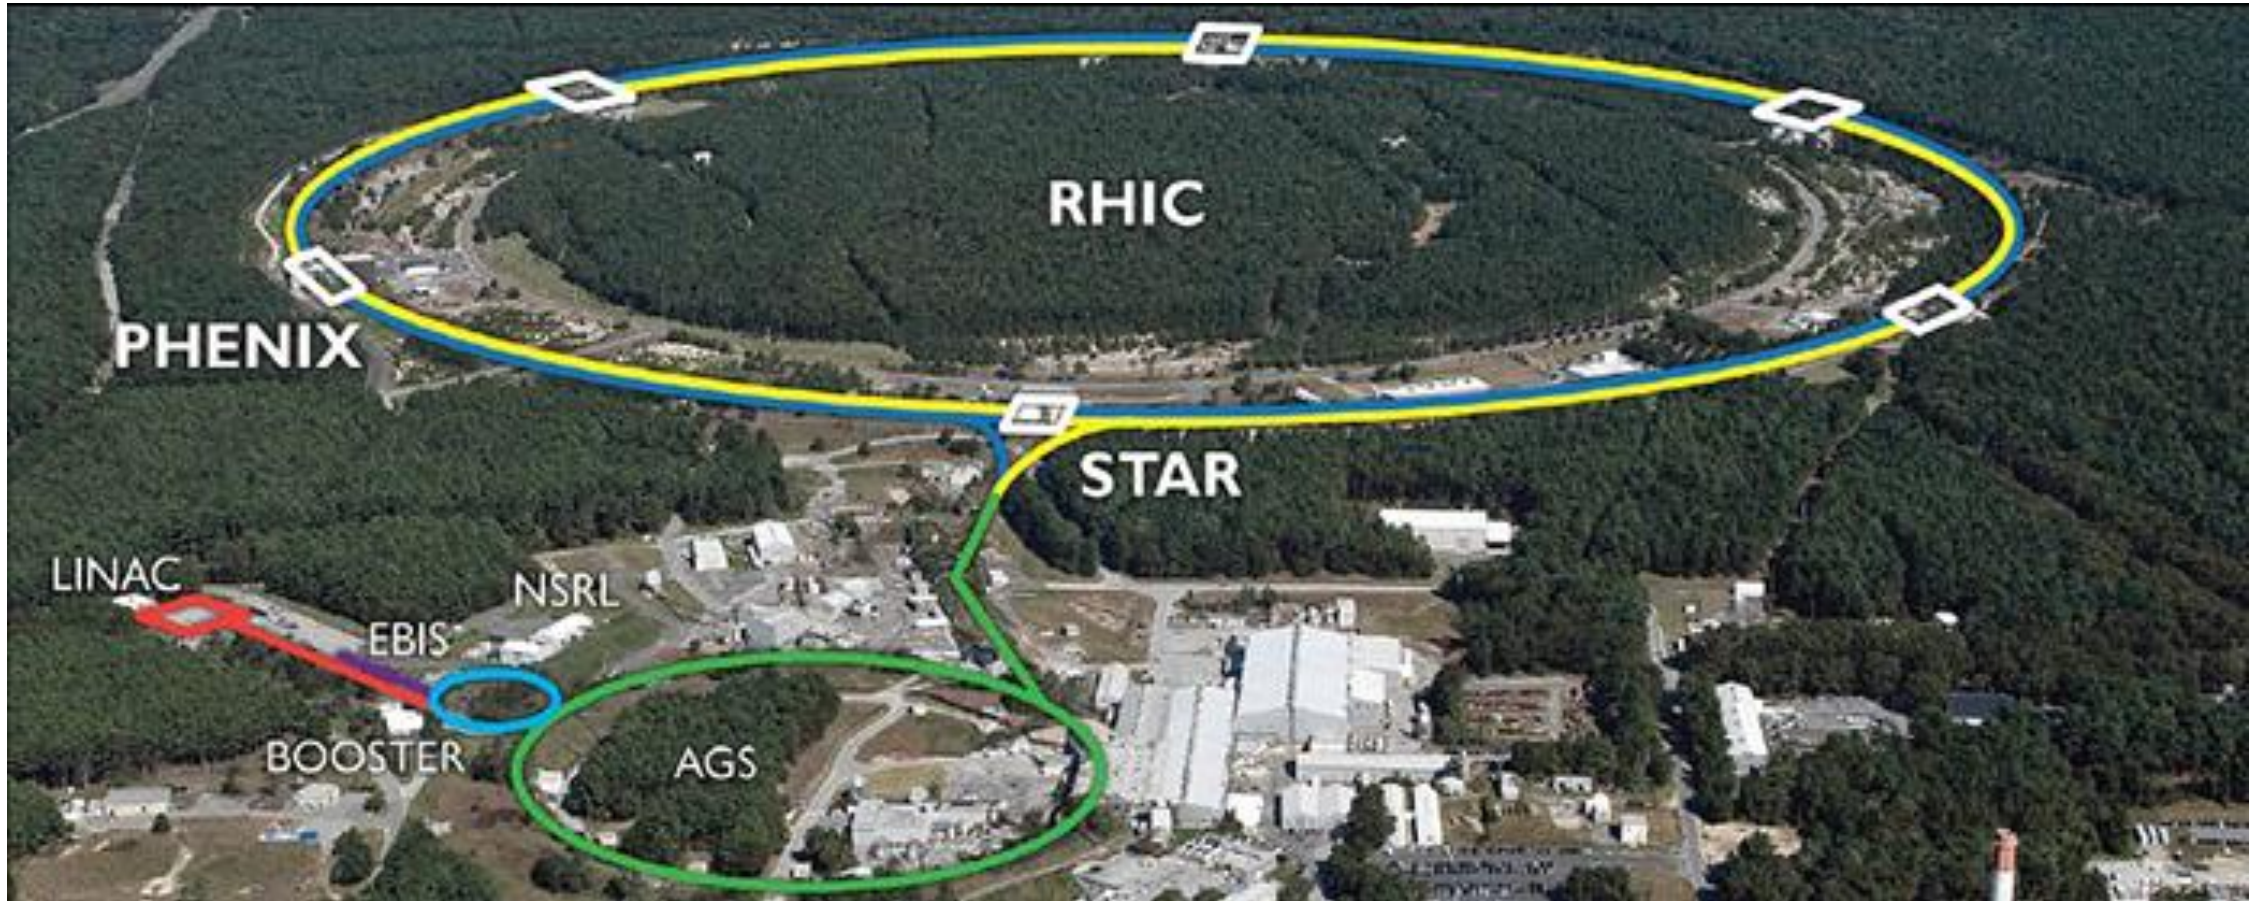




# sPHENIX AND THE TIME PROJECTION CHAMBER


- sPHENIX @ the Relativistic Heavy Ion Collider RHIC in 2023

2

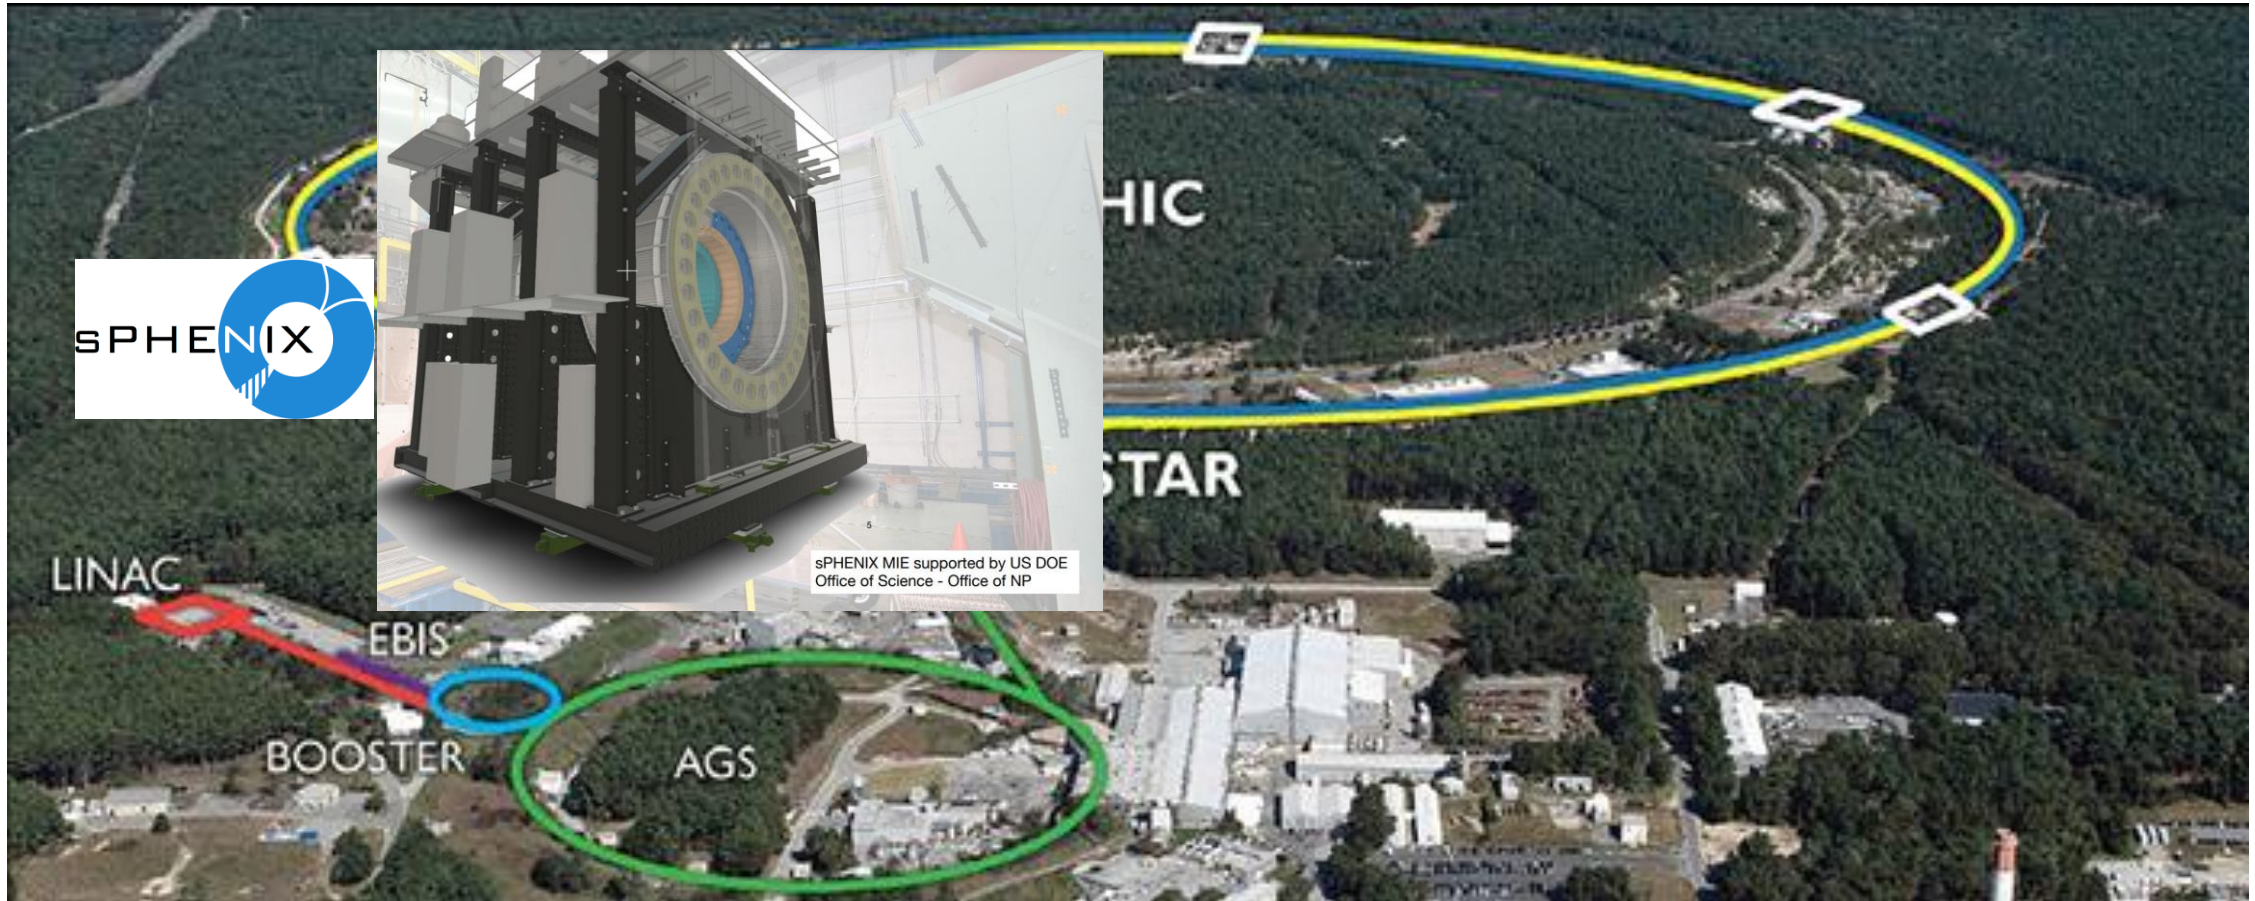


## Jet cor. & substructure

Vary momentum/angular size of probe

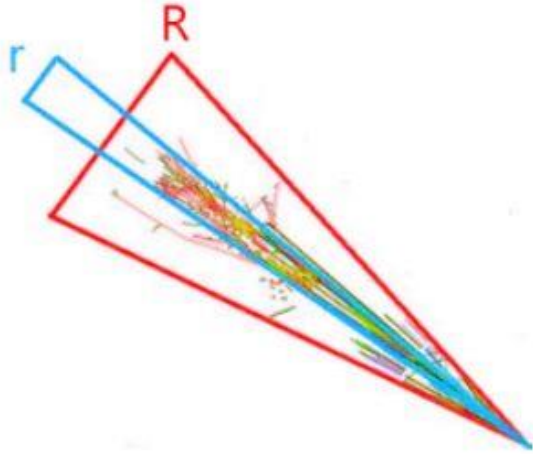


## Parton energy loss

Vary mass/momentum of probe

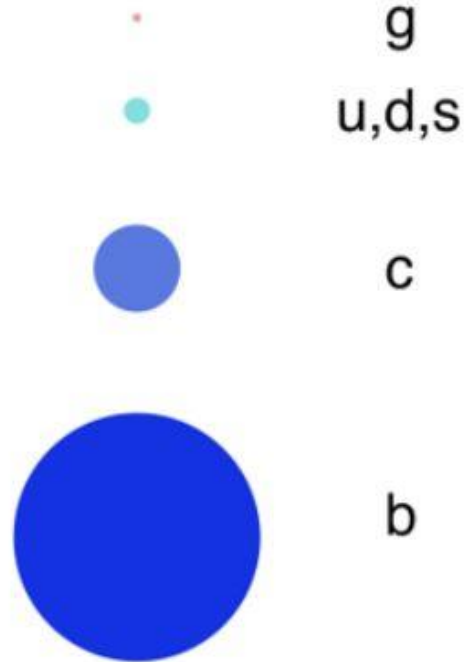


## Upsilon spectroscopy

Vary size of the probe

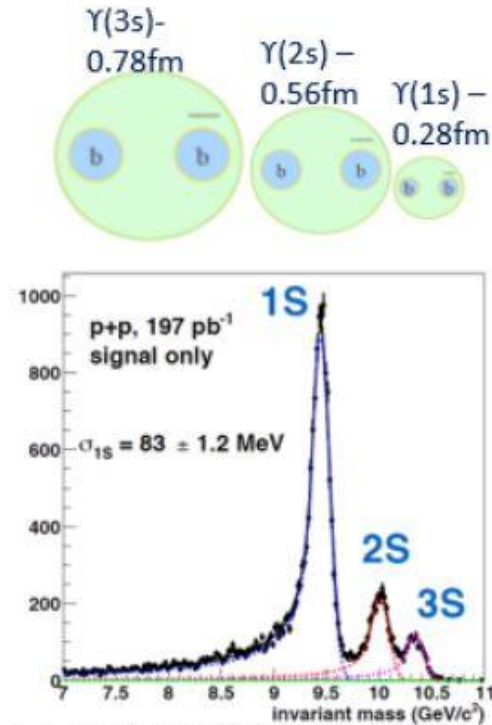

## Cold QCD

Vary temperature of QCD matter

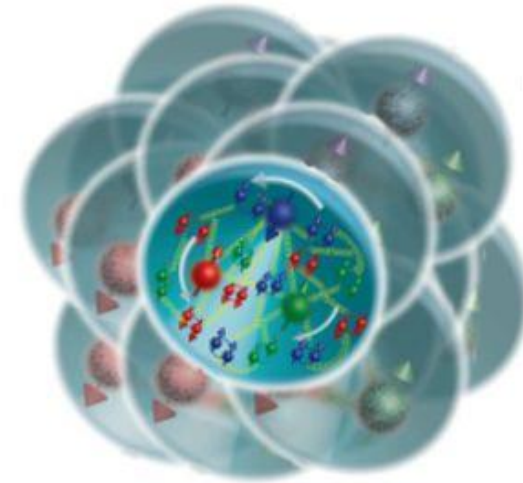




Physics Goal	Detector Requirement
Fragmentation Functions	Excellent Momentum Resolution: $dp/p \sim 0.2\%$ for $p$ to $> 40$ GeV/c
Jet Substructure	Excellent track pattern recognition
Distinguish Upsilon States	Mass resolution: $\sigma_M < 100$ MeV/c <sup>2</sup>
Heavy Flavor jet tagging	Precise DCA resolution $\sigma_{DCA} < 100$ $\mu$ m
High Statistics Au+Au 200 GeV	Handle multiplicity and full RHIC luminosity

- Accomplished by
  - ✦ 3-layer Si-pixel detector (MAPS)
  - ✦ 4-layer Si-strip detector (Intermediate tracker)
  - ✦ Compact Time-Projection Chamber (TPC)
- TPC  $\rightarrow$  continuous readout, small space charge distortion
- Barrel solenoid magnet (Babar) dictates dimension of TPC
  - ✦  $20 \text{ cm} < \text{radius} < 78 \text{ cm}$ ,  $2\pi$  azimuthal coverage
  - ✦ Total length = 211 cm  $\rightarrow |\eta| < 1.1$  polar coverage

# CHALLENGE: SPACE CHARGE IN sPHENIX TPC @ RHIC

4



- Head-on collisions Au-Au @ 200 GeV/nucleon at RHIC produce thousands of particles

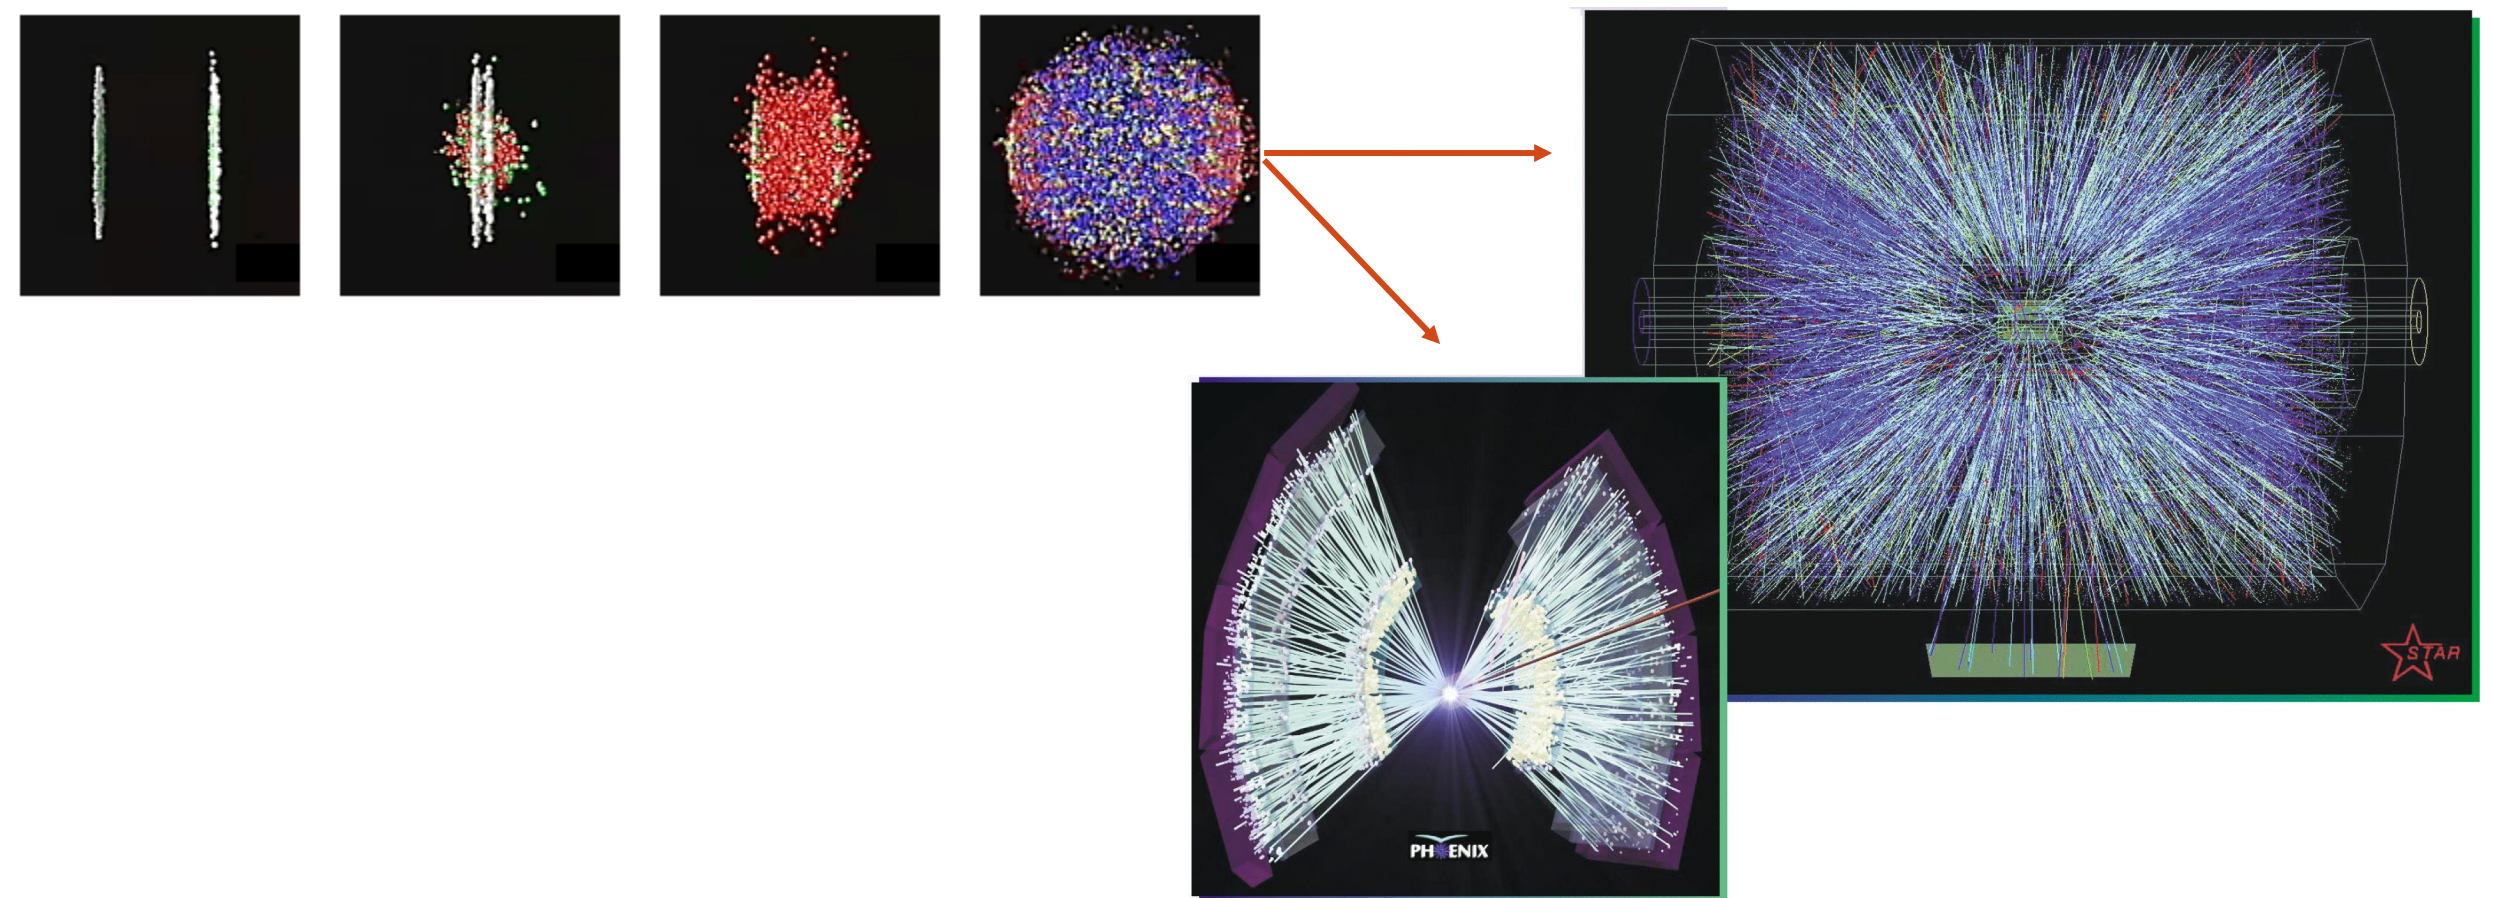

# CHALLENGE: SPACE CHARGE IN sPHENIX TPC @ RHIC

4

- Head-on collisions Au-Au @ 200 GeV/nucleon at RHIC produce thousands of particles

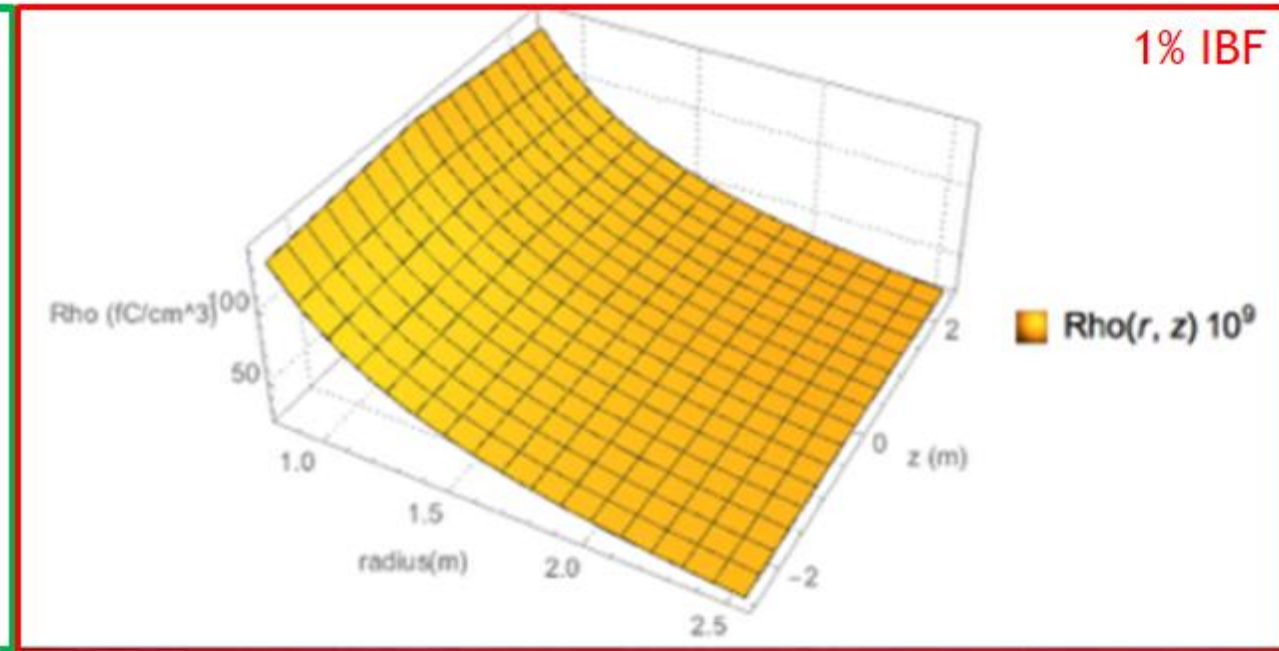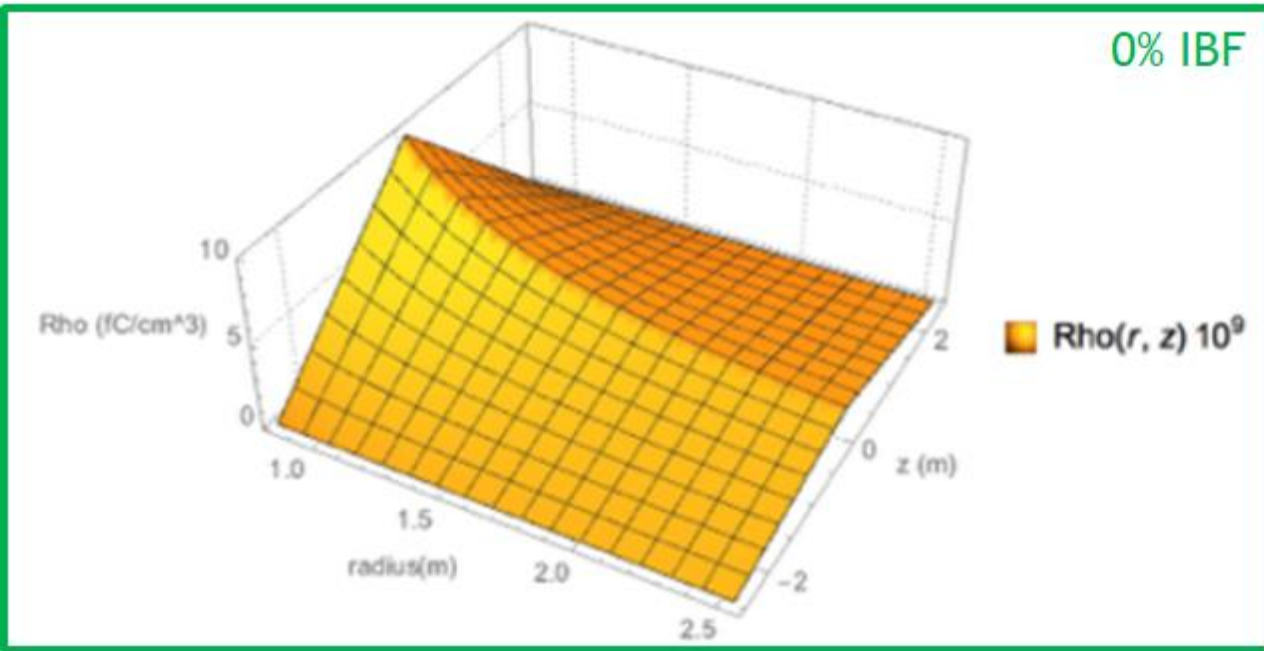

# CHALLENGE: SPACE CHARGE IN sPHENIX TPC @ RHIC

4

- Head-on collisions Au-Au @ 200 GeV/nucleon at RHIC produce thousands of particles
- Focus on combatting Ion Back Flow IBF



# TIME PROJECTION CHAMBERS IN COLLIDER ENVIRONMENT SO FAR

5

- PEP4 @ SLAC
- ALEPH/DELPHI @ LEP
- STAR @ RHIC
- ALICE @ LHC
  - All had in common: MWPC amplification readout
  - Today's drawback
    - ❖ Spatial arrangement of wires -> spatial resolution
    - ❖ Slow ion signal
    - ❖ Ion backflow reduction only possible with active gating
  - Spatial resolution:  $\mathbf{E} \times \mathbf{B}$  effect
  - Gate option limits high rate readout
- Solution: MPGD readout → overcome  $\mathbf{E} \times \mathbf{B}$ , fast  $e^-$  signal, **combat Ion Back Flow w/o gating**, ALICE TPC already upgraded!

# MPGD BASED TIME PROJECTION CHAMBER


6

- Time Projection Chamber (TPC) for
  - Momentum measurement
  - Tracking
  - Probably particle identification (PID), e.g.,  $dE/dx$



# MPGD BASED TIME PROJECTION CHAMBER




6

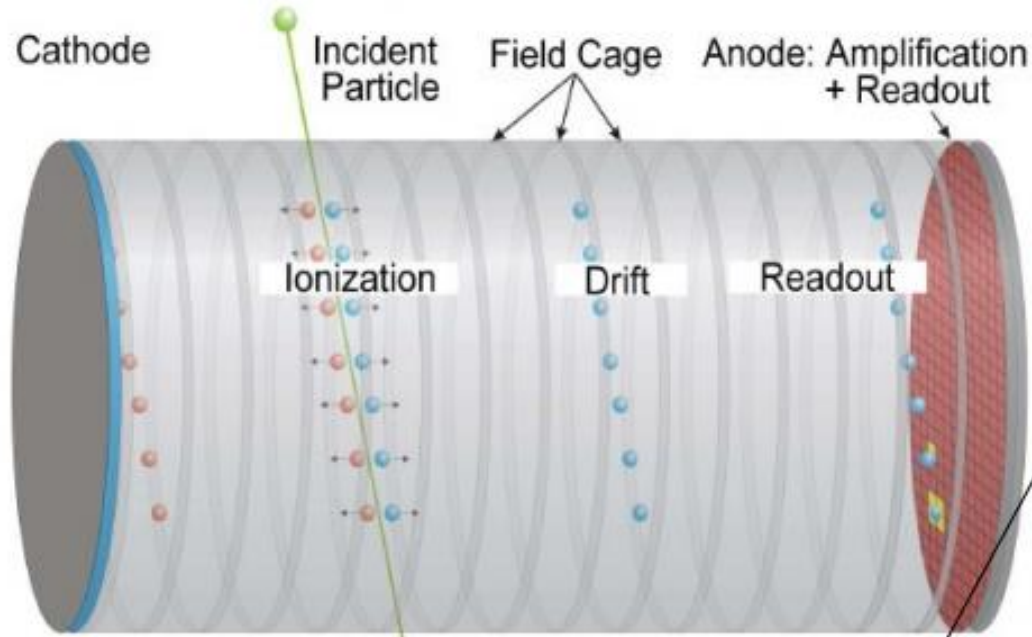

MicroPattern Gas Detector  
MPGD


not limited by  $\mathbf{E} \times \mathbf{B}$  effects

Gas Electron Multiplier GEM

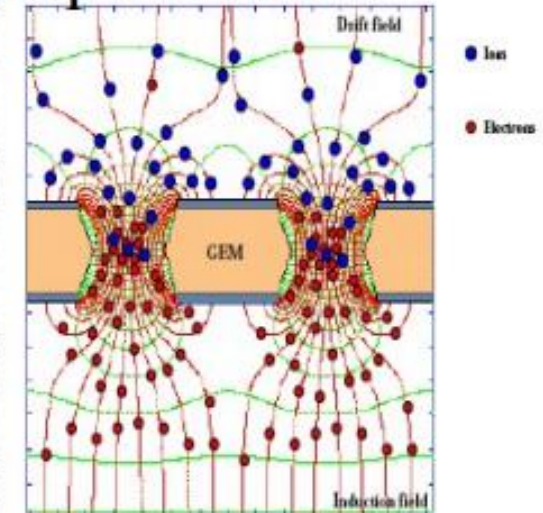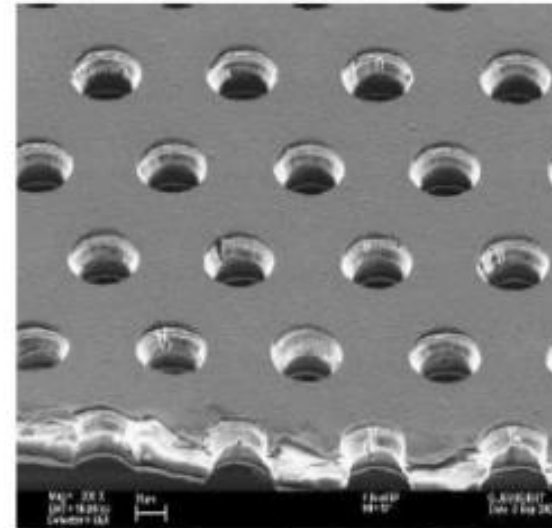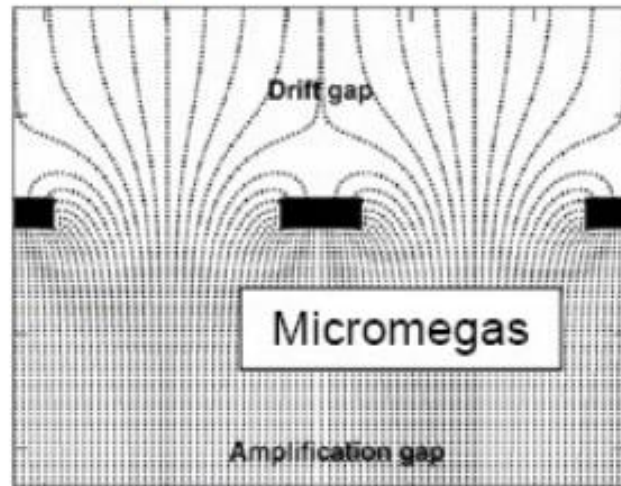


# sPHENIX AND THE TIME PROJECTION CHAMBER

7

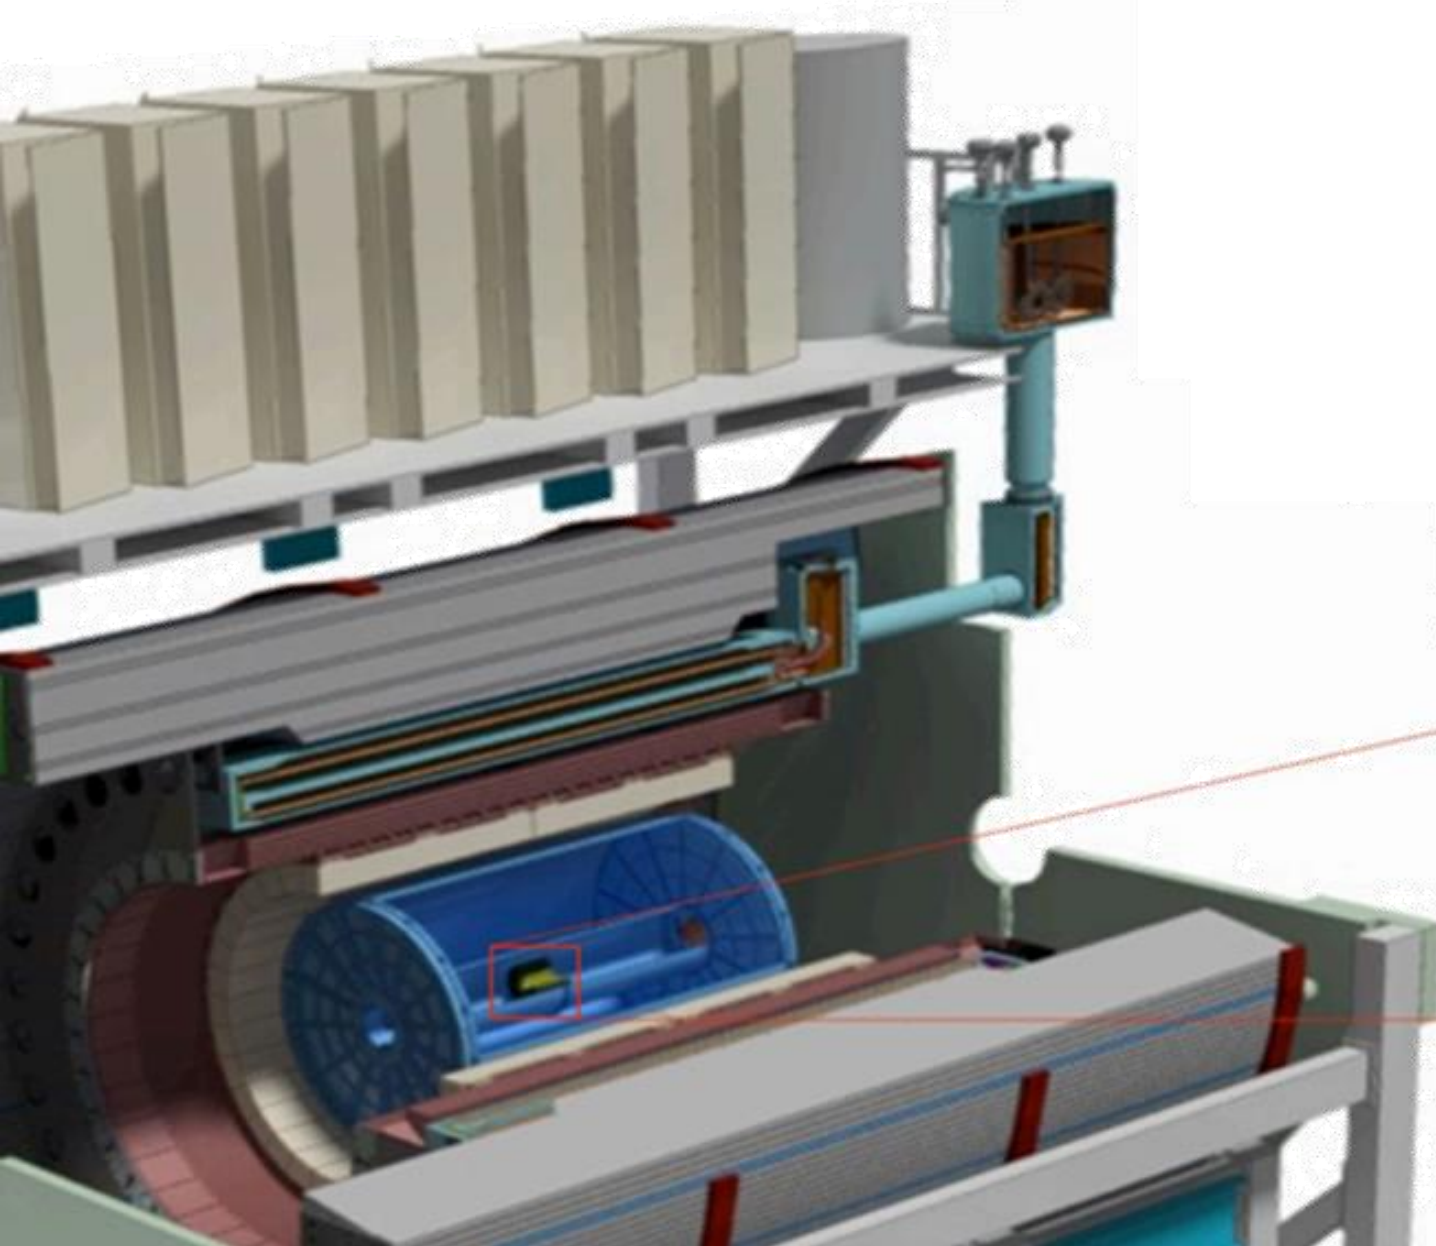

**INTT**

Silicon strips, 2 layers  
re-use of PHENIX FVTX electronics

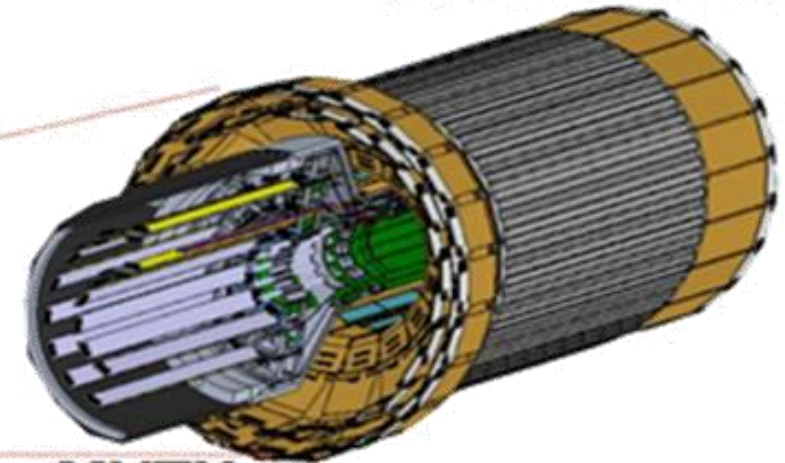

**MVTX**


Monolithic Active Pixel Sensors (MAPS),  
3 layers, based on ALICE ITS IB detector





# sPHENIX AND THE TIME PROJECTION CHAMBER

7

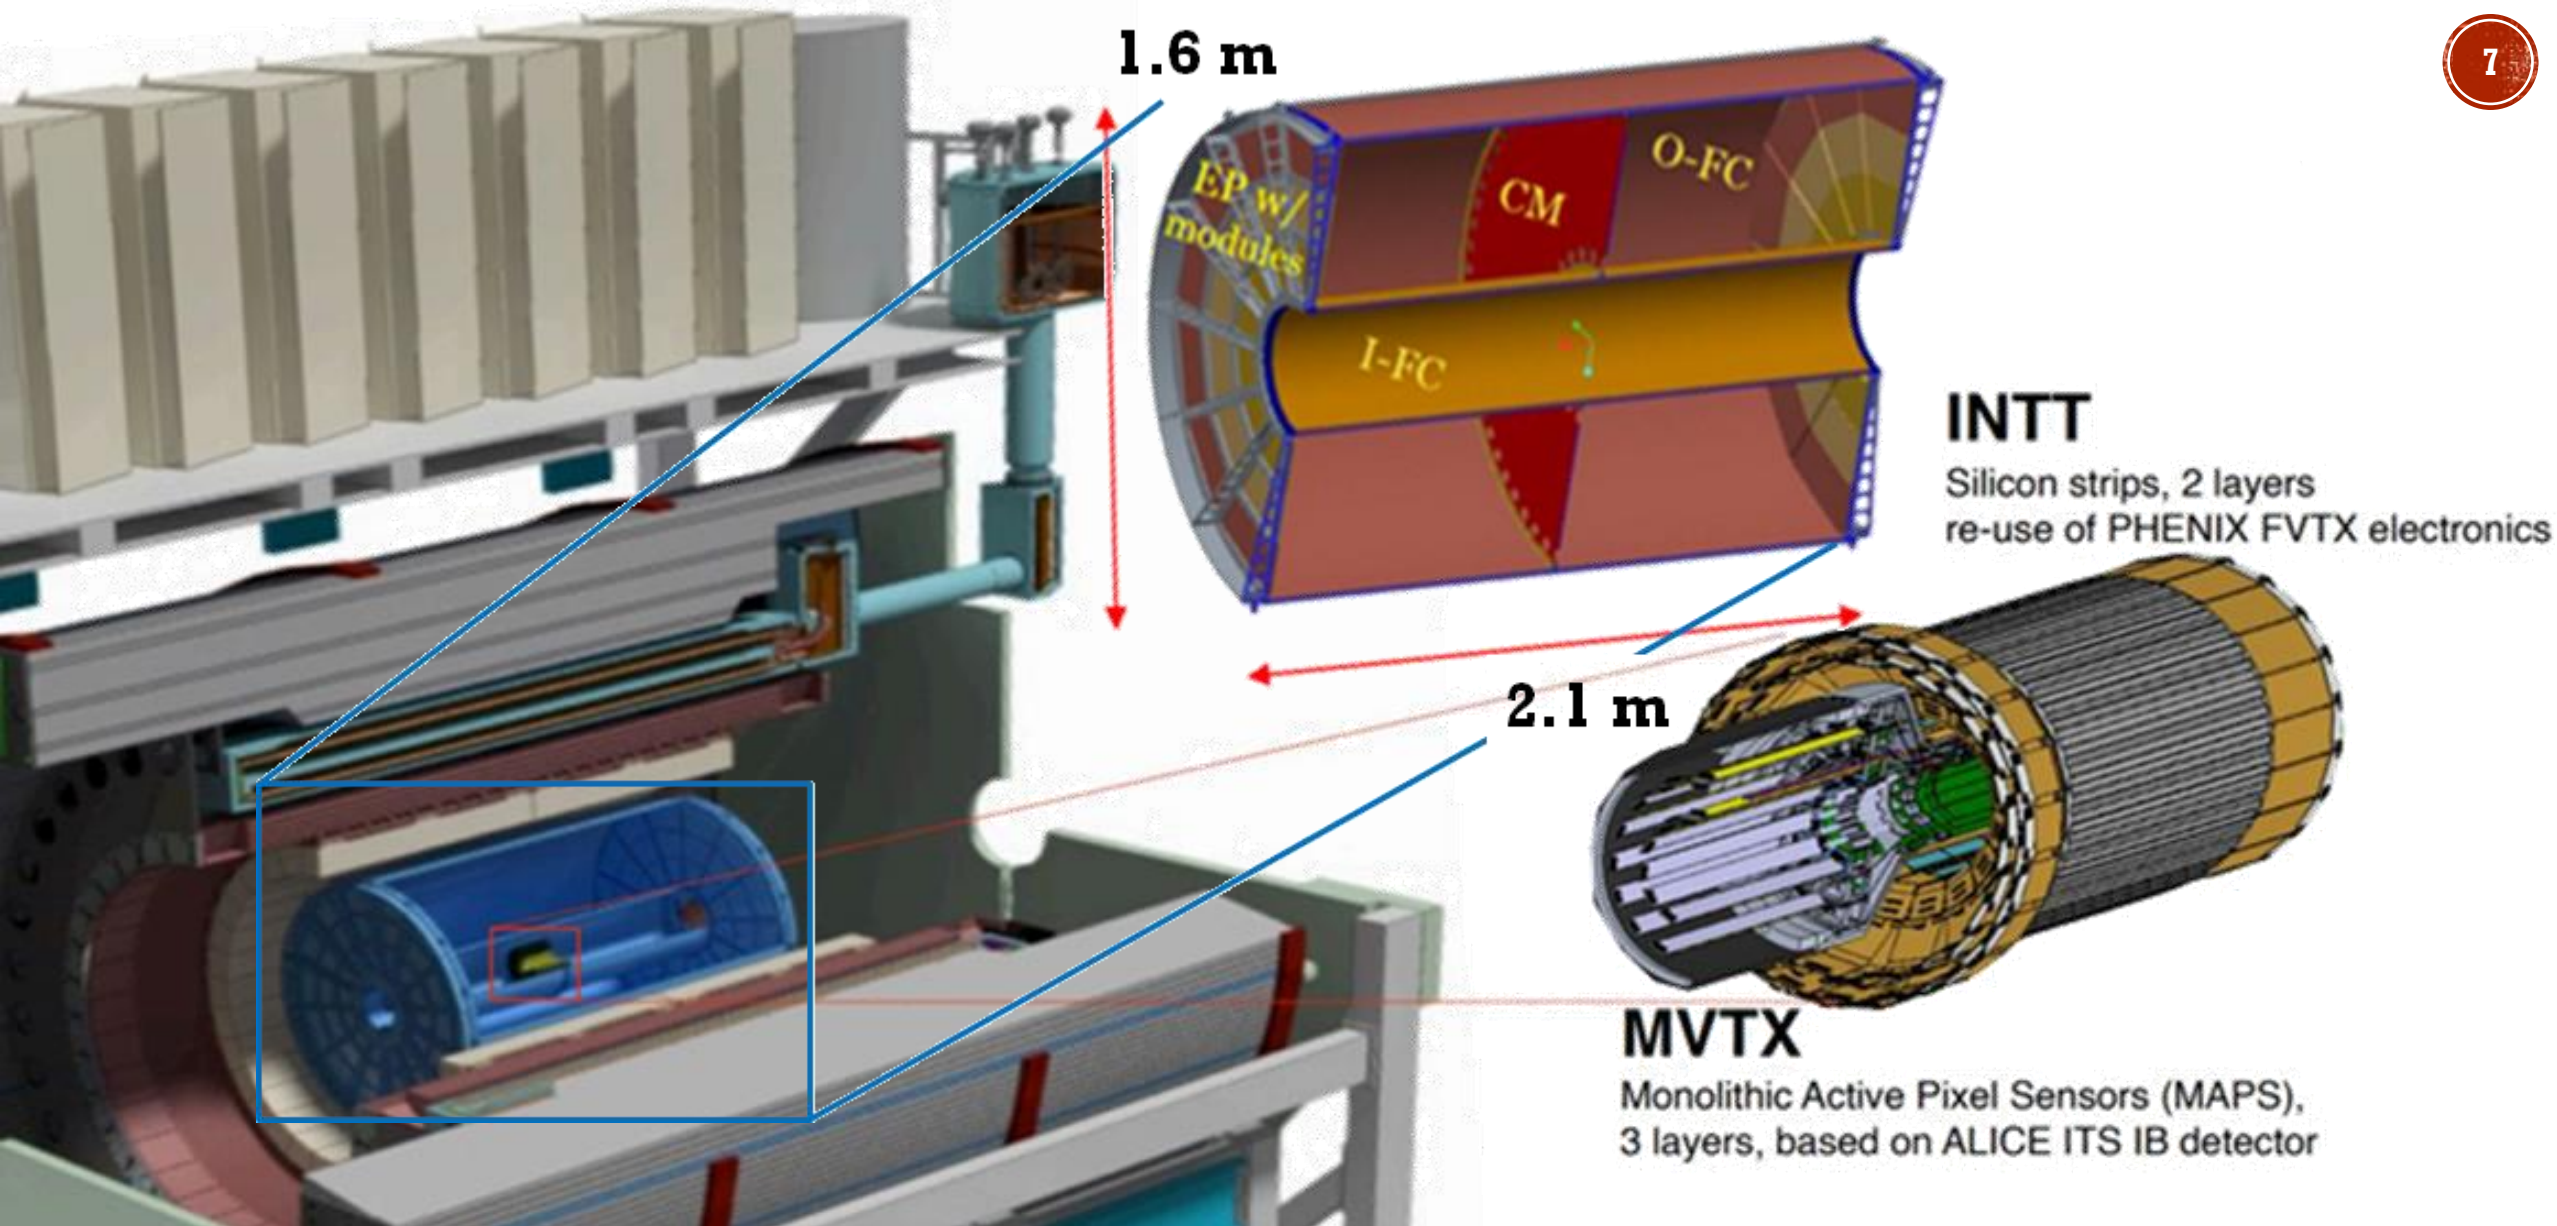

Make the ions fast through mass


$$v_{ion} = K \cdot E$$

with      K: ion mobility  
             E: Electric field

$$\frac{1}{K_{tot}} = \frac{f_1}{K_1} + \frac{f_2}{K_2} + \frac{f_3}{K_3} + \dots$$

→ Choose primary gas component with low mass: Ne-based (e.g., Ne-CF<sub>4</sub> 90-10)

Choose largest drift field possible

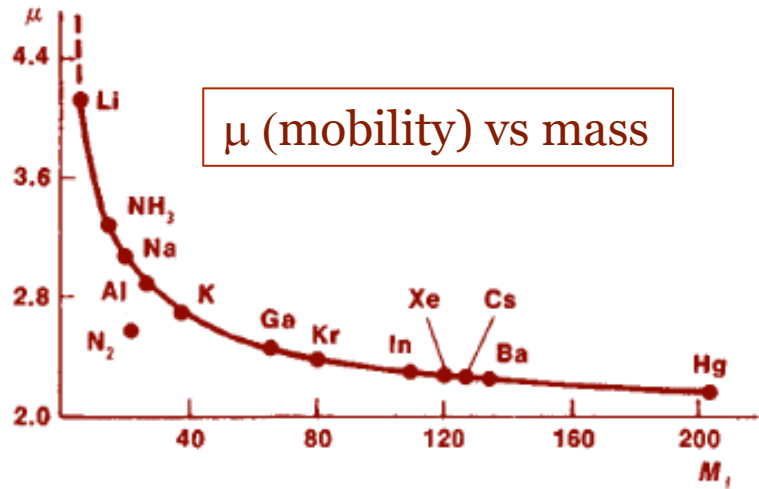

Gas	K ( $\frac{cm^2}{Volt \cdot sec}$ )	$v_D$ ( $E = 130 \frac{V}{cm}$ )	$v_D$ ( $E = 400 \frac{V}{cm}$ )
Ar	1.51	196	604
Ar-CH <sub>4</sub> 90:10	1.56	203(STAR)	624
Ar-CO <sub>2</sub> 90:10	1.45	189	582
Ne	4.2	546	1680
Ne-CH <sub>4</sub> 90:10	3.87	503	1547
Ne-CO <sub>2</sub> 90:10	3.27	425	1307(ALICE)
He	10.2	1326	4080
He-CH <sub>4</sub> 90:10	7.55	981	3019
He-CO <sub>2</sub> 90:10	5.56	722	2222
T2K	1.46	190(ILC)	584



Optimize amplification device's operating point: Gain on first GEM determines desired properties → compromise between energy resolution and IBF

## Quad-GEM Solution for ALICE

R. Majka


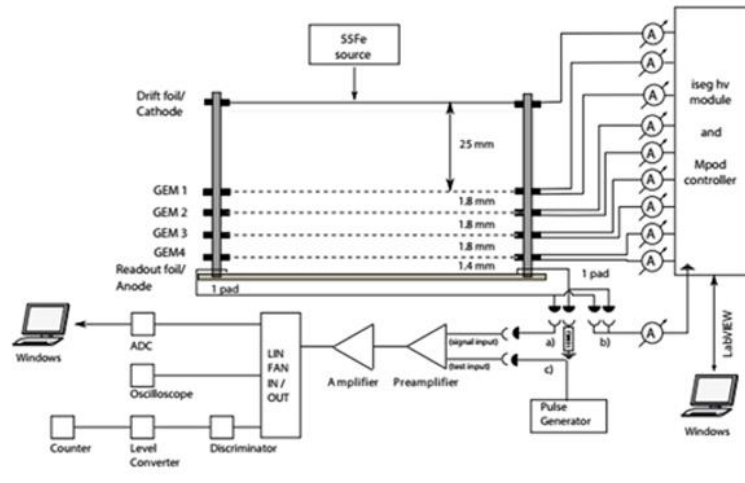


Figure 5.1: Sketch of the Munich quadruple GEM setup.

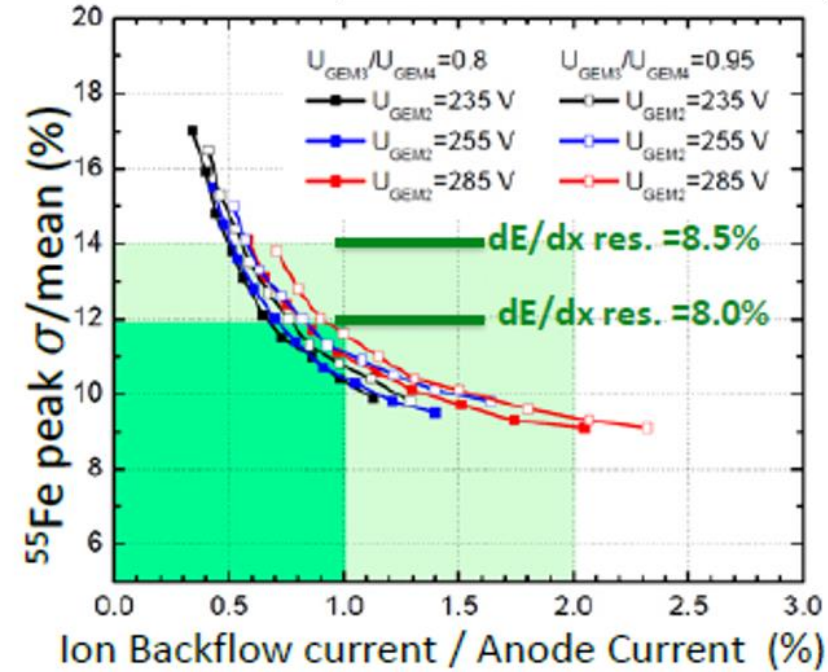

Optimize amplification device's operating point: Gain on first GEM determines desired properties → compromise between energy resolution and IBF

## Quad-GEM Solution for ALICE

R. Majka


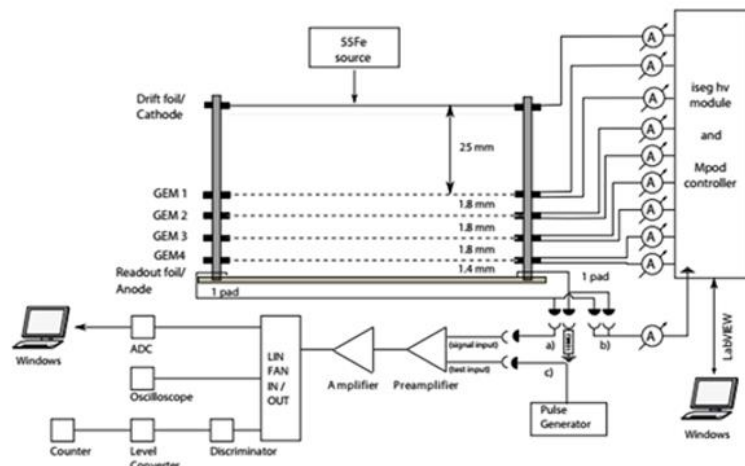


Figure 5.1: Sketch of the Munich quadruple GEM setup.

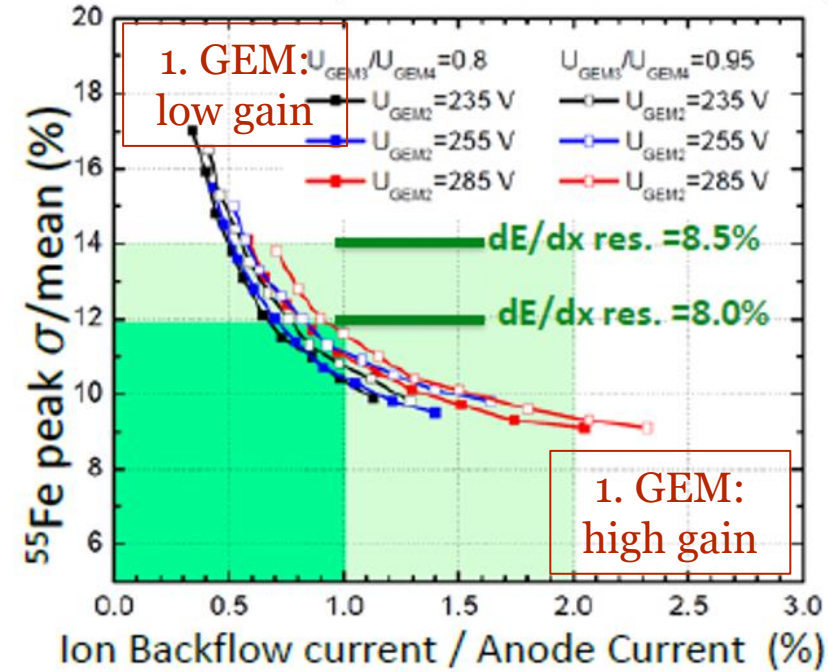

Optimize amplification device's operating point: Gain on first GEM determines desired properties → compromise between energy resolution and IBF

## Quad-GEM Solution for sPHENIX

R. Majka


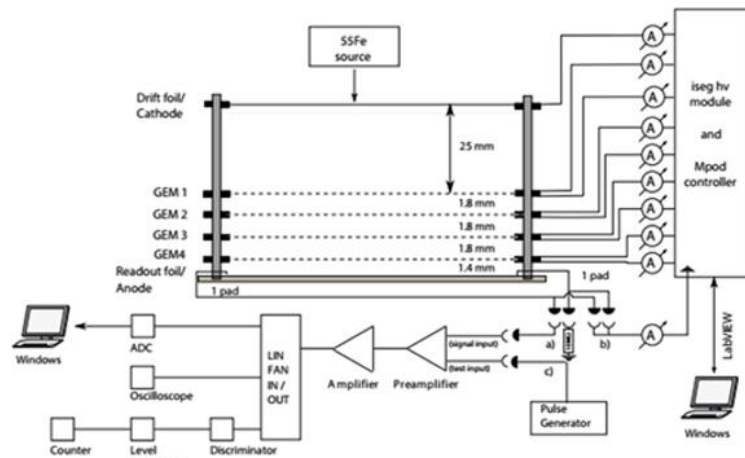


Figure 5.1: Sketch of the Munich quadruple GEM setup.



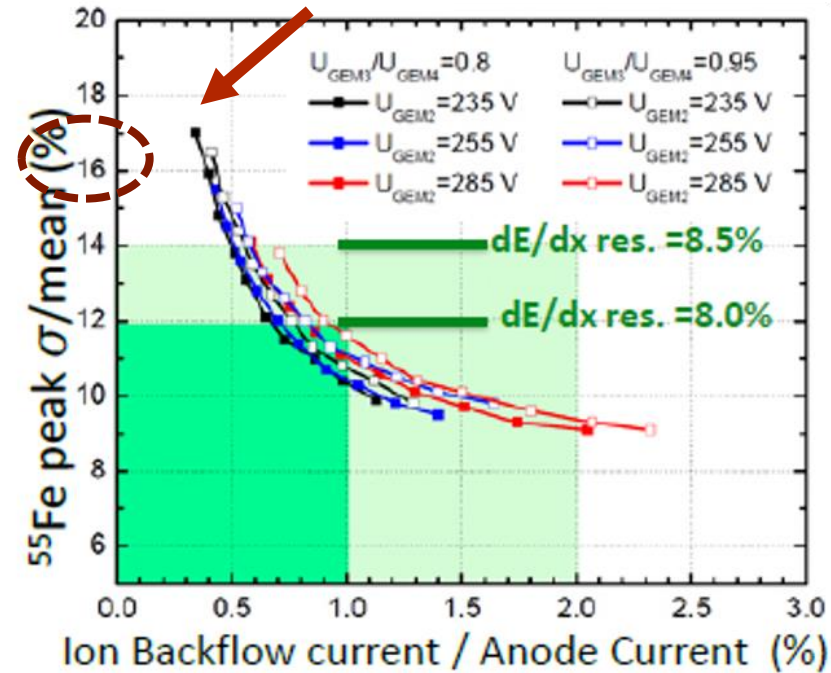

Optimize amplification device's operating point: Gain on first GEM determines desired properties → compromise between energy resolution and IBF

## Quad-GEM Solution for EIC Detector

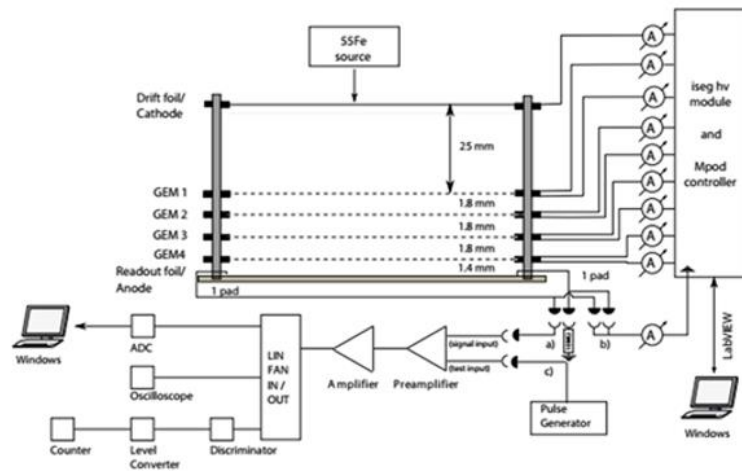



Figure 5.1: Sketch of the Munich quadruple GEM setup.

Recover  $dE/dx$  when environment allows

## Update design of field cage informed by current experience

Space charge distortions at maximum where space charge density has discontinuity → FC entrance windows

Analytical 3-D model based on work for ALICE TPC revealed large distortions close to inner FC

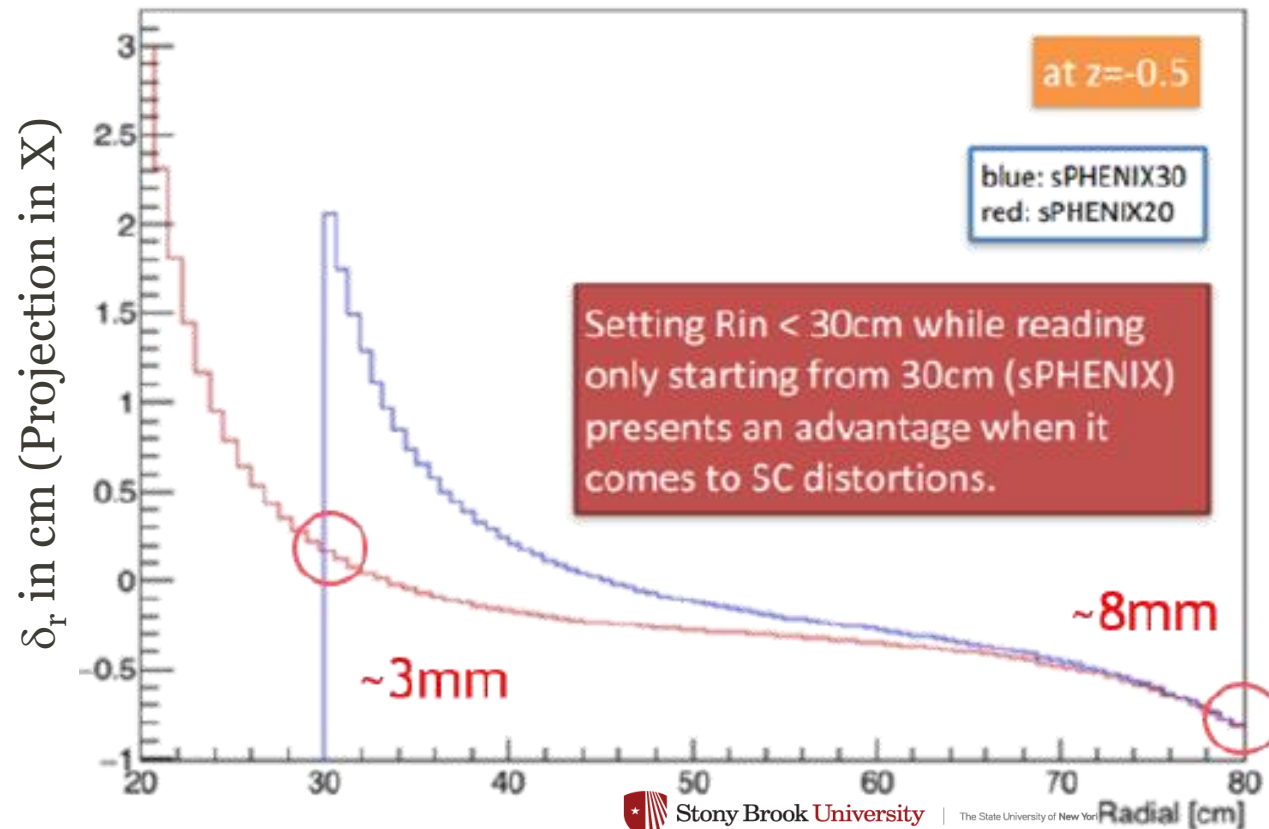


Set  $r = 20\text{ cm}$   
but make volume at  
 $r > 30\text{ cm}$  active

# sPHENIX TIME PROJECTION CHAMBER

11

- Field Cage → Inner/Outer for sPHENIX

- Hybrid between STAR and ILD

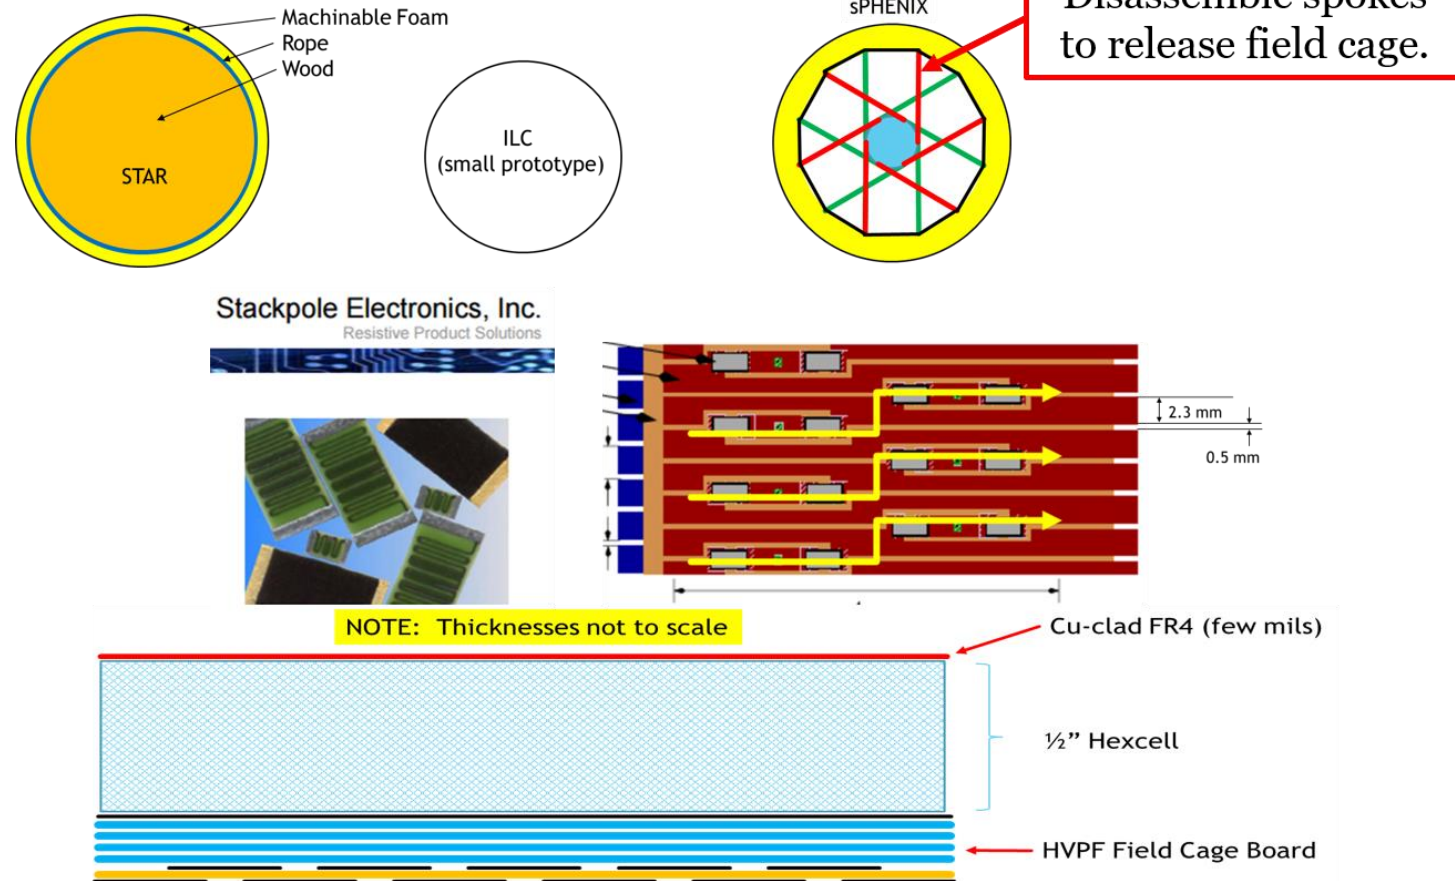





# sPHENIX TIME PROJECTION CHAMBER

11

- Field Cage → Inner/Outer for sPHENIX
  - Hybrid between STAR and ILD

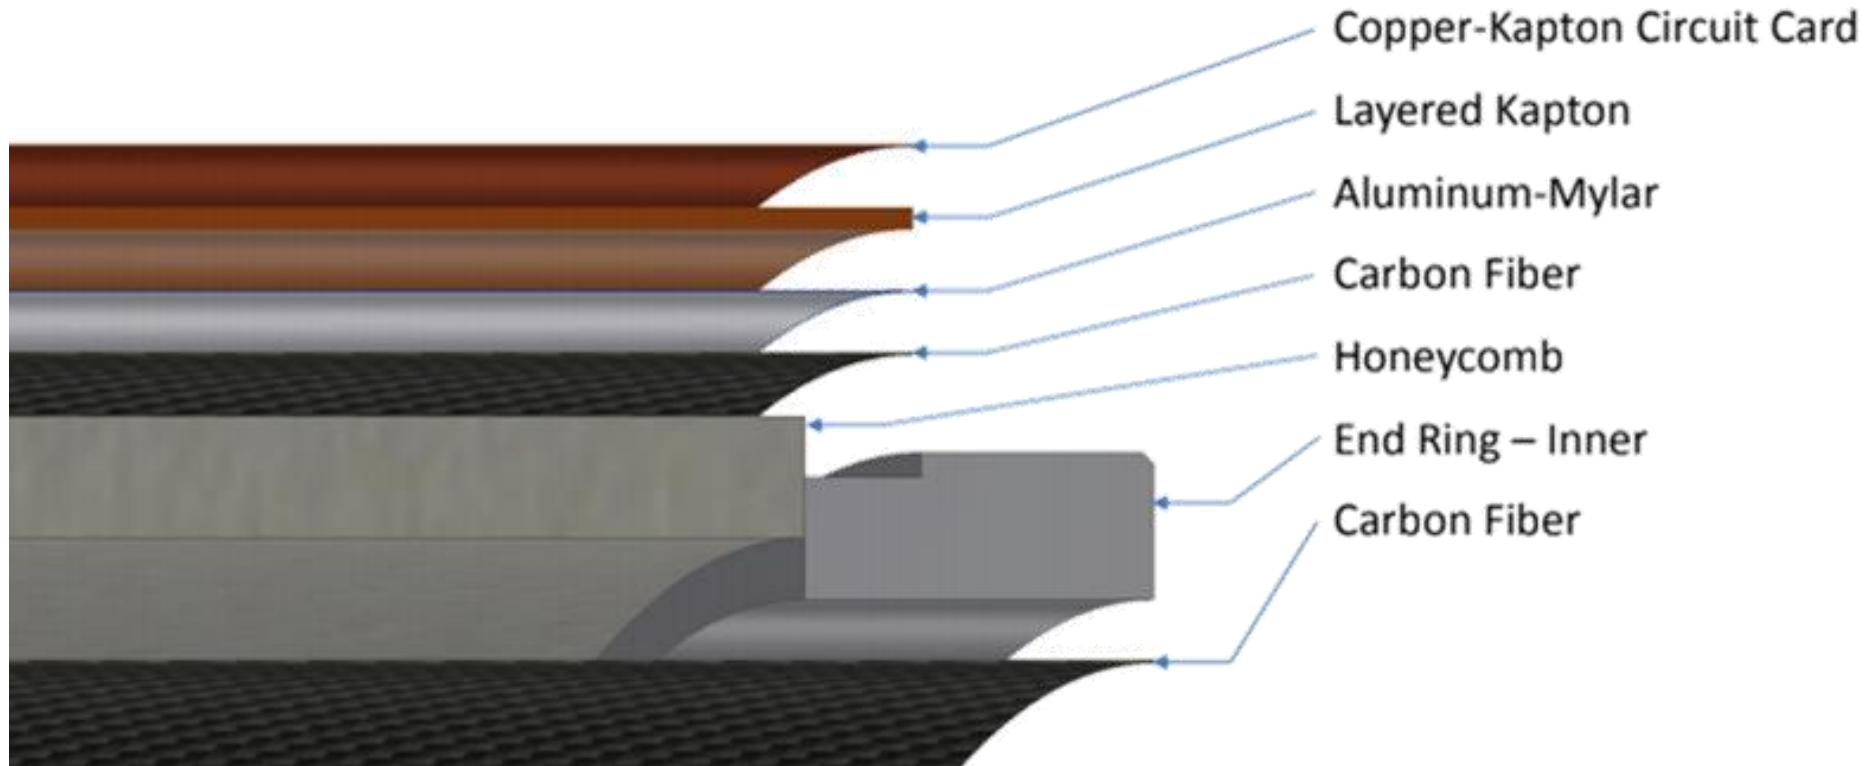

# sPHENIX TIME PROJECTION CHAMBER



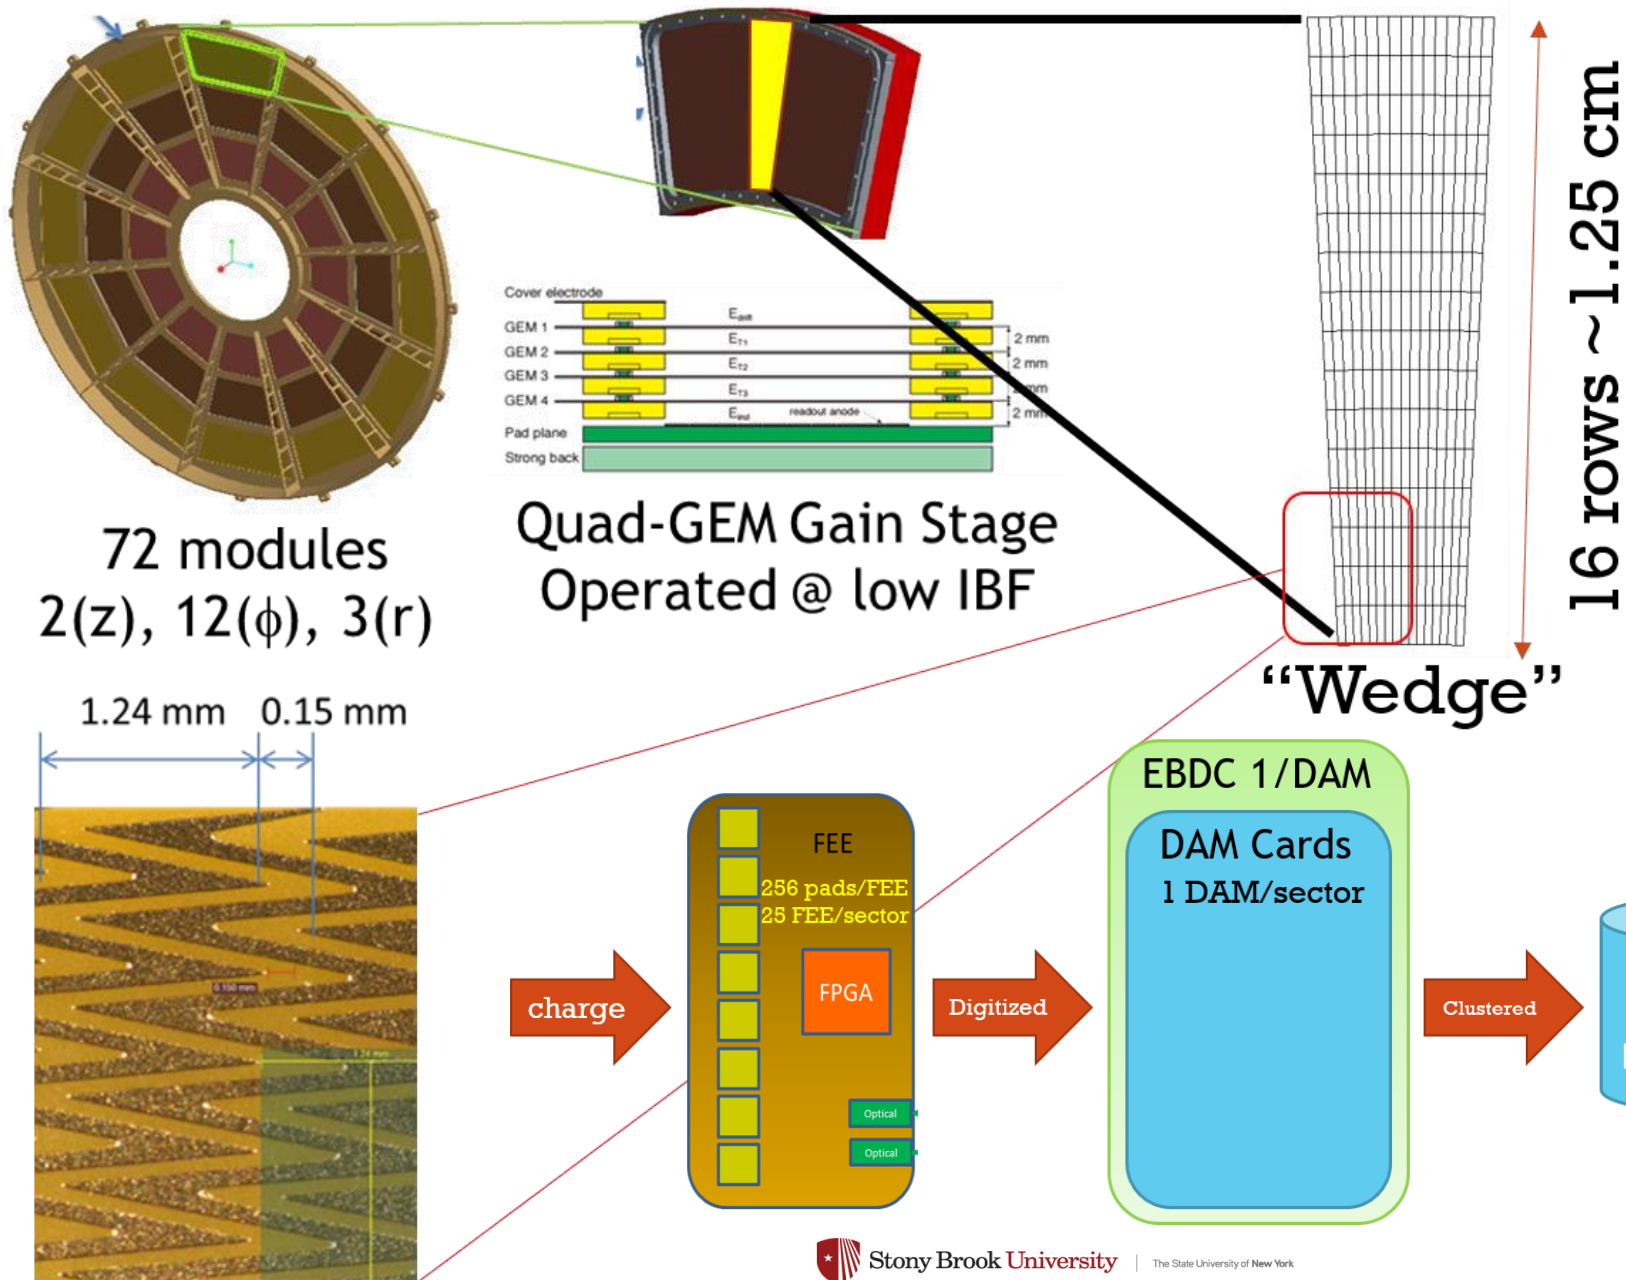


Item	Count
Field Cage	1
Modules	72+extra
FEE	624+extra
DAM	24+extra
EDBC	24+extra

## SAMPA progress (FE)

- SAMPA v5 components were produced in a multi-project wafer (MPW) run
- Initial test shows a good linearity for 80nsec shaping and 30mV/fC gain.
  - Power consumption: 6mW/ch
  - Noise:  $\sim 500e$  @  $C_{in}=0$ ,  $\sim 600e$  @  $C_{in}=20pF$

- 1, CSA+Shaping only
- 2, ADC only
- 3, Inclusive chain (FE+ADC)

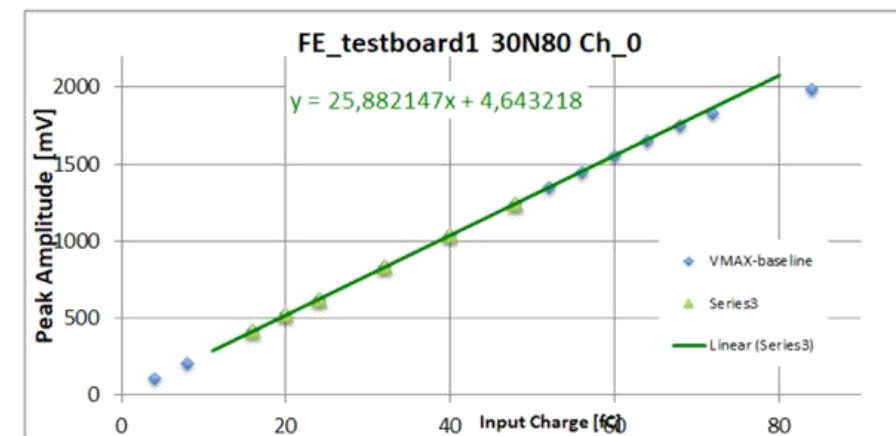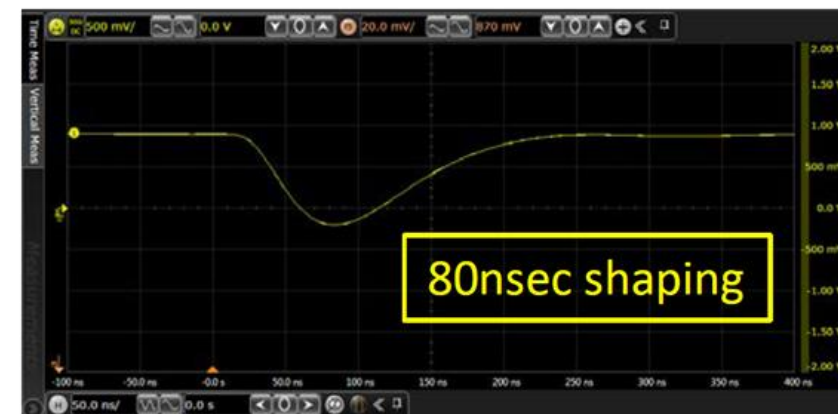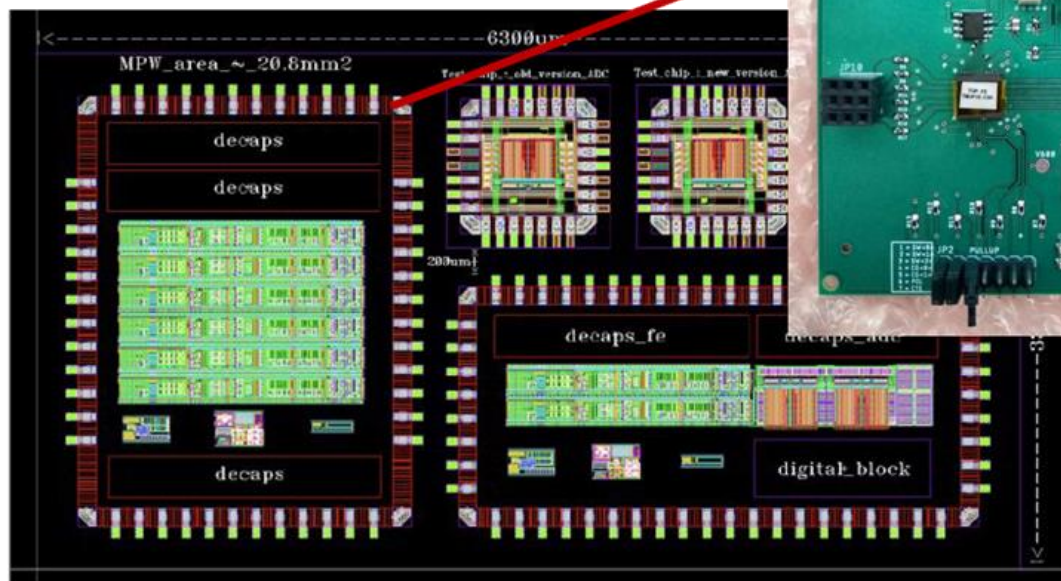



# sPHENIX TIME PROJECTION CHAMBER

14

ALICE Quadruple GEM schematics



sPHENIX Quadruple GEM schematics




# sPHENIX TIME PROJECTION CHAMBER

14

ALICE Quadruple GEM schematics



sPHENIX Quadruple GEM schematics

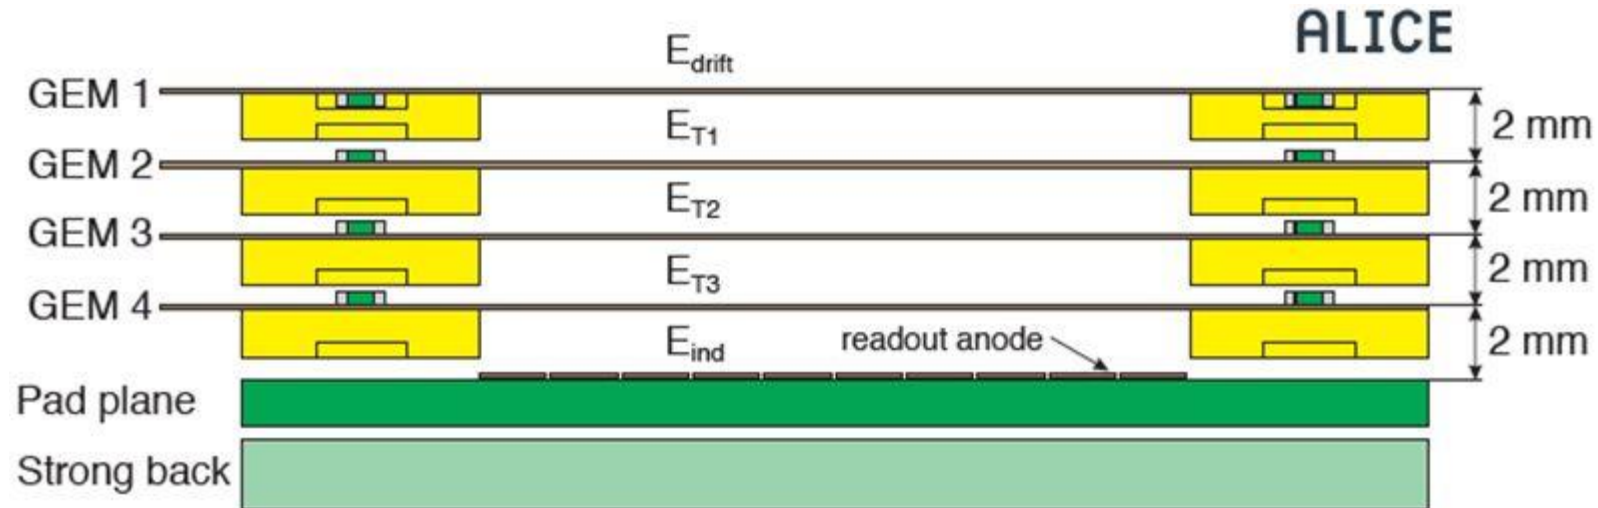


# sPHENIX TIME PROJECTION CHAMBER

14

ALICE Quadruple GEM schematics



sPHENIX Quadruple GEM schematics

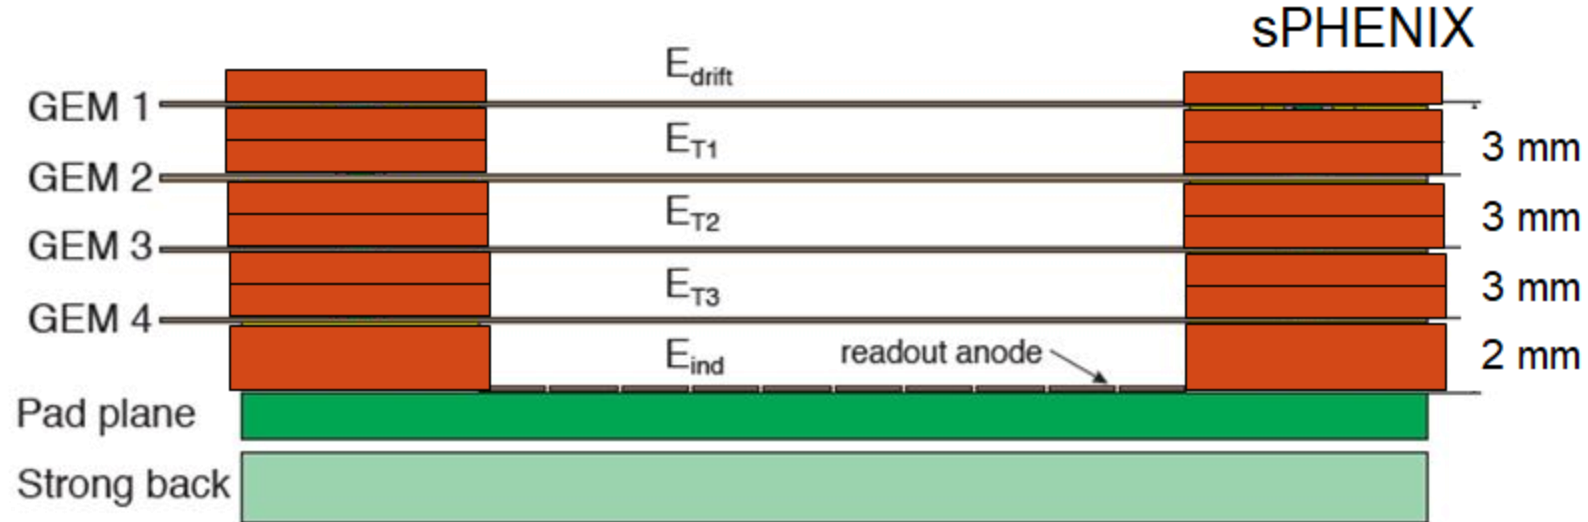



# sPHENIX TIME PROJECTION CHAMBER


14

Standard pitch  
not rotated

Large pitch  
rotated

Large pitch  
not rotated

Standard pitch  
rotated

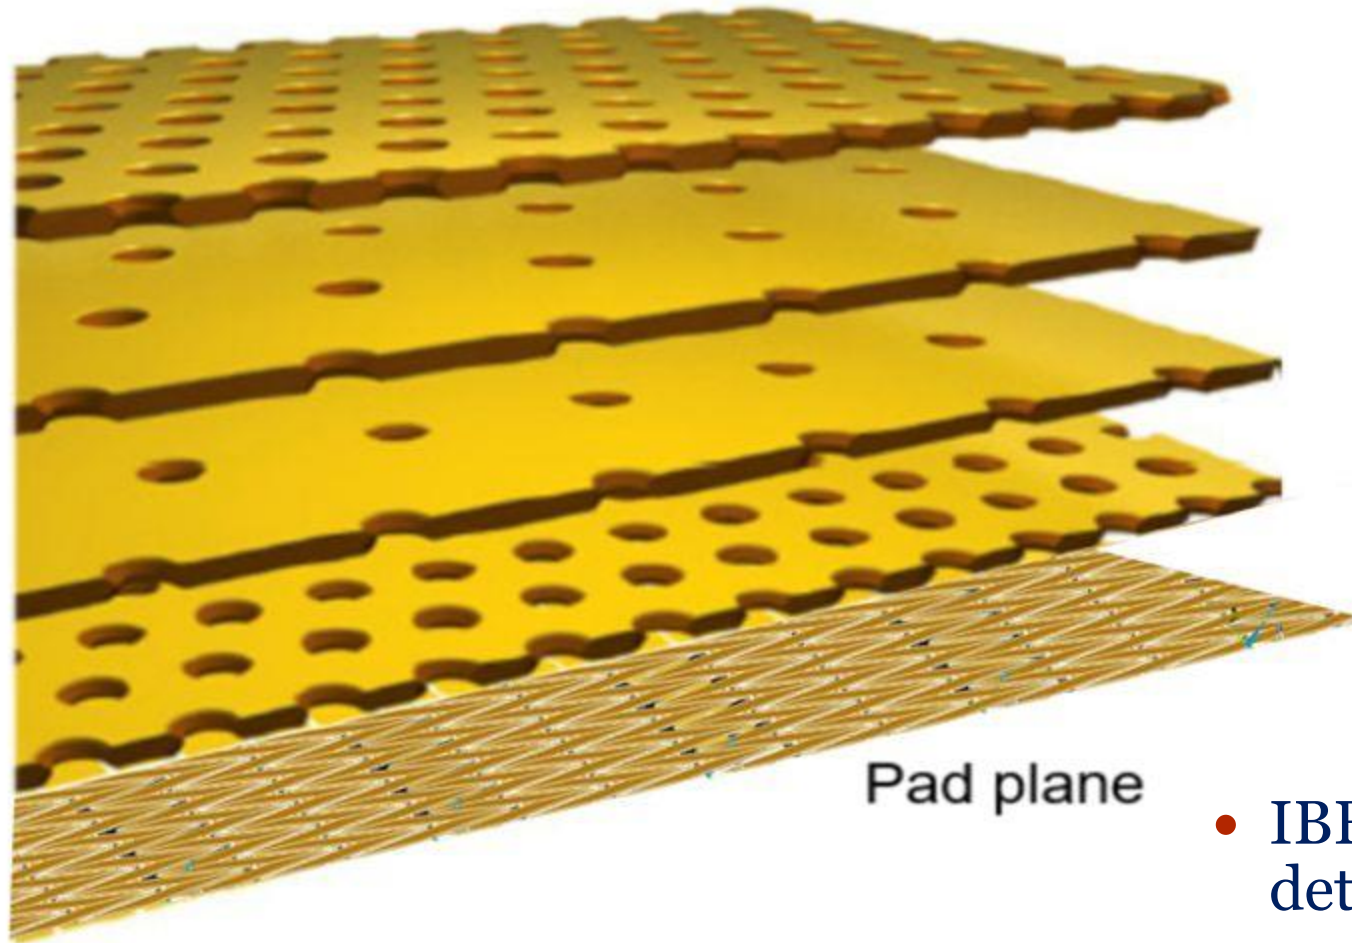


V	sPHENIX			
Setting	1	2	3	4
G1 Top	4208	4658	5124	5118
G1 Bot	3951	4401	4851	4861
G2 Top	3051	3351	3651	3661
G2 Bot	2721	3021	3321	3342
G3 Top	1821	1971	2121	2142
G3 Bot	1409	1559	1709	1709
G4 Top	1379	1529	1679	1679
G4 Bot	900	1050	1200	1200

- IBF for these configurations determined with X-ray
  - ✦ **0.44%, 0.39%, 0.33%, 0.31%**
- All configurations tested in test-beam


# sPHENIX TPC: READOUT MODULES

15

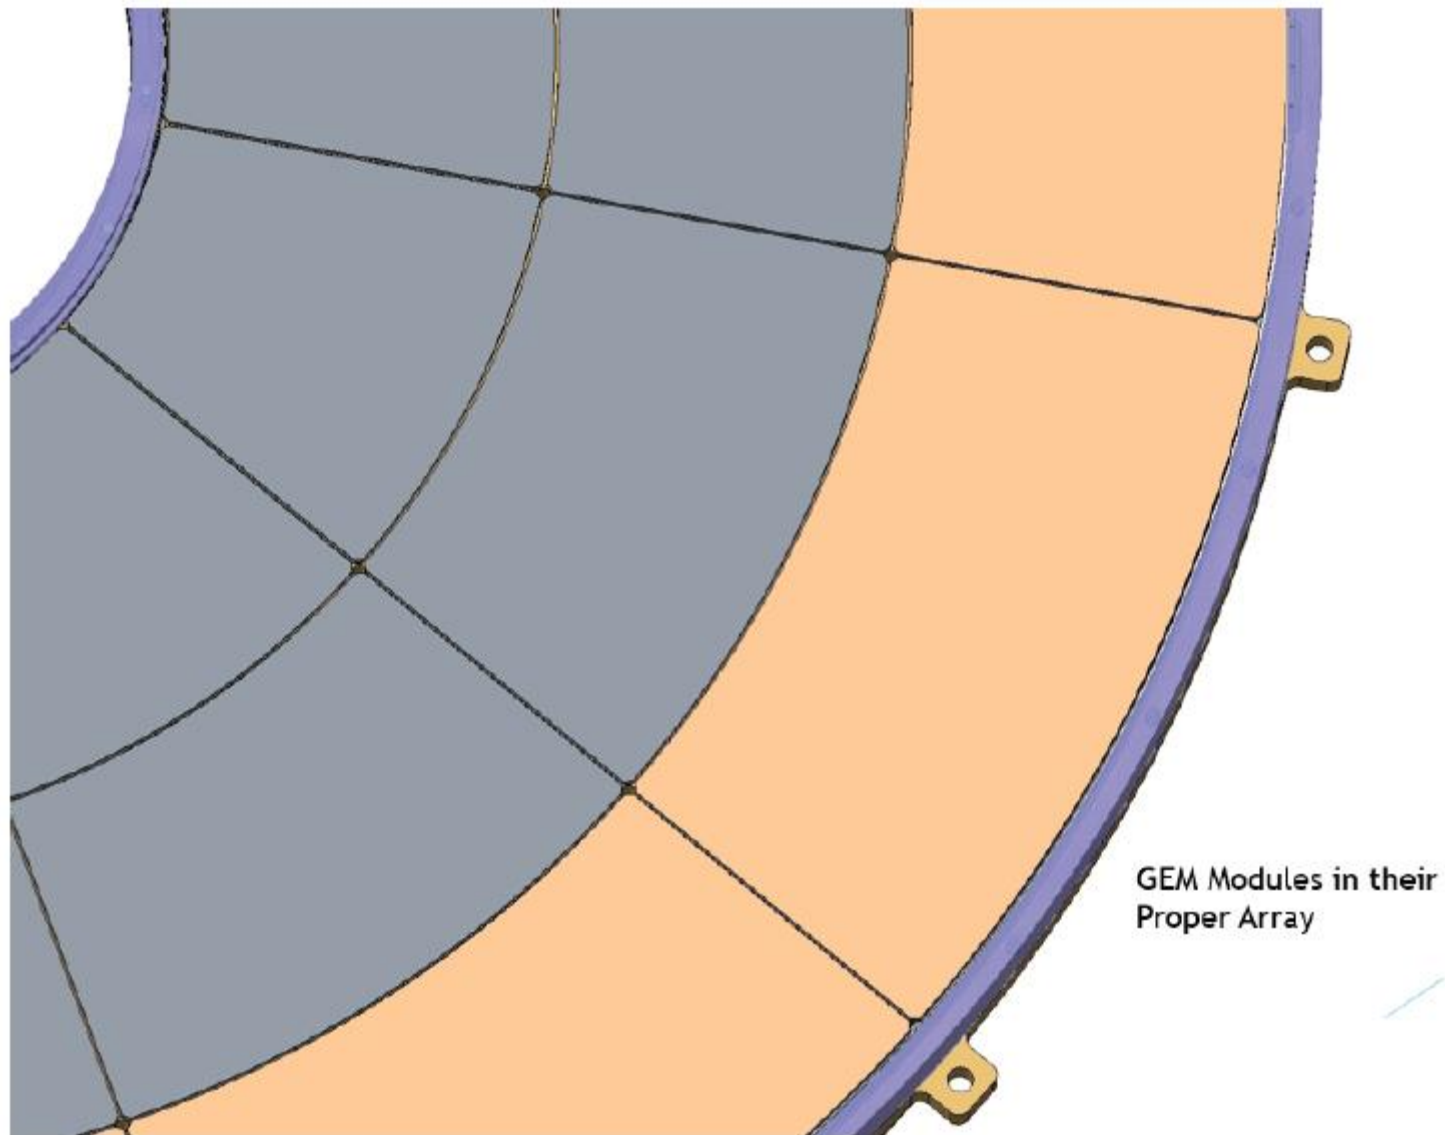

# sPHENIX TPC: READOUT MODULES


15

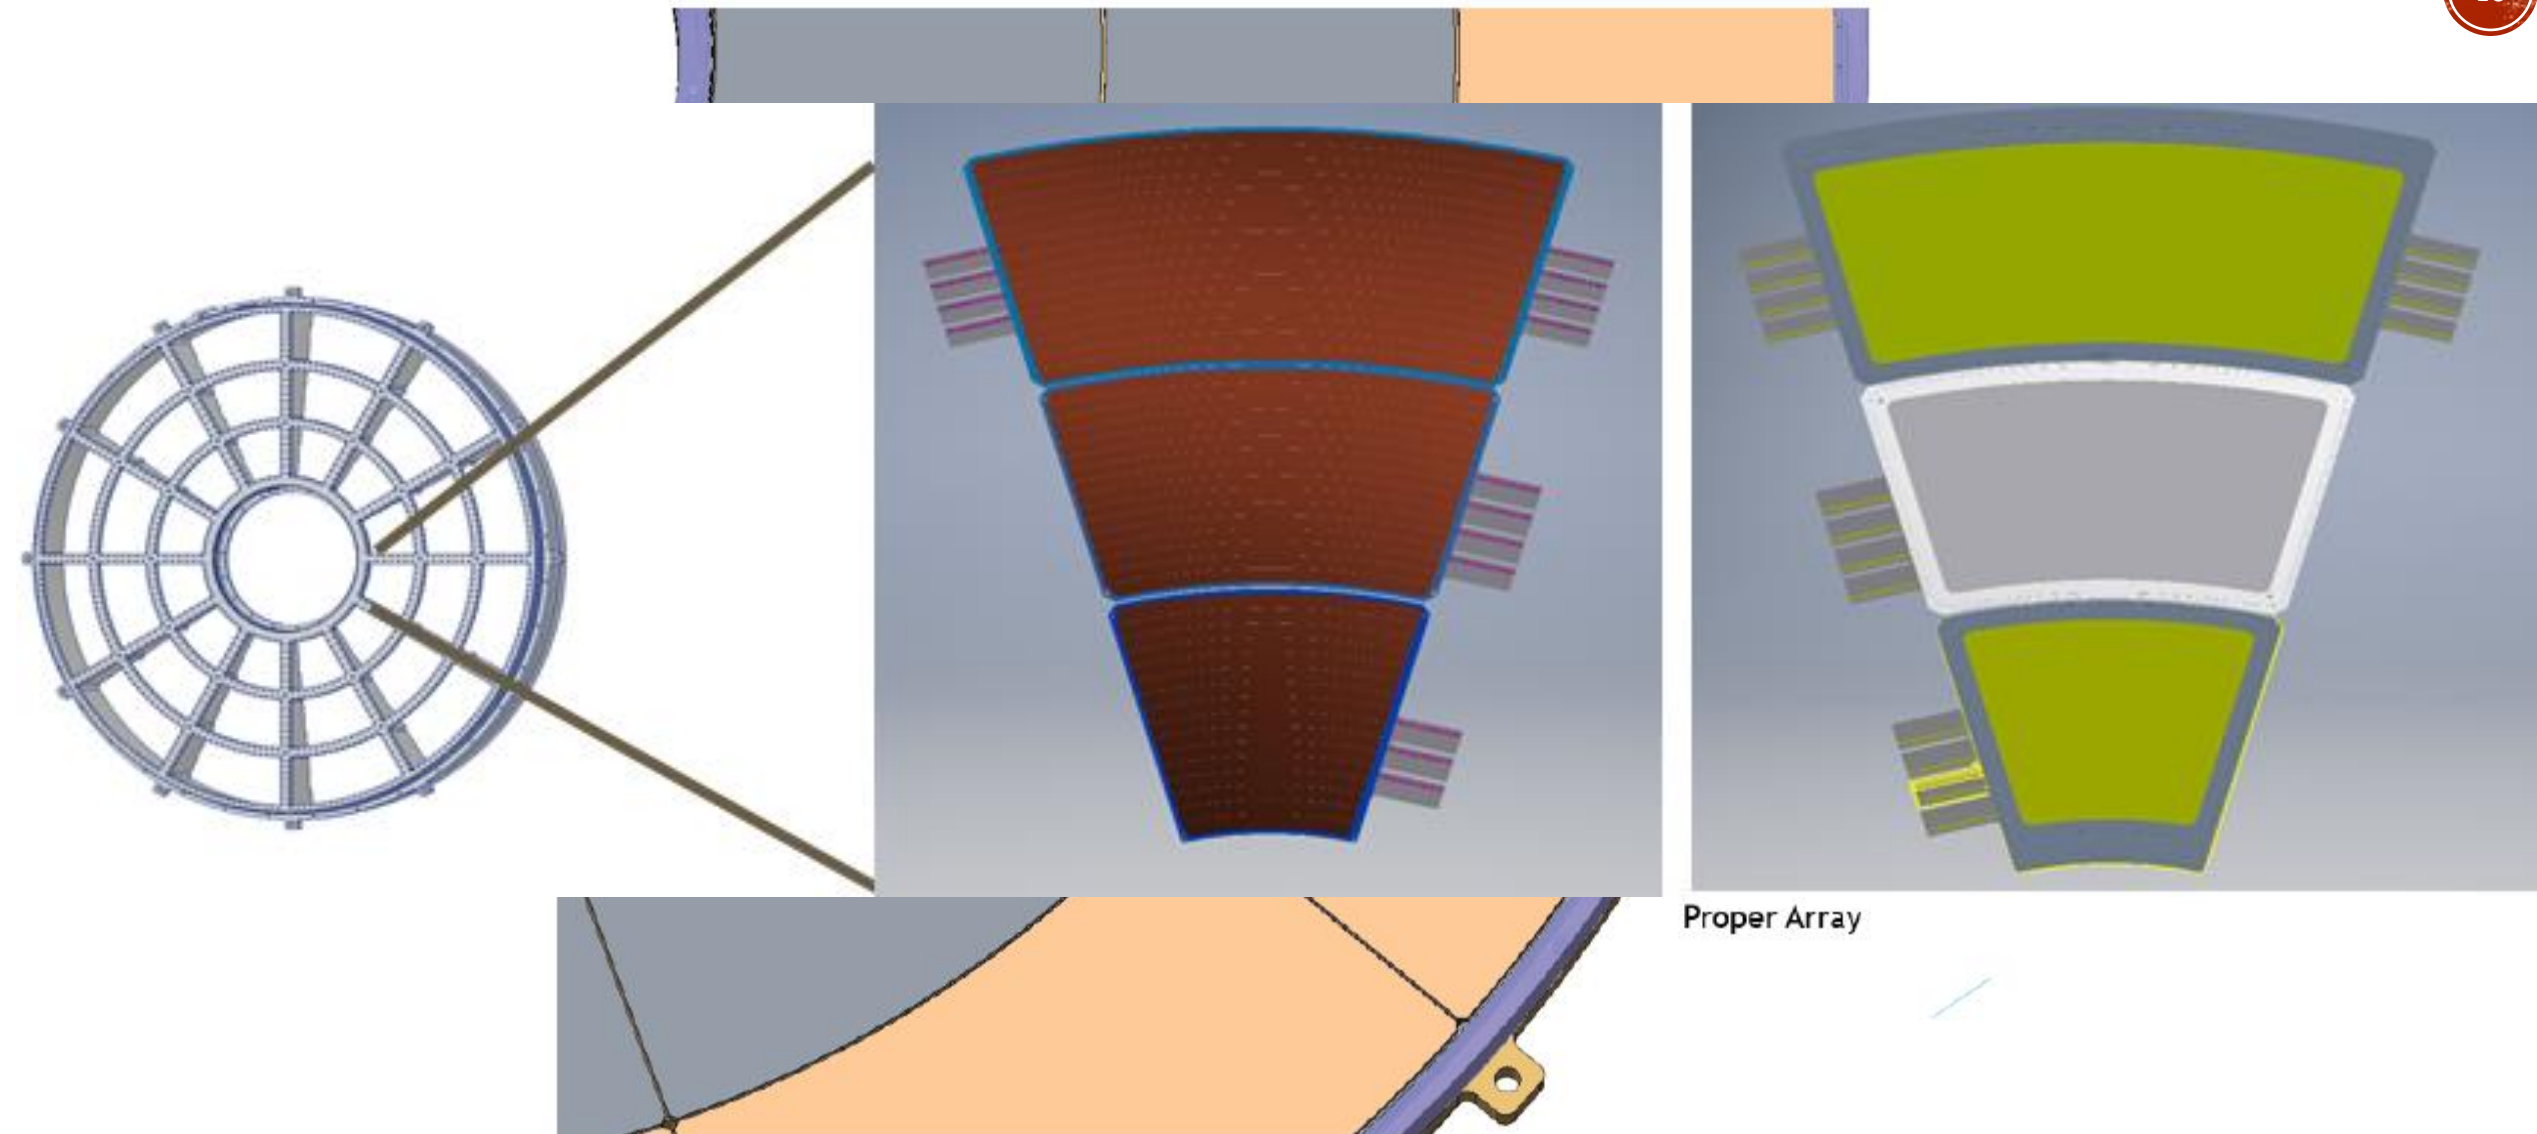




# sPHENIX TPC: READOUT MODULES

15

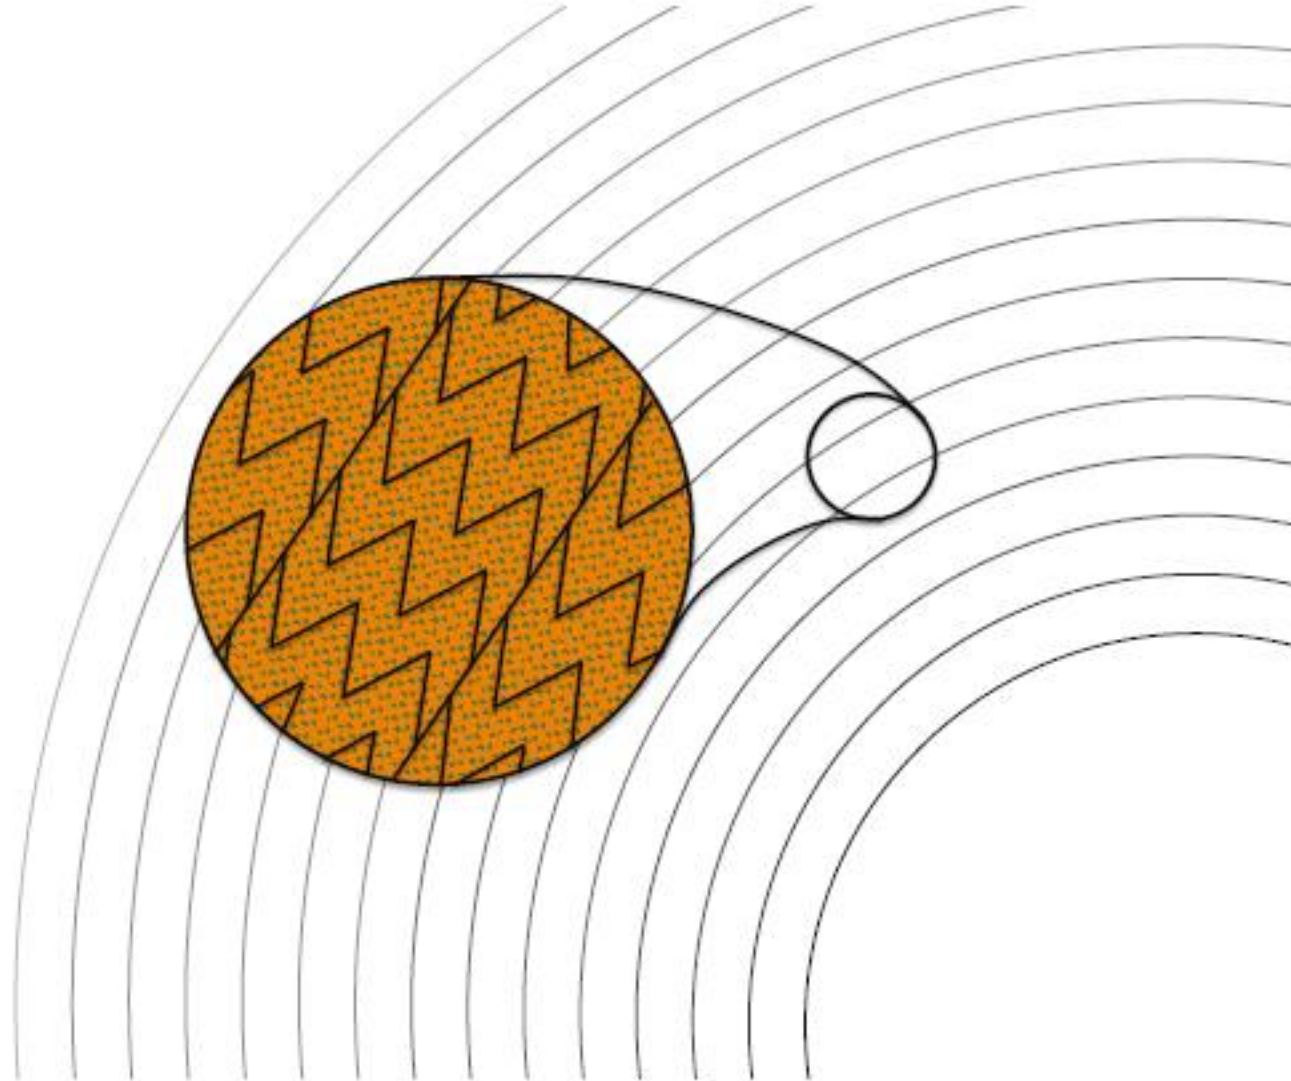


# sPHENIX TPC: READOUT MODULES

15

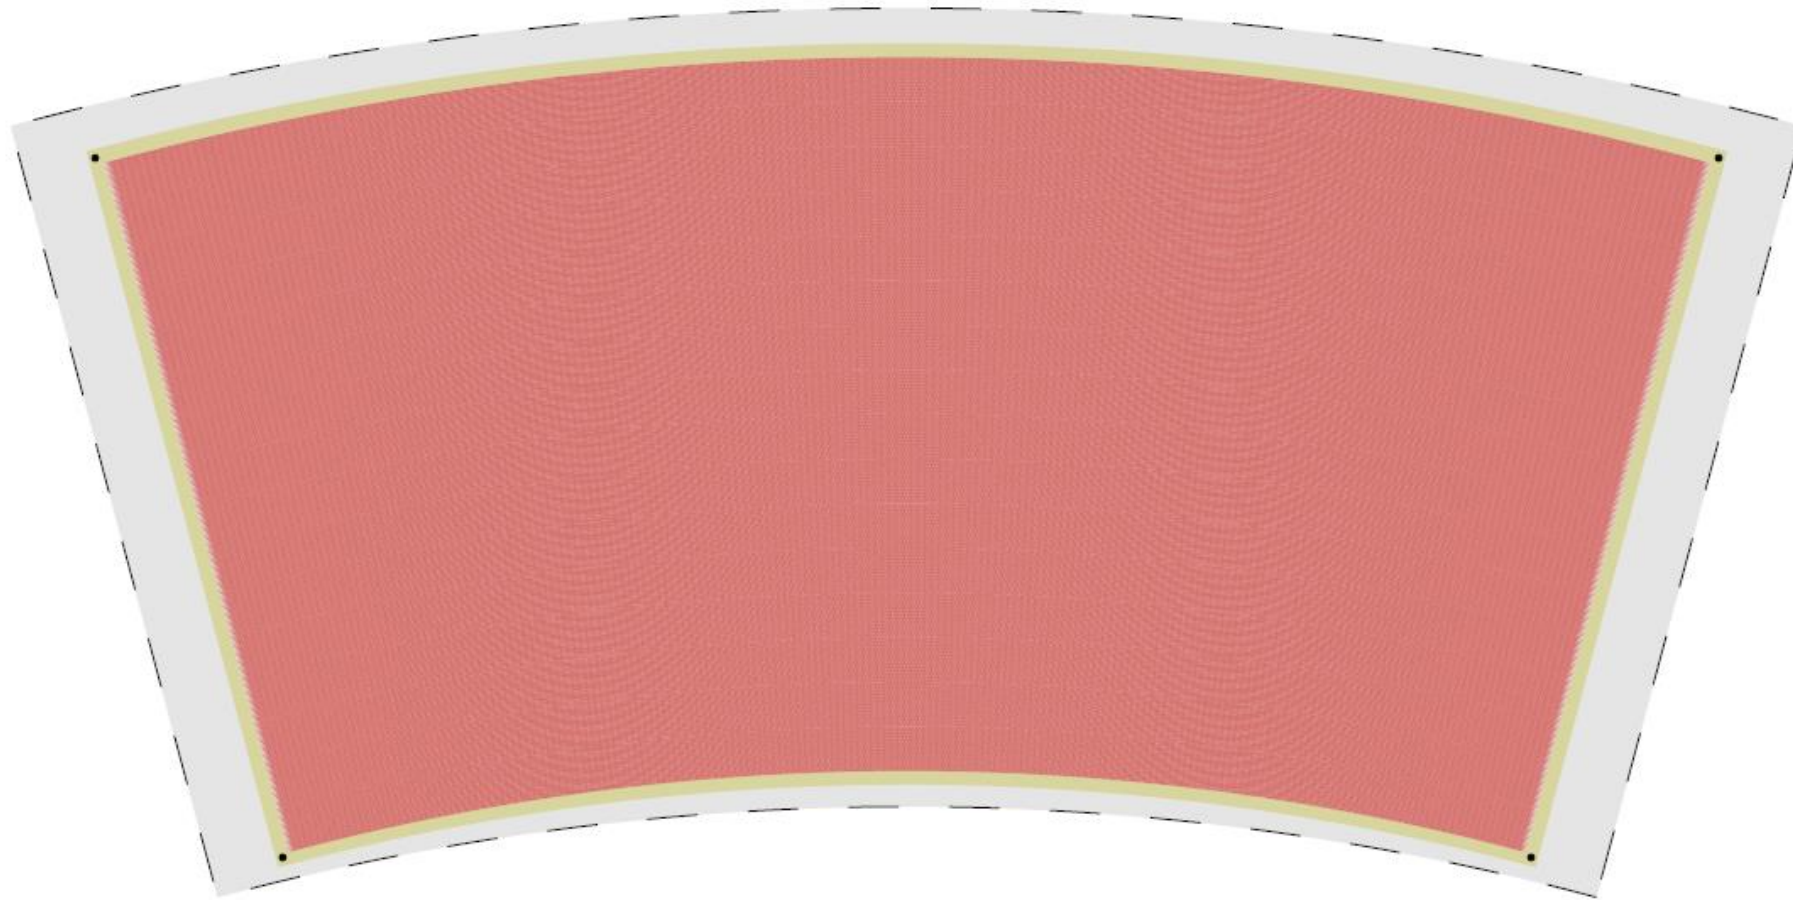



# sPHENIX TPC: READOUT MODULES

15

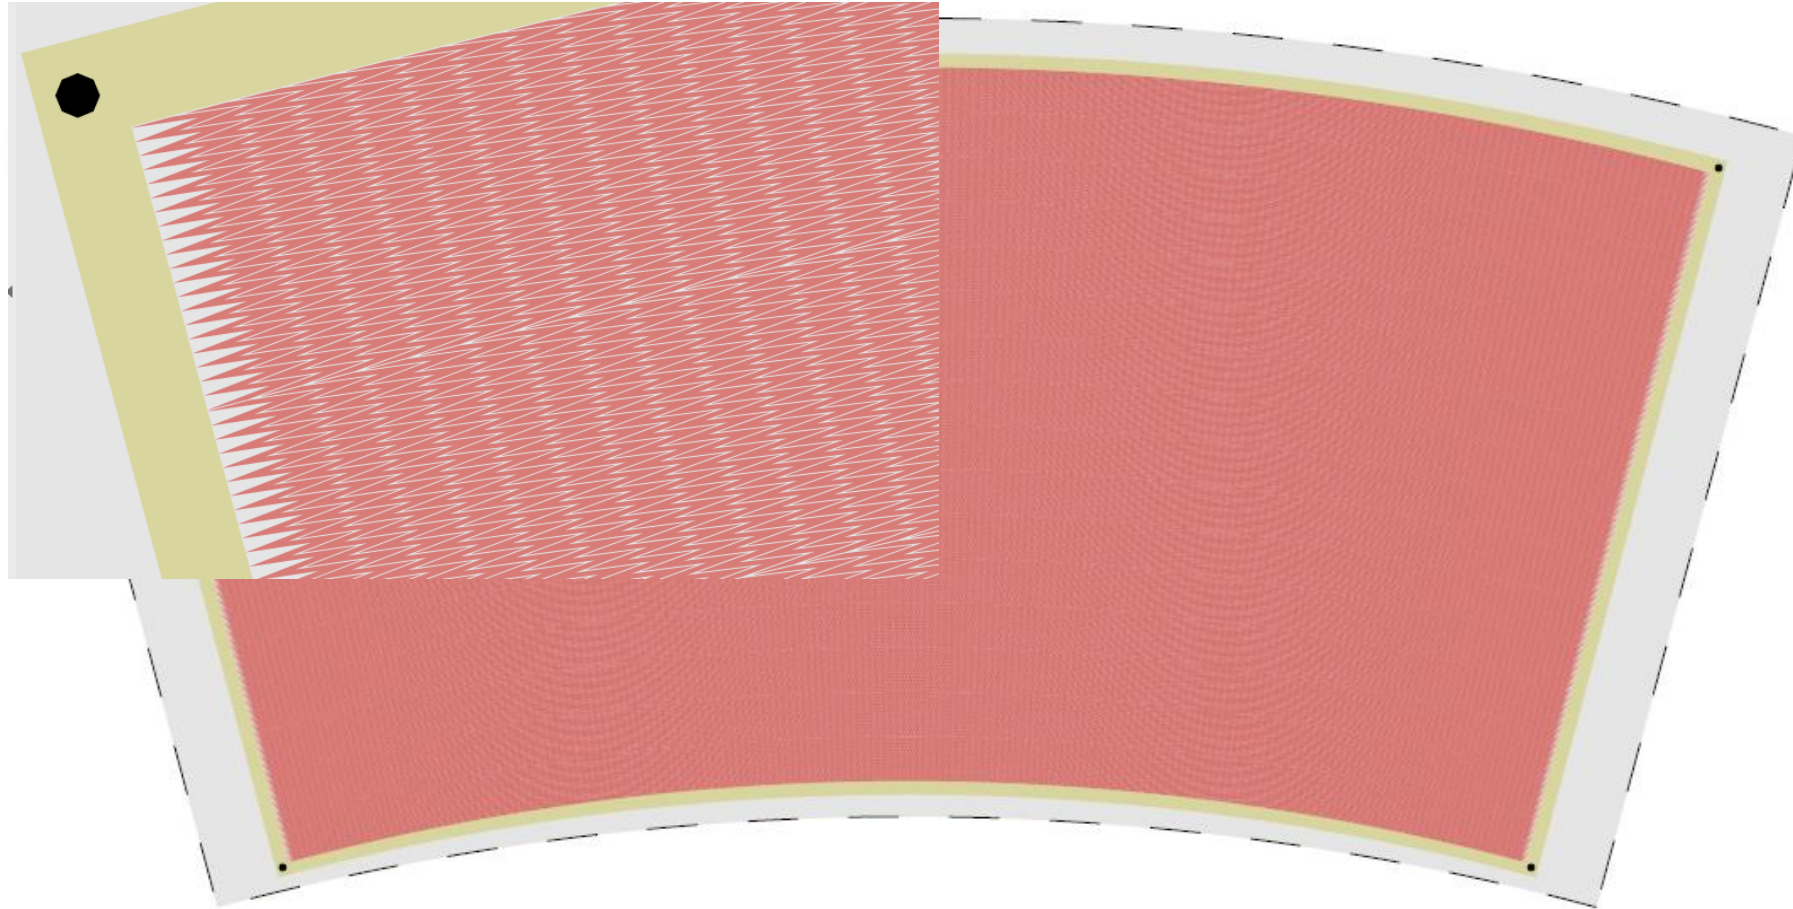



# sPHENIX TPC: READOUT MODULES

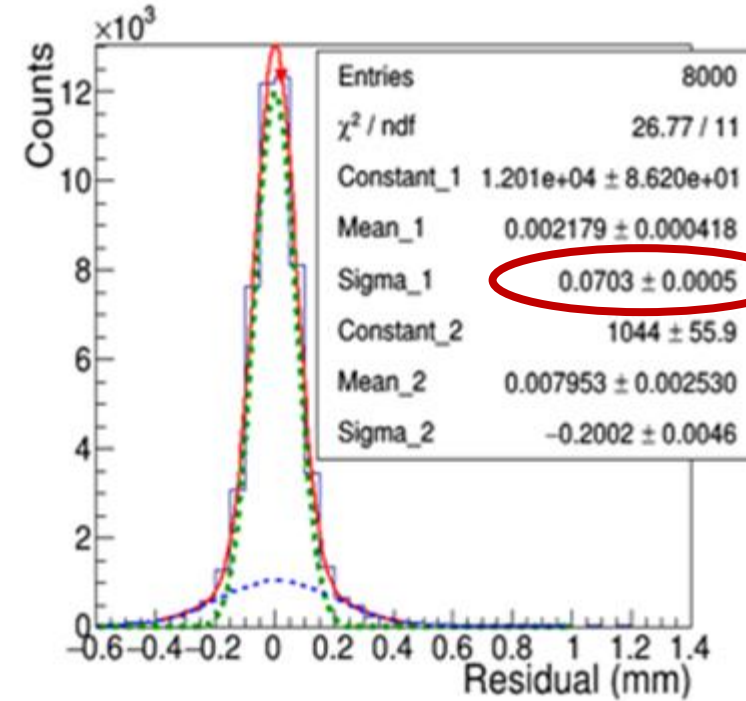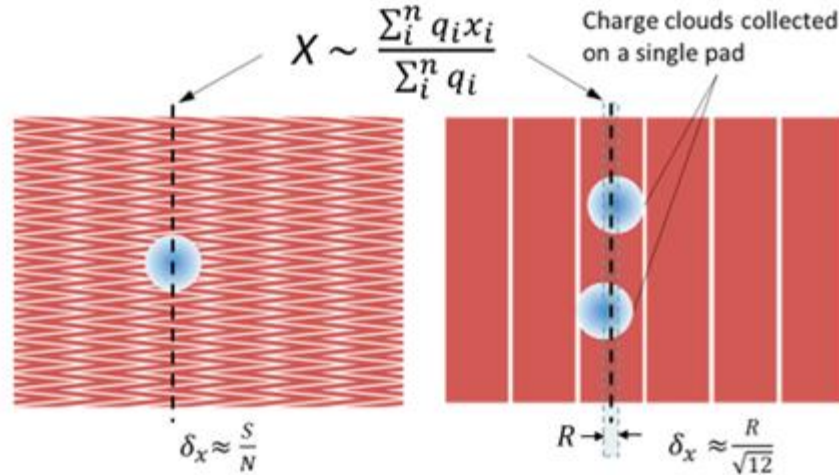


- Low diffusion can cause single pad hits → poor resolution
- Zig-Zags not only minimize single hits, they achieve resolutions to a smaller fraction of pitch than rectangles
- EXTENSIVE studies at BNL lead to several principle conclusions
  - Incursions of nearly 100% are required for good linearity.
  - Tip-to-tip pitch must be controlled relative to avalanche spread.
  - Best linearity when gaps are VERY small (<100 μm).

- Incursion: percentage of pad spacing by which one ZZ penetrates its neighbor
- 100% incursion means neighbors tip penetrates to nominal pad center

# sPHENIX TPC QUAD-GEM MODULE

17

- Test beam @ Fermilab

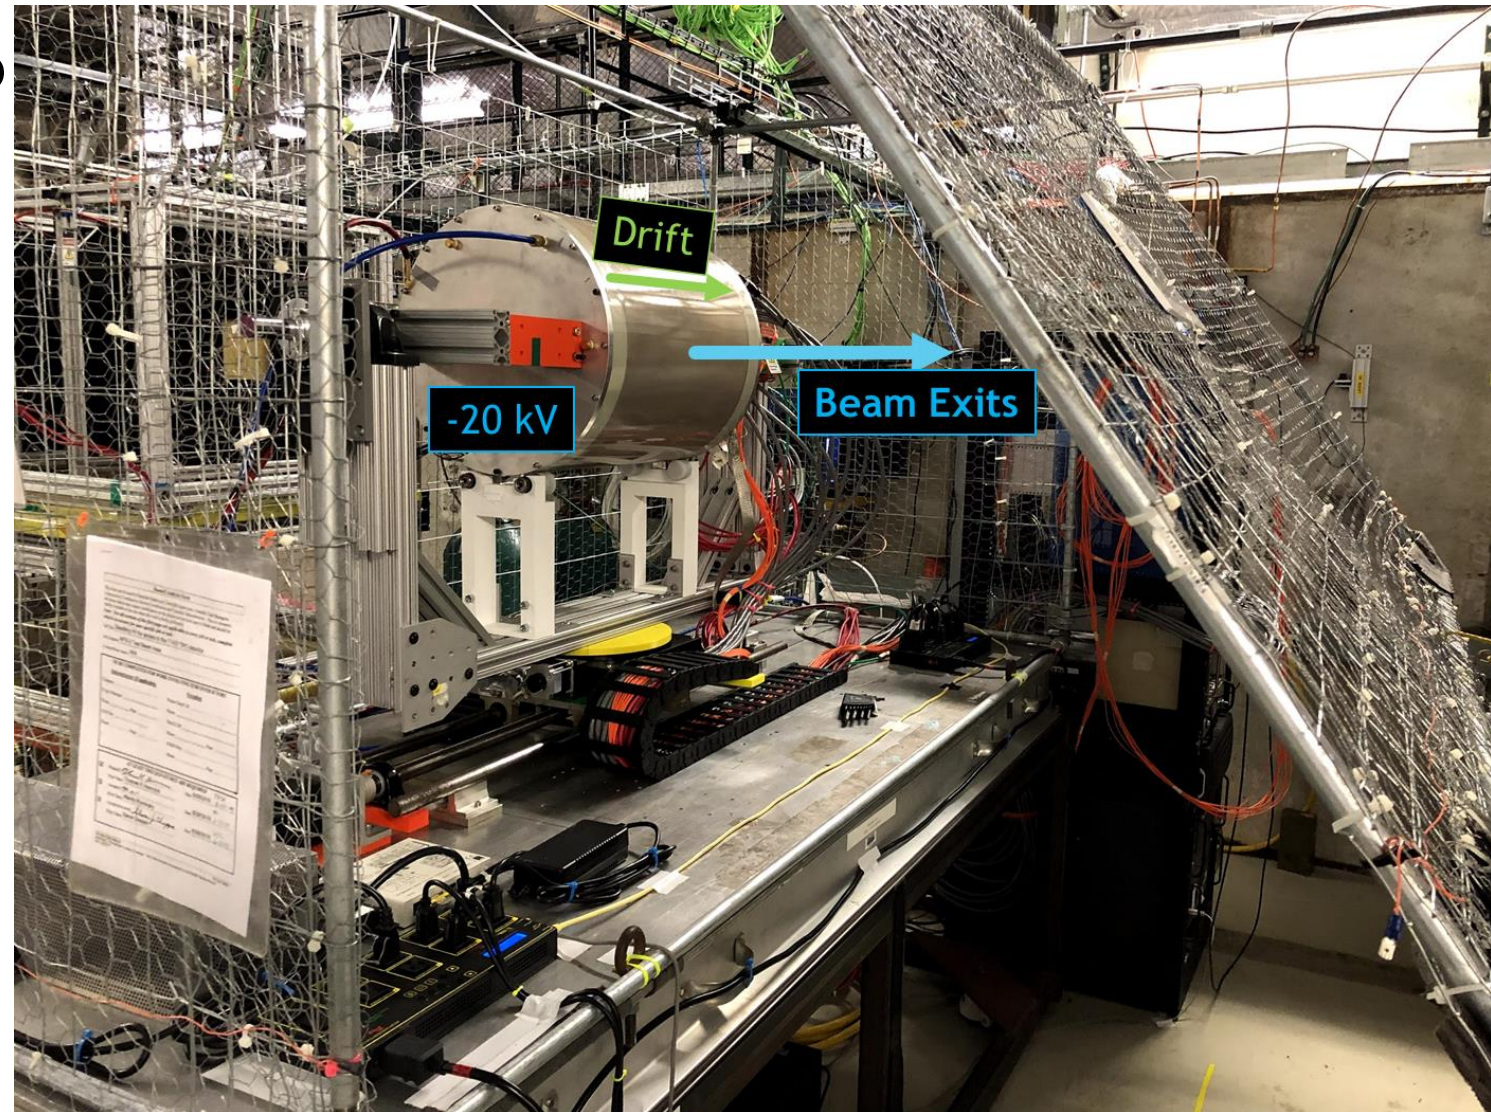







# sPHENIX TPC QUAD-GEM MODULE

17

- Test beam @ Fermilab

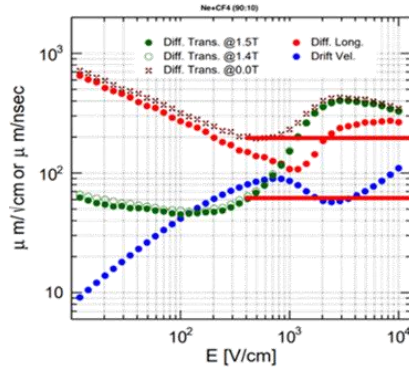

$$\sigma_{TOT}^2 = \underbrace{\sigma_{pad}^2}_{\text{PadPlane}} + \underbrace{\frac{D_T^2 L}{N_{eff}}}_{\text{Drift}} + \underbrace{\sigma_{SC}^2}_{\text{Space Charge}}$$

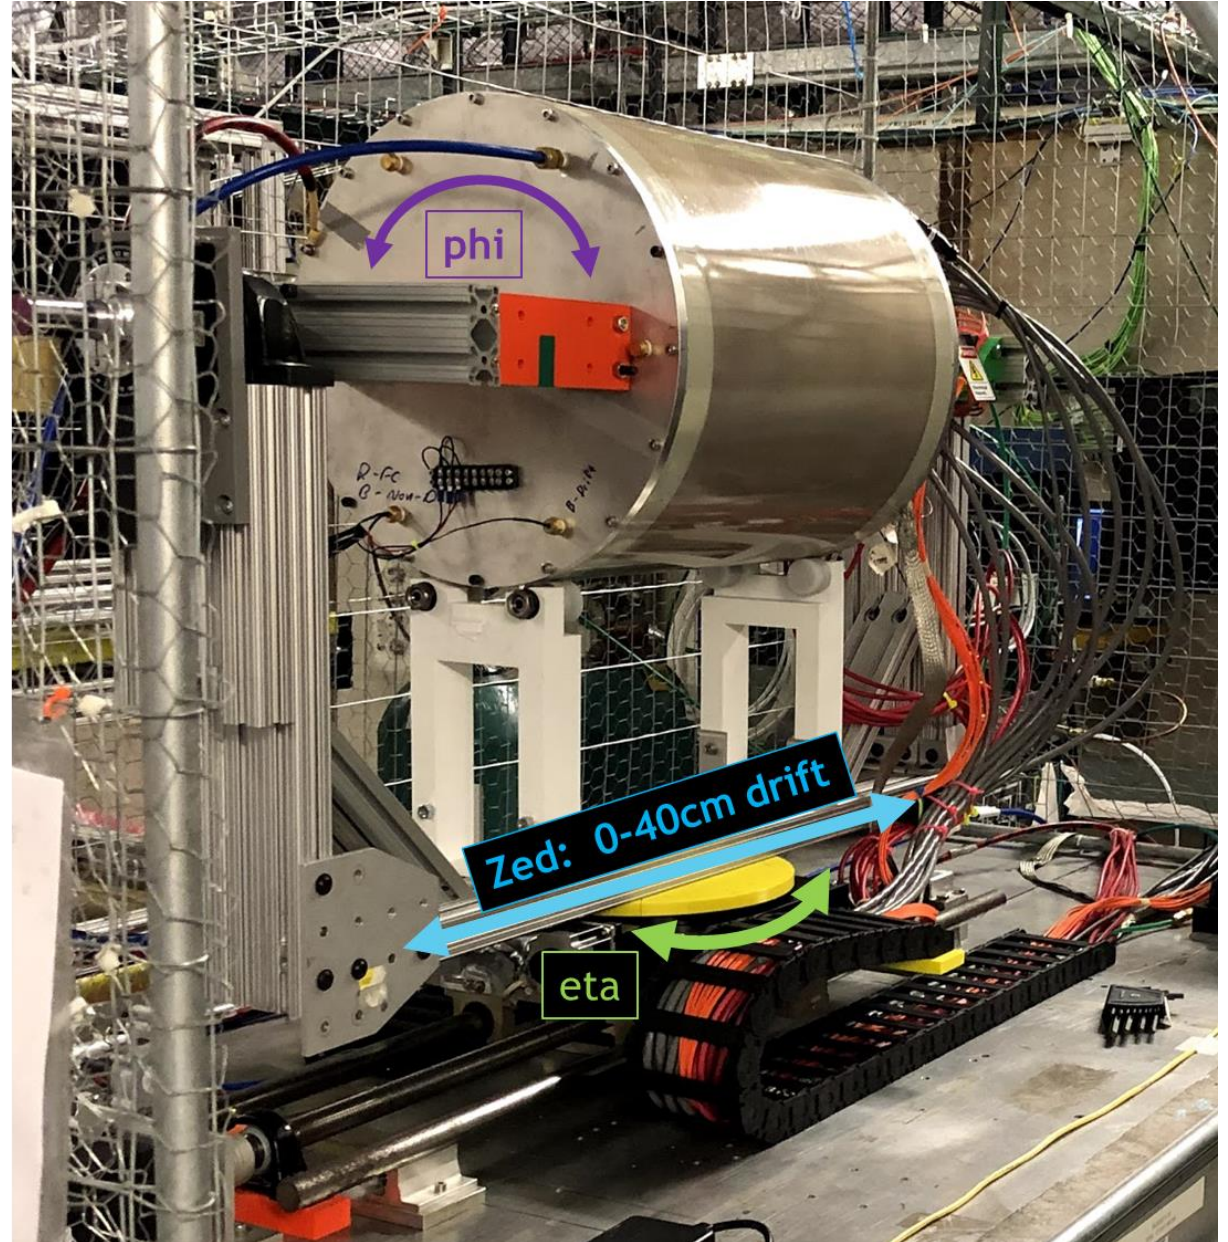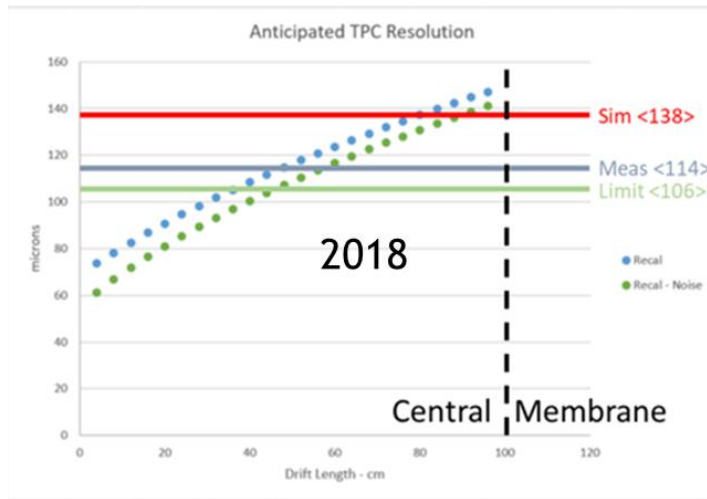




# sPHENIX TPC QUAD-GEM MODULE

17


- Test beam @ Fermilab

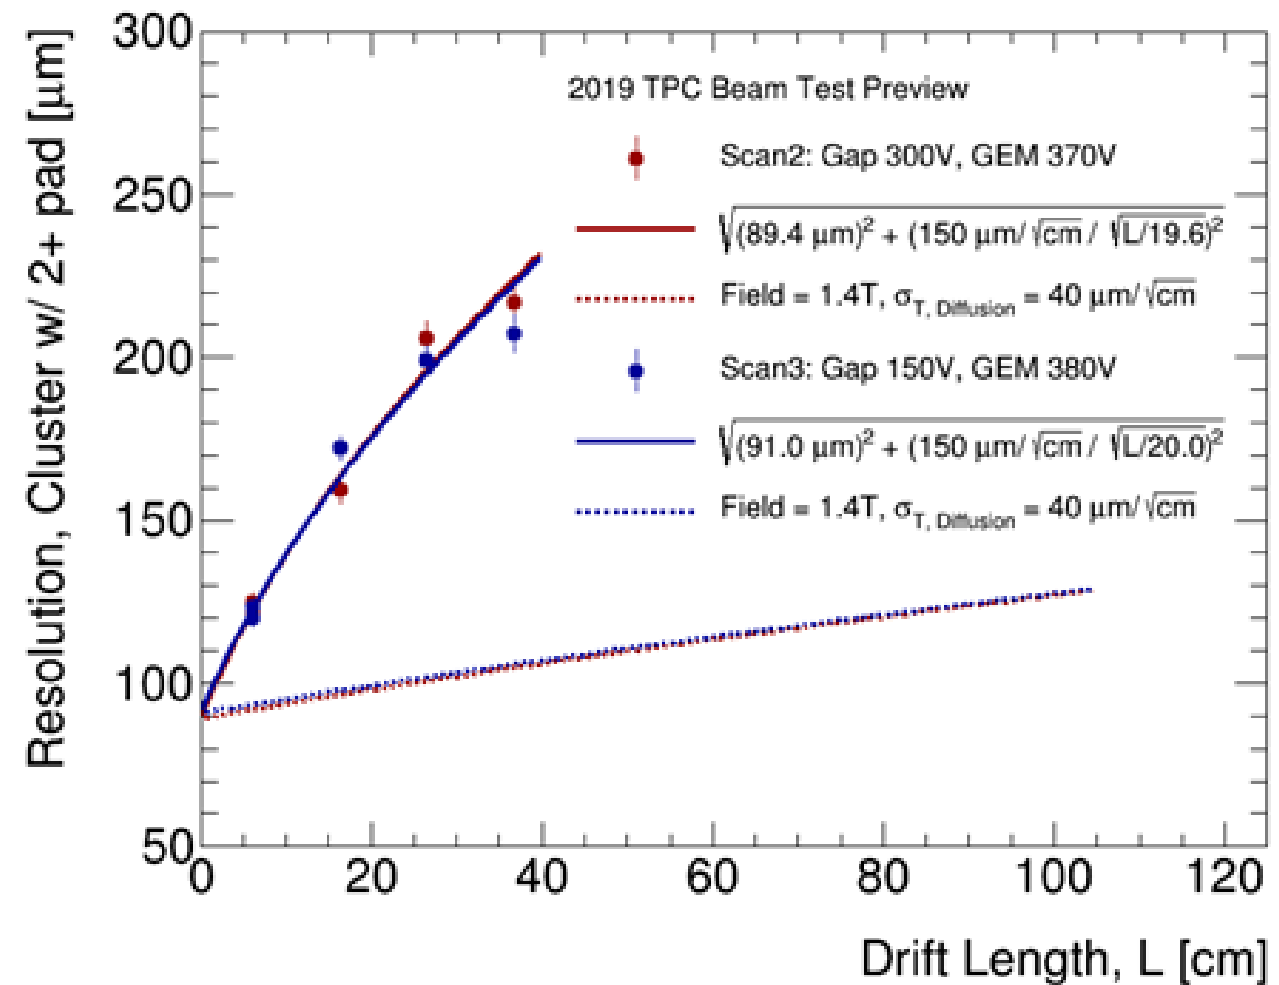

# sPHENIX TPC QUAD-GEM MODULE

17

- Test beam @ Fermilab

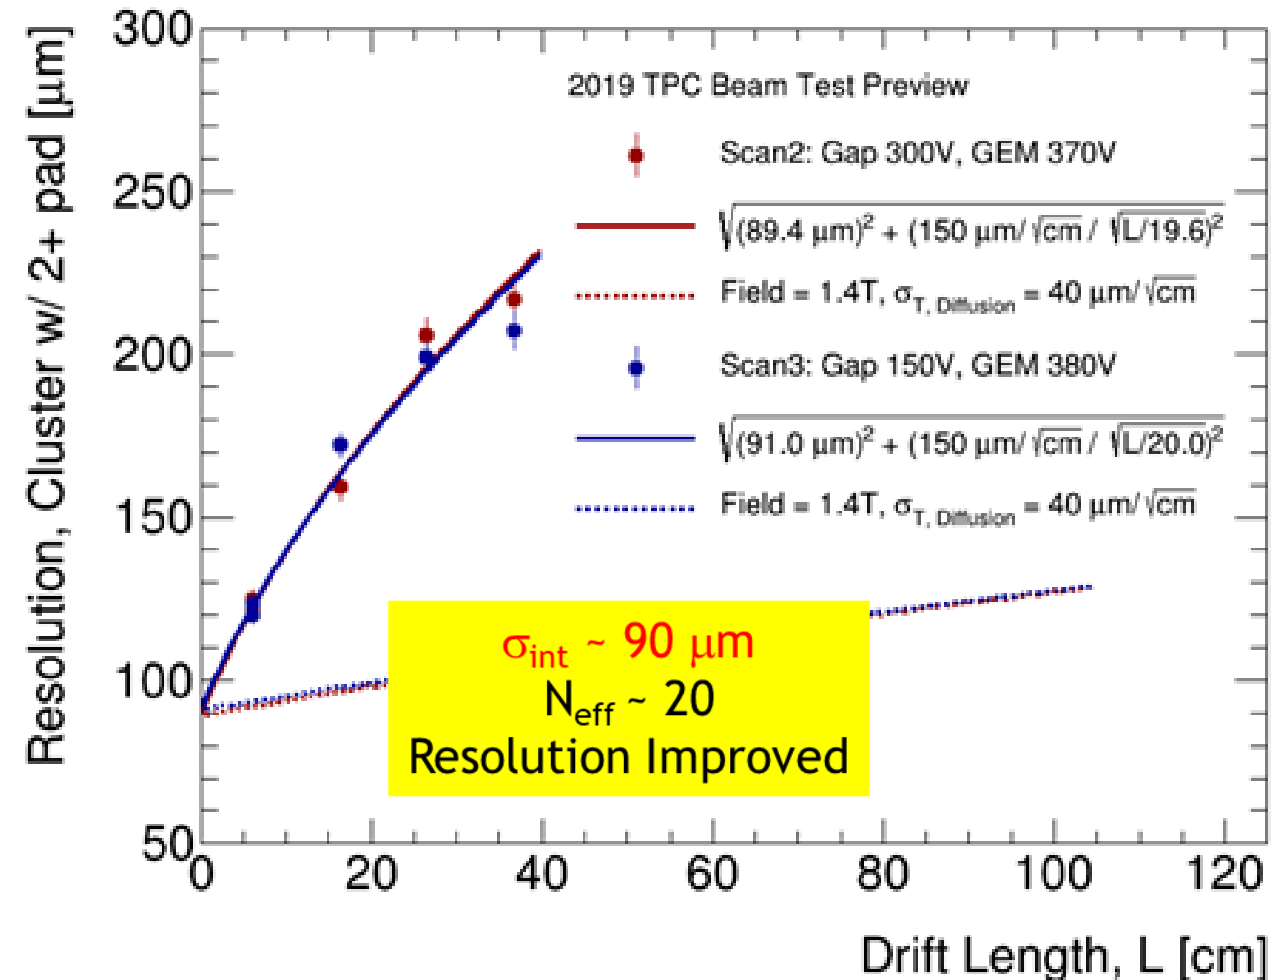

# CONCLUSION (SO FAR)

18





- TPC for Heavy Ion experiments well in business
- Heavily relied on ALICE TPC R&D and advice
- Primary goal sPHENIX TPC
  - provide momentum measurement
  - no dE/dx program
  - combat ion backflow
- MPGDs are solution
- Room for further improvement
- TPC for sPHENIX → compatible with TPC-requirements @ EIC
  - @ EIC: most likely less IBF problem
  - sPHENIX TPC designed with eye on EIC
  - Equip idle readout region
  - Change gas choice
  - Alternative MPGD solution
- Please visit: <http://skipper.physics.sunysb.edu/~prakhar/tpc/> → Extensive set of simulations



MORE

- Several ways to combat Space Charge
  1. Make the ions fast through mass
  2. Choose the largest drift field possible
  3. Optimize amplification device's operating point
  4. Update design of field cage informed by current experience
  5. Improve amplification device
    - i. Remove “gain fluctuation” before amplification
    - ii. Increase number of amplification stages
  6. Multi-layer gating grid
  7. Accelerator parameters
  8. Don't let ions be created


- FC design includes a “termination grid” to ensure uniformity of the field in the drift volume
- Multiple simulations:
  - Wire mesh,
  - Photo-etched
  - Square/Round Hole
- Single conclusion:
  - Tune the field ratio surrounding the mesh to block many positive ions

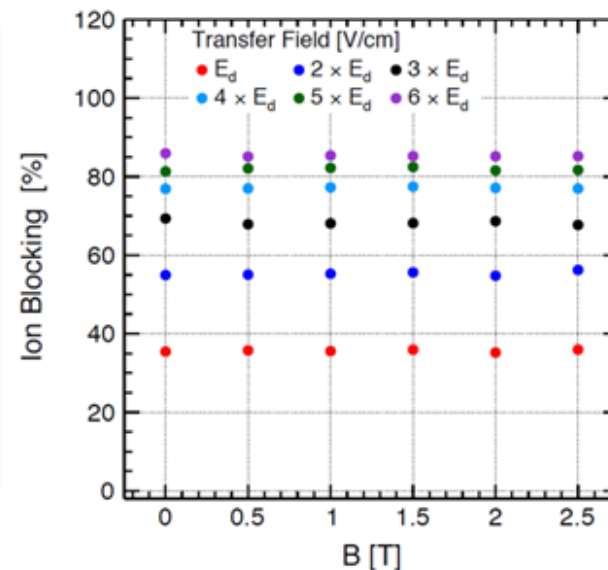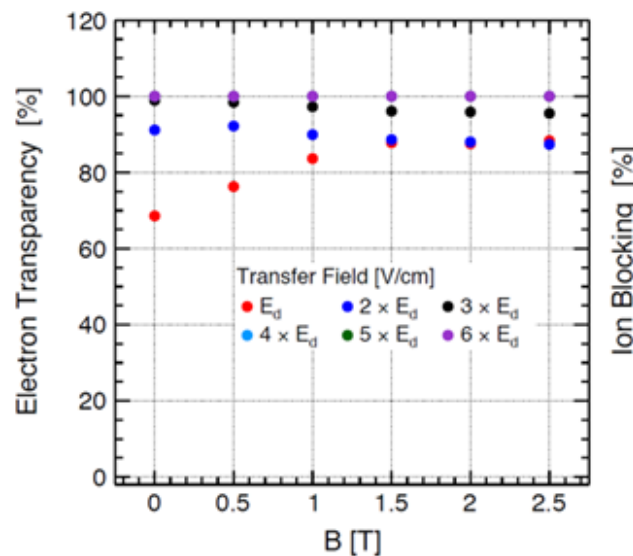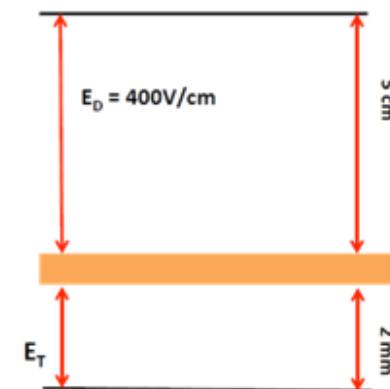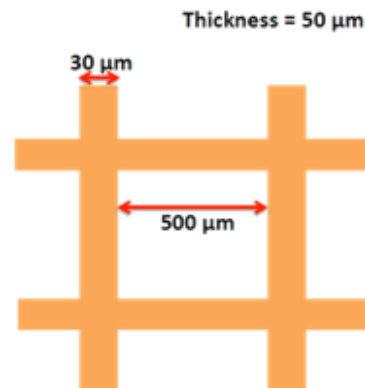



# sPHENIX TIME PROJECTION CHAMBER

22

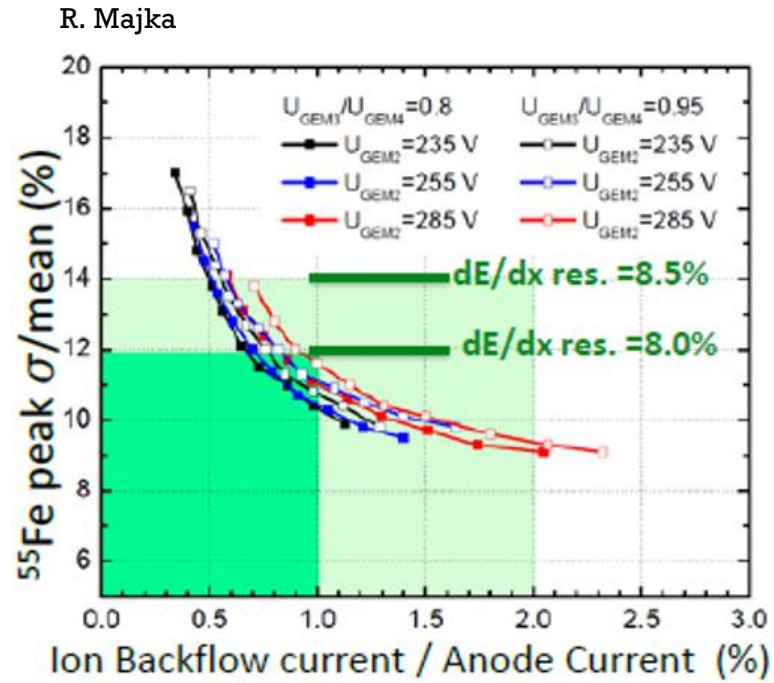


Standard Pitch  
not rotated

Large Pitch  
rotated

Large Pitch  
not rotated

Standard Pitch  
rotated

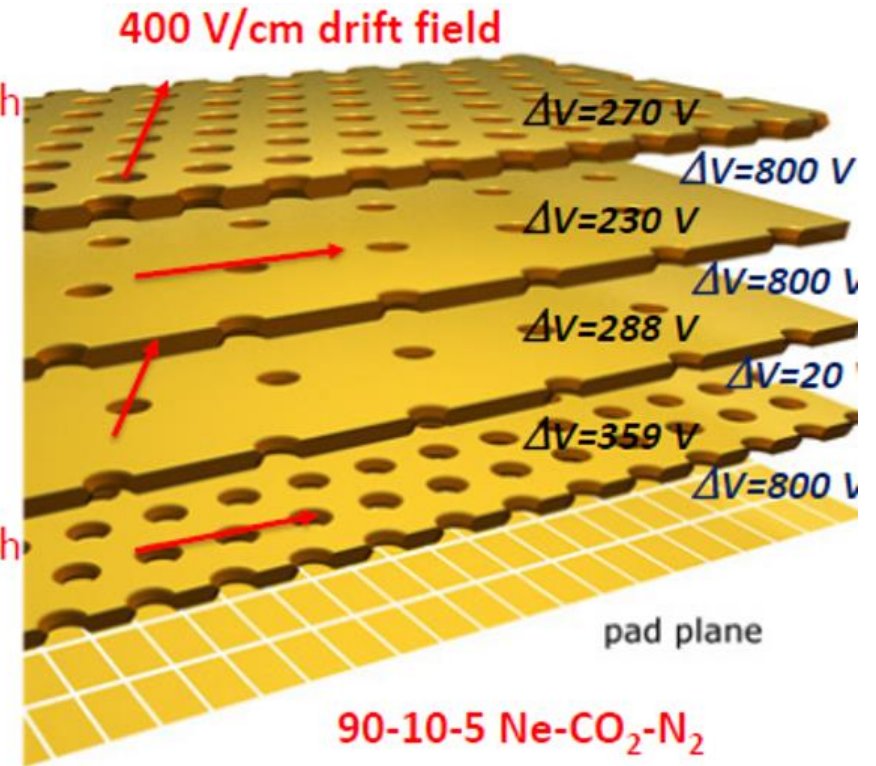



N. Smirnov, R. Majka



# sPHENIX TIME PROJECTION CHAMBER

22

## ■ Dual-GEM + MicroMeGas Solution from Yale

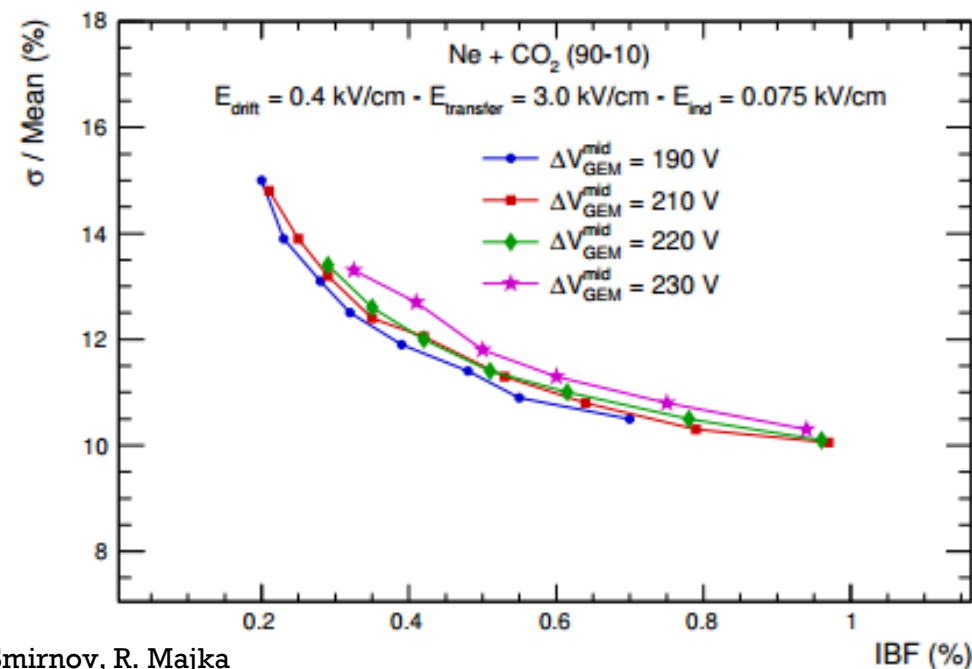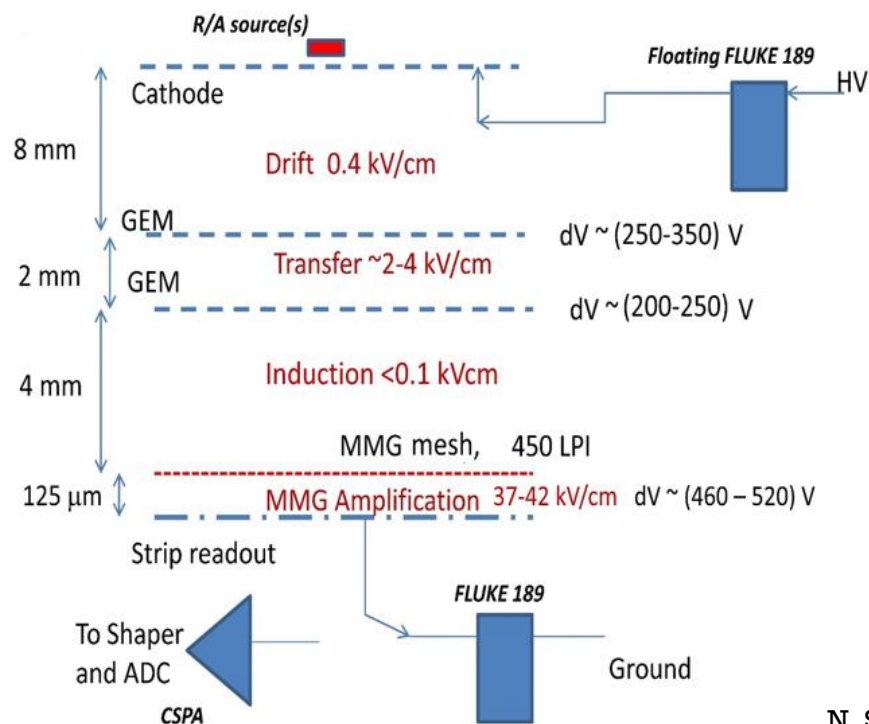


# sPHENIX LASER SYSTEM: TECHNICAL OVERVIEW

23





Layout of TPC End Plates entrance ports  
➤ Two rings of 12 ¼" NPT Feedthrough's

- 266nm light coupled to fused silica fiber with large N.A.

Placed in rack:  
High energy laser  
(60mJ, 4ns) + beam  
splitter



Optical bench

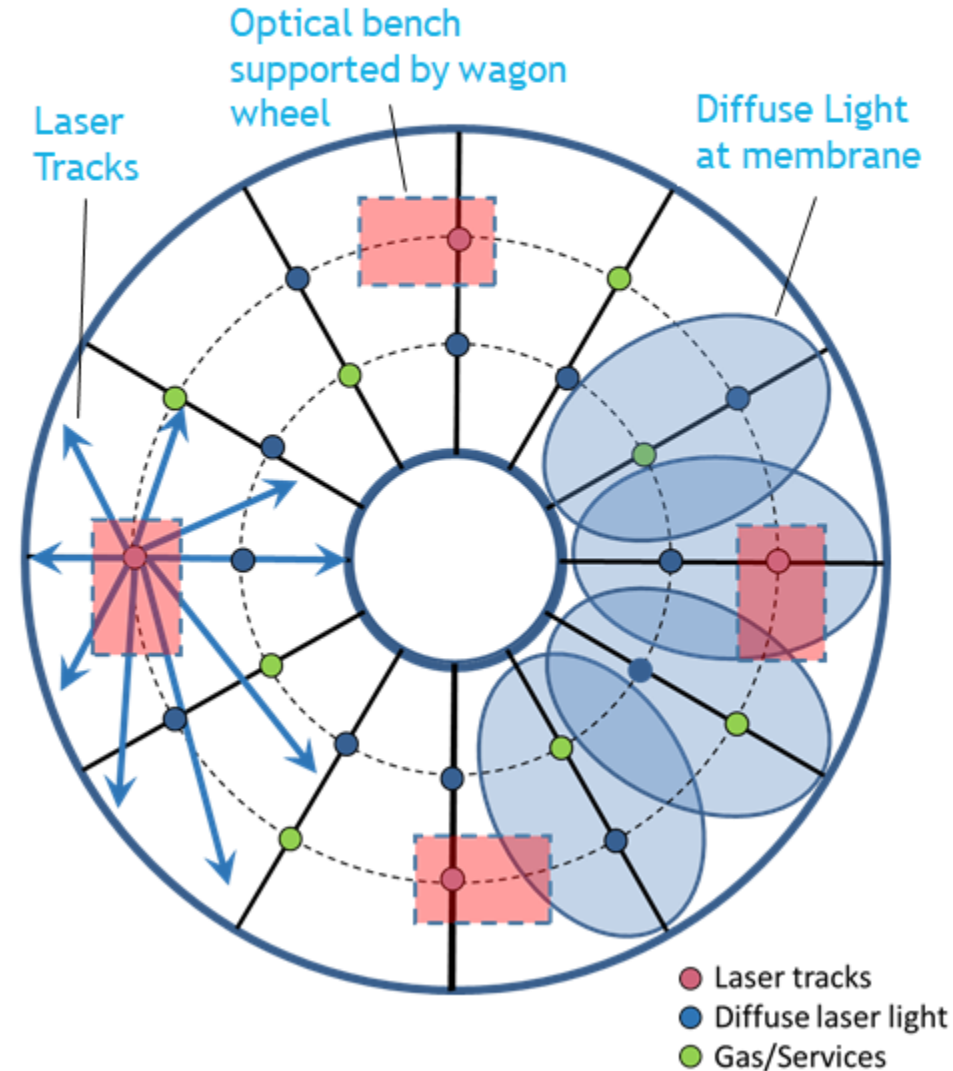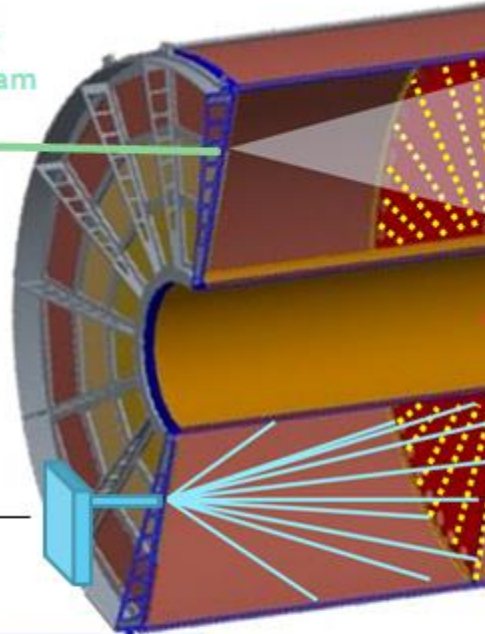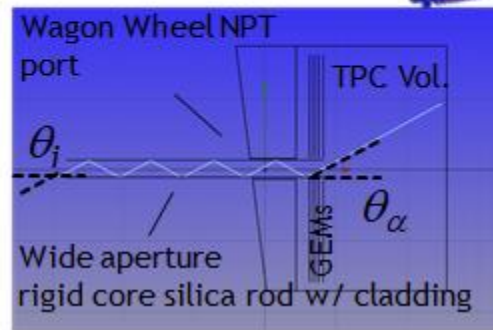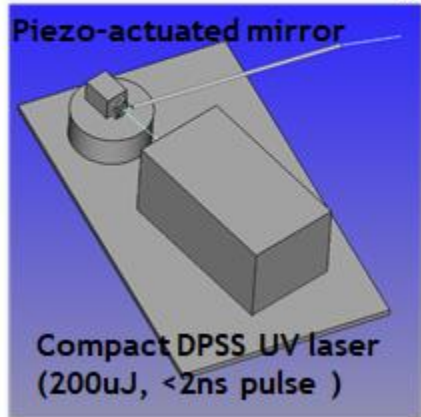

- Rigid "light pipe" delivers laser beam at controlled angles (w/ large N.A.) into TPC volume
- Micro-actuated mirror allows a single laser beam to sweep an entire quadrant of the TPC volume




## SAMPA progress (ADC, FE+ADC)

- ADC and FE+ADC components
- ENOB of ADC is found to be better than that of SAMPA v4
  - Improvement at 18MHz is seen and is close to expected
- Pulse shape is successfully measured by FE+ADC


	18.5 MSPs	
Amplitude (% of maximum)	ADC V4 ENOB (bits)	ADC V5 ENOB avg. (bits)
40	9.2	9.2
50	8.6	9.1
70	8.6	8.9
90	8.2	8.7

- 1, CSA+Shaping only
- 2, ADC only
- 3, Inclusive chain (FE+ADC)

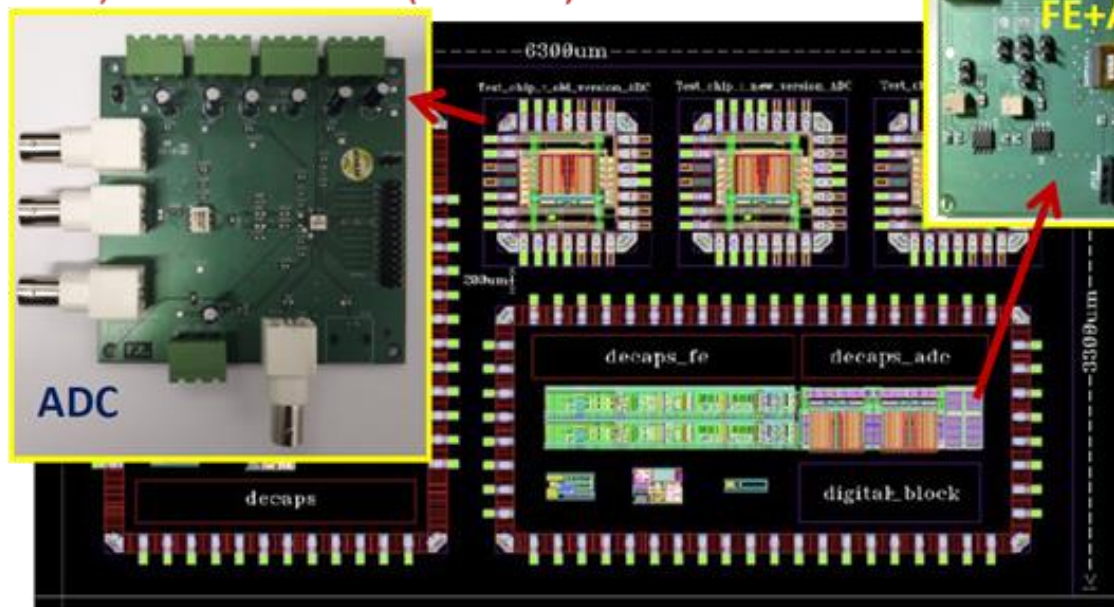

80nsec, 30mV/fC

Response with a 45pF charge injection

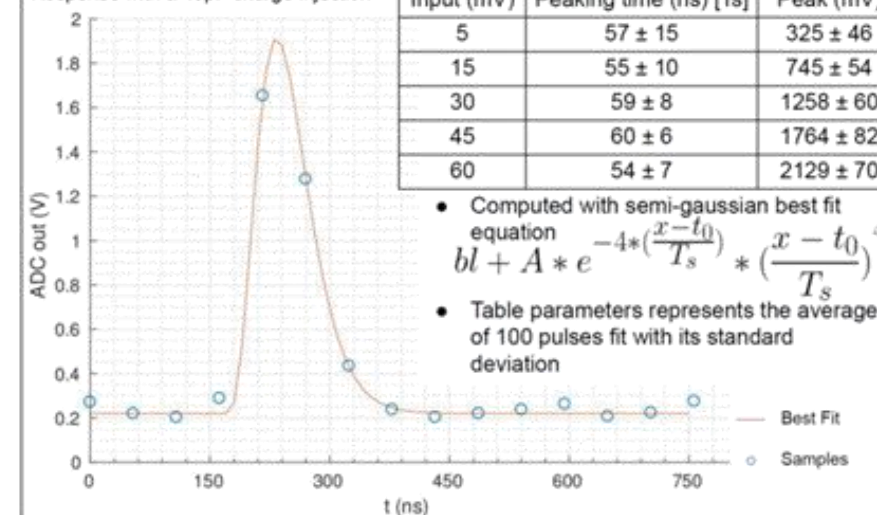


# sPHENIX TPC CONSTRUCTION

25

- We are also building the TPC
  - Mandrel
    - ✦ Inner FC
    - ✦ Outer FC

# sPHENIX TPC CONSTRUCTION




25

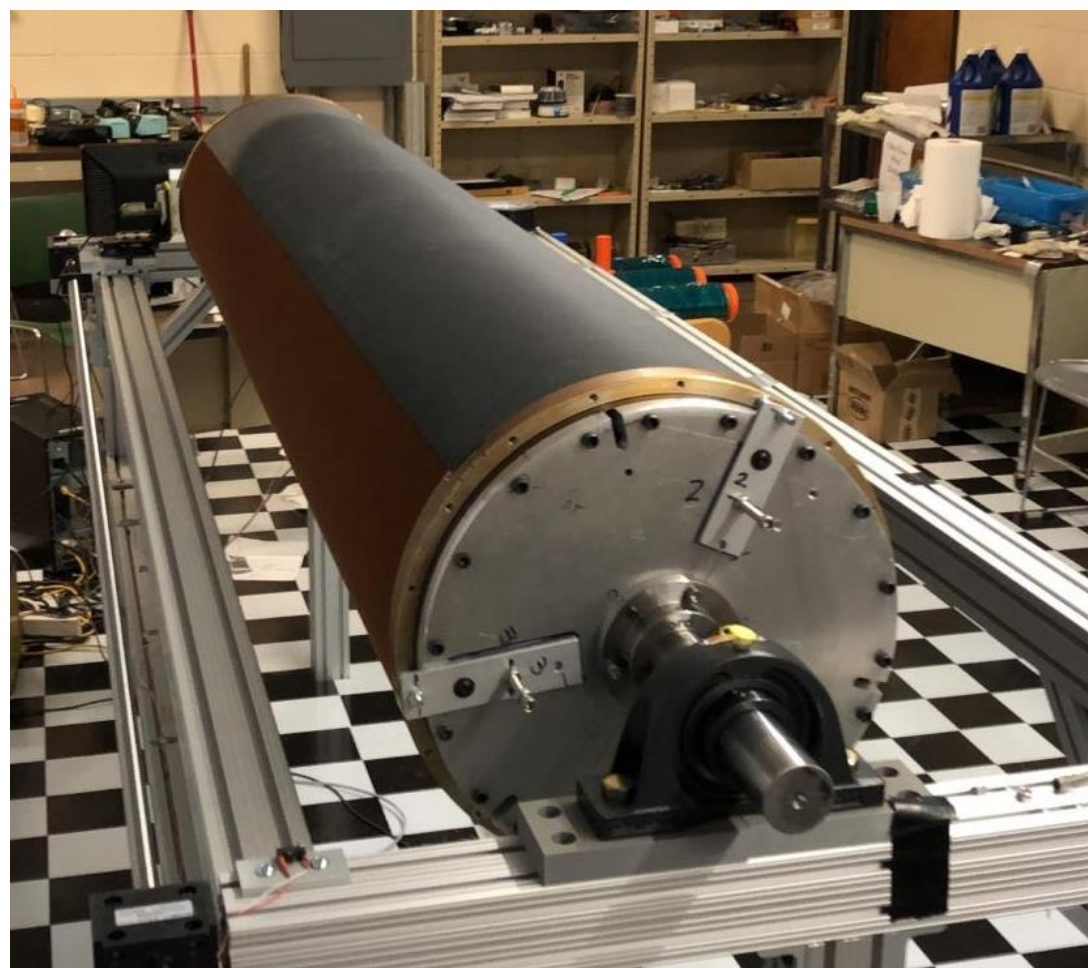



# sPHENIX TPC CONSTRUCTION


25

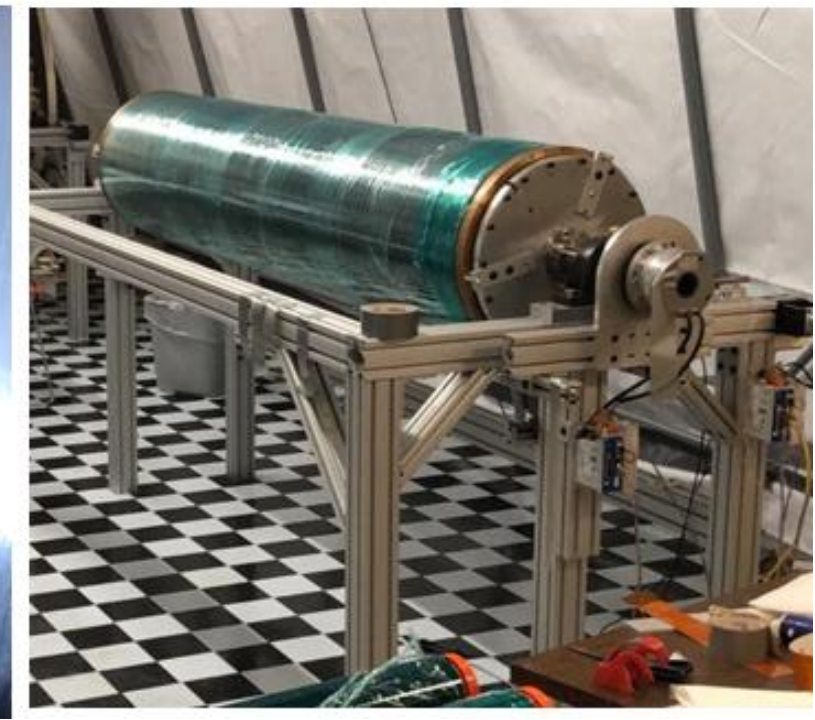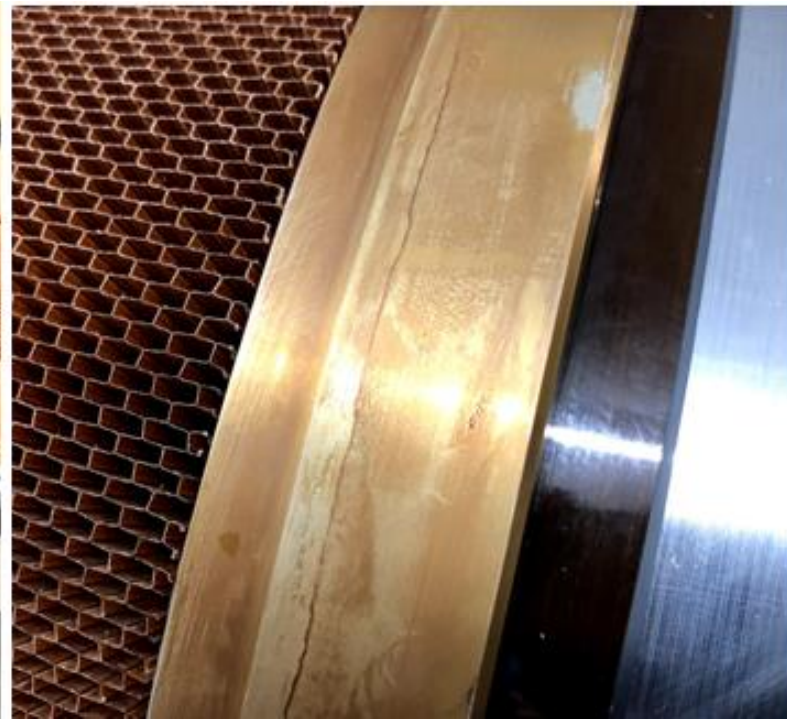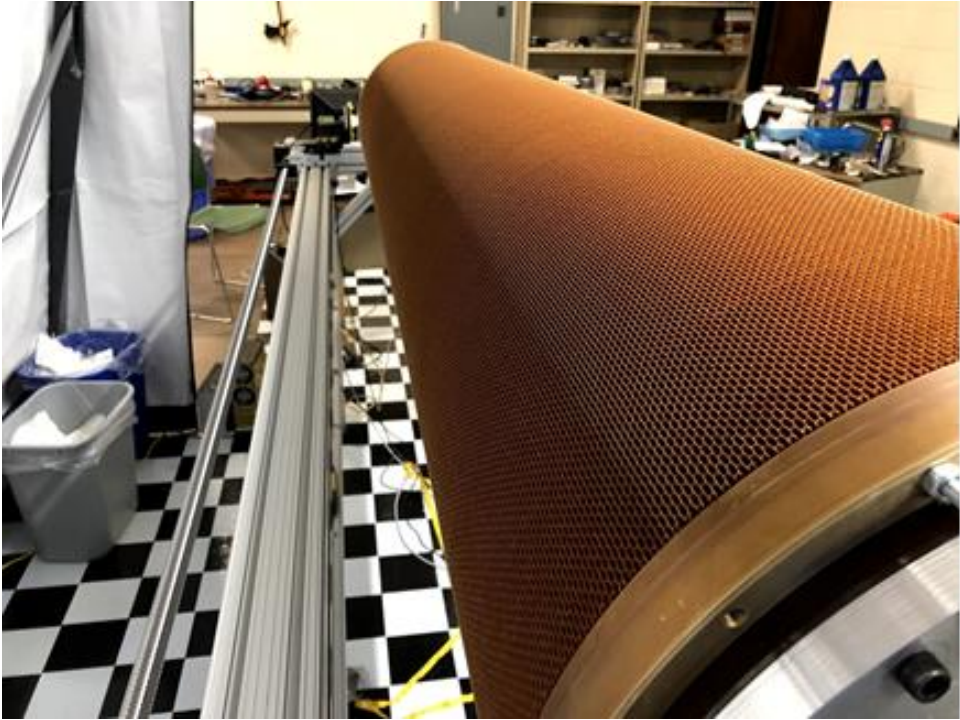




# sPHENIX TPC CONSTRUCTION

25

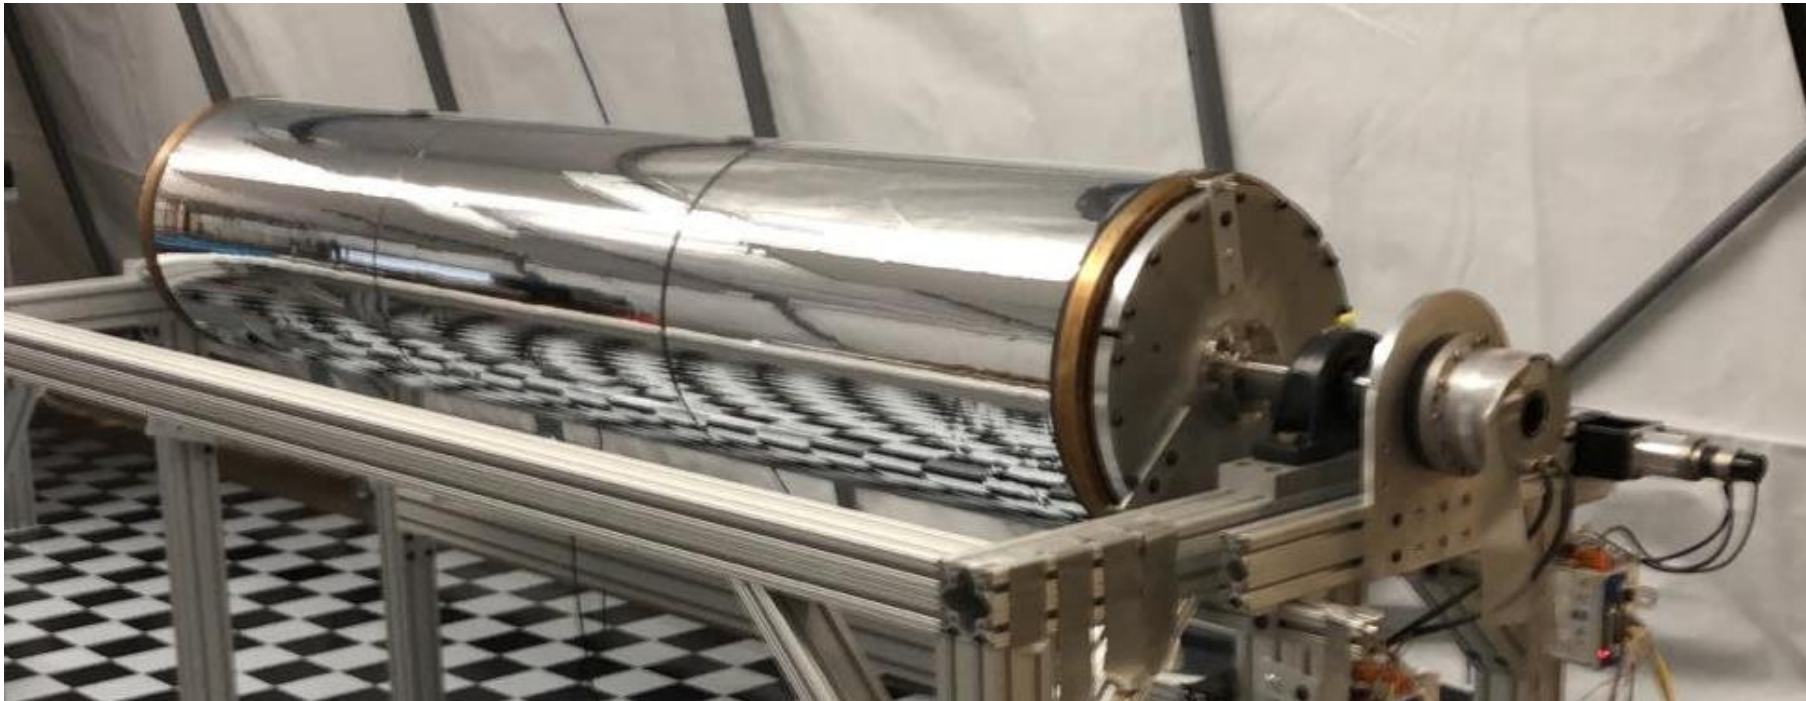

# sPHENIX TPC CONSTRUCTION

25

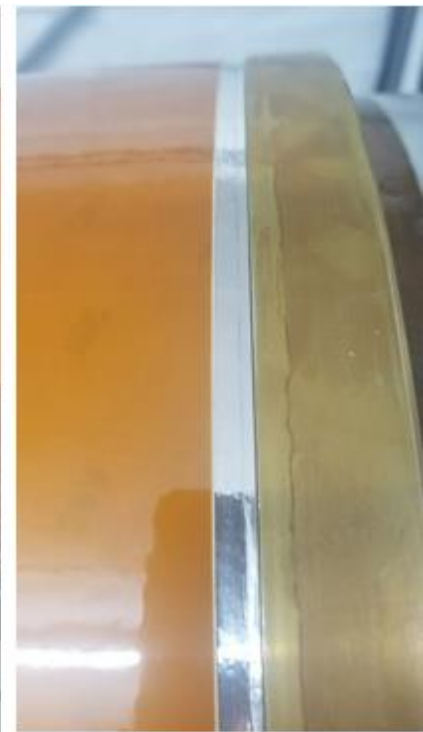



# sPHENIX TPC CONSTRUCTION

25





# sPHENIX TPC CONSTRUCTION


26





# sPHENIX TPC CONSTRUCTION

26

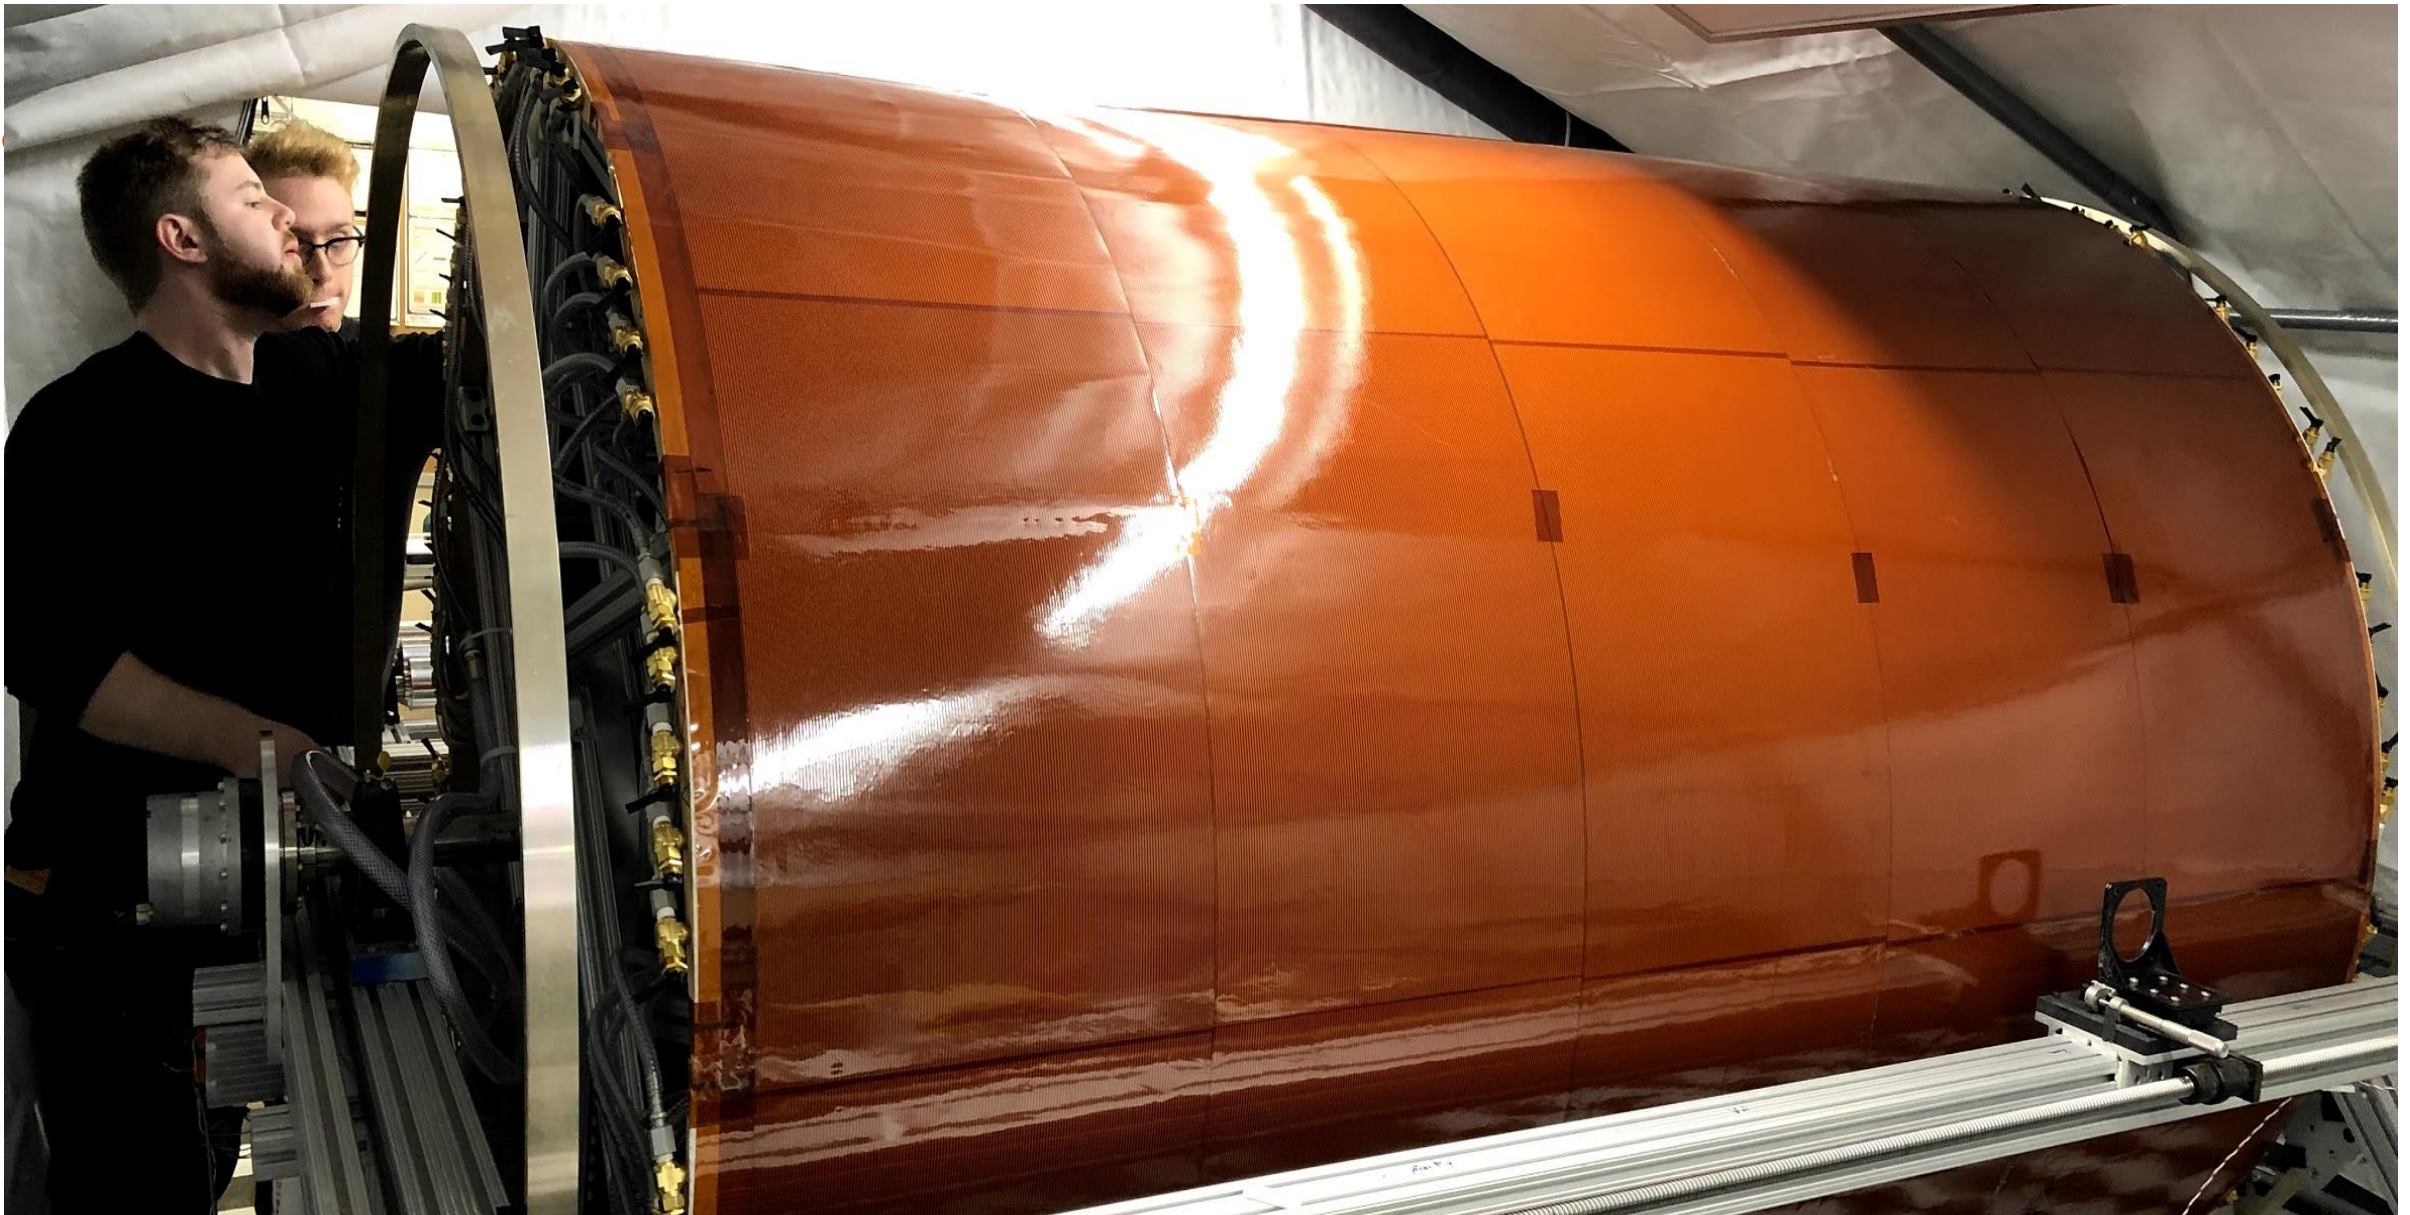



# sPHENIX LASER SYSTEM

27

- **Laser calibration**



- Determine drift velocity throughout TPC volume
- Determine electric field distortions
- Determine precise alignment of field cage w.r.t. endcap and magnetic field

- **Strategy**

- Shine diffuse laser light onto central membrane and liberate clusters of charge
- Shoot laser beams into TPC volume to mimic straight particle tracks
- Compare straight tracks to displaced/distorted tracks
  - ✦ Beam ON vs OFF (space charge effect)
  - ✦ B-field ON vs OFF ( $\mathbf{E} \times \mathbf{B}$  effect)

- **Drift velocity**


- Charge from central membrane travels full drift distance → **absolute integrated drift velocity**
- Single sweeping laser beam → continuous **sampling of drift velocity**/quadrant of the TPC volume
- Integrated drift time → **hard constraint** for point by point determination of drift velocity

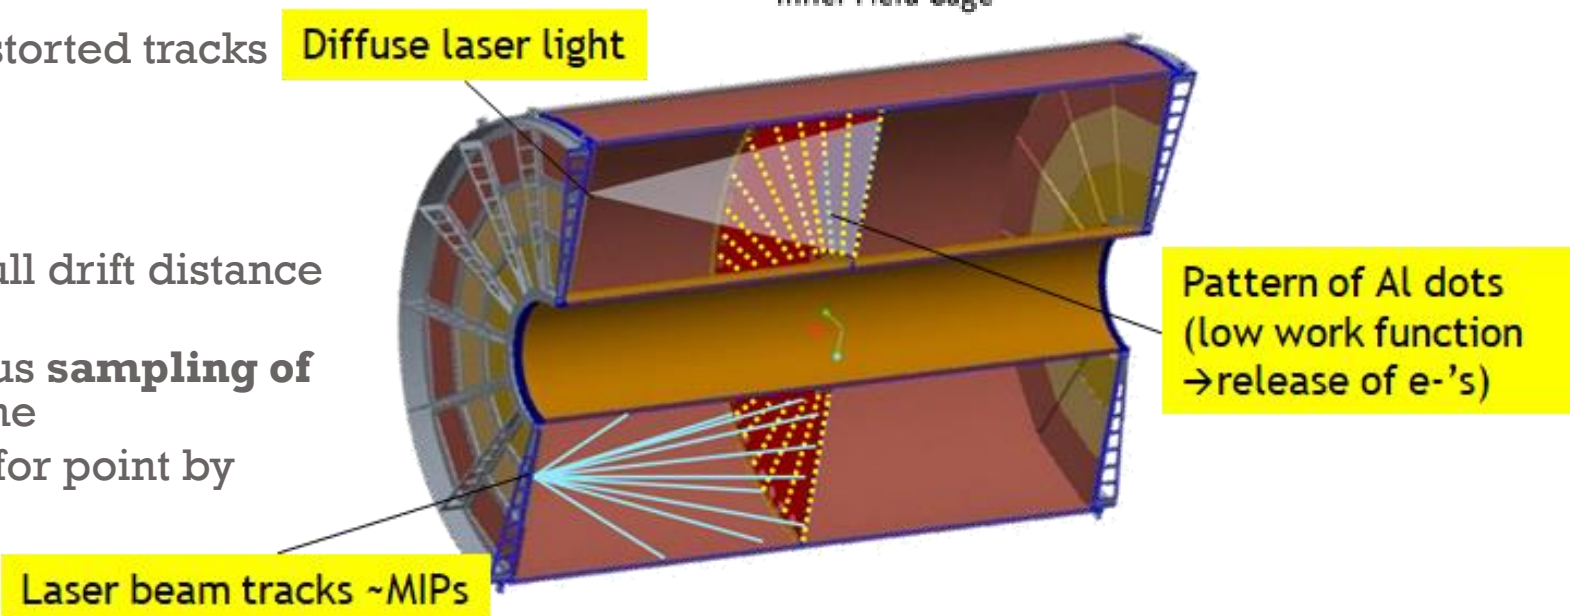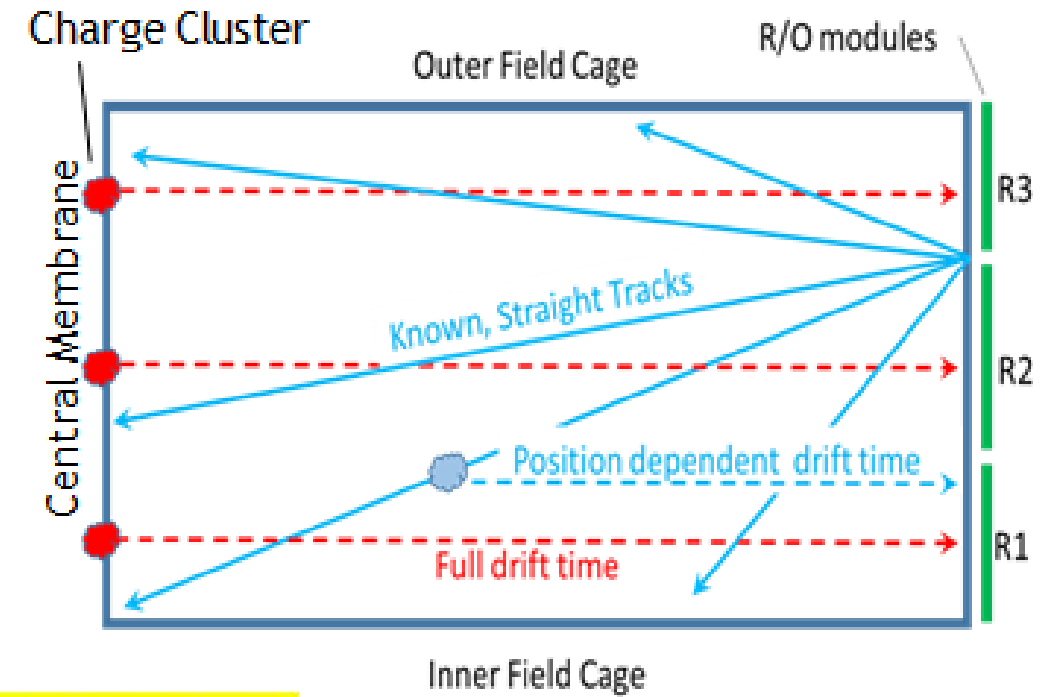




# sPHENIX TPC FAST OUTER LAYER: CALIBRATION

28

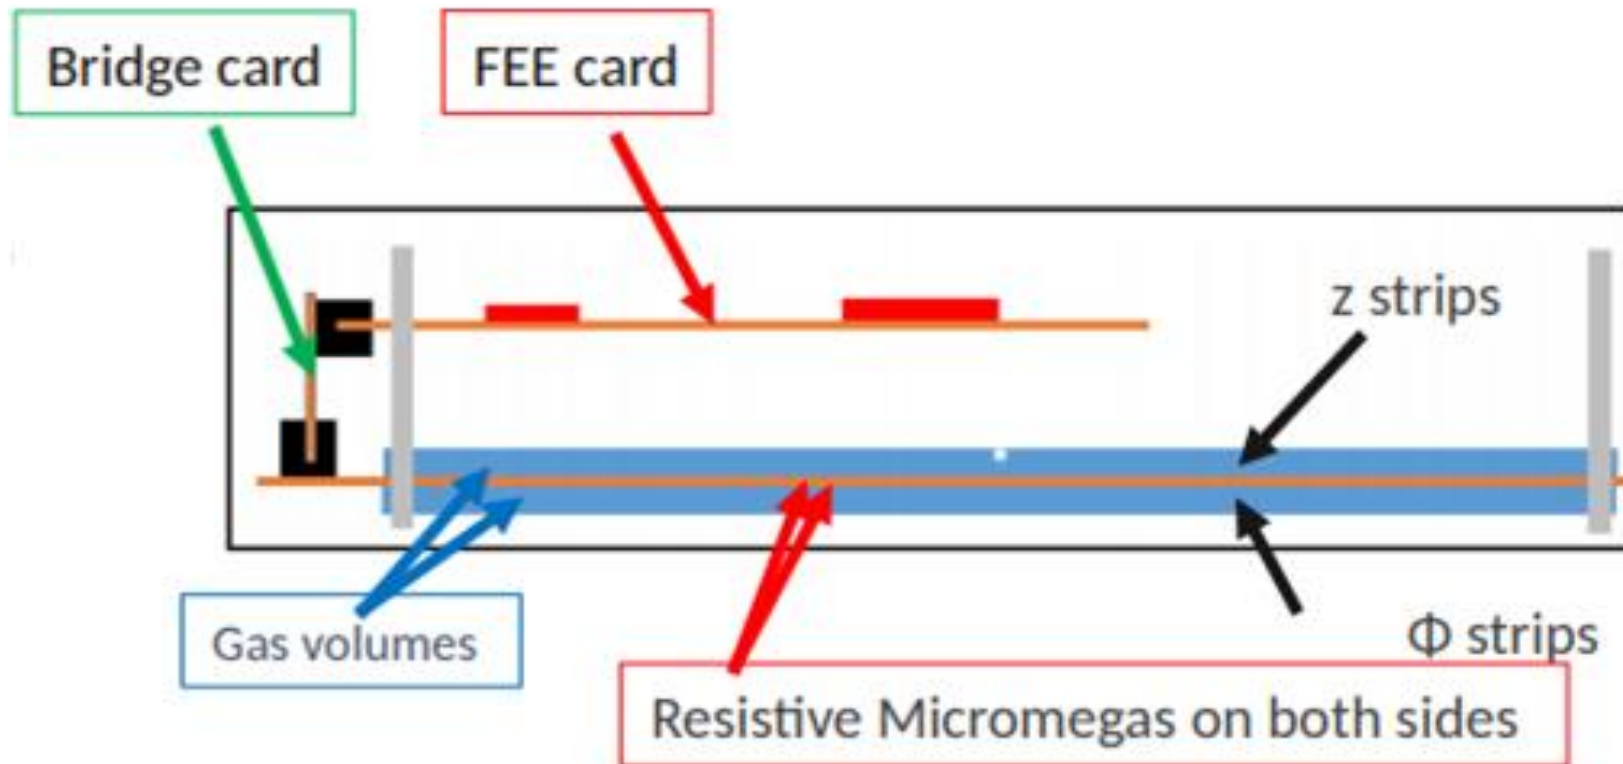


# sPHENIX TPC FAST OUTER LAYER: CALIBRATION


28

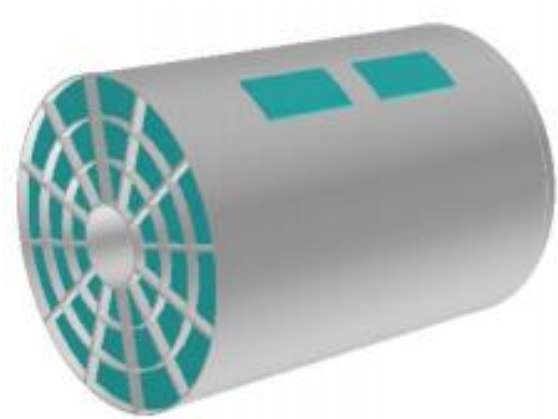


Two tiles  
One on each side of the  
central membrane  
In front of one GEM  
sector

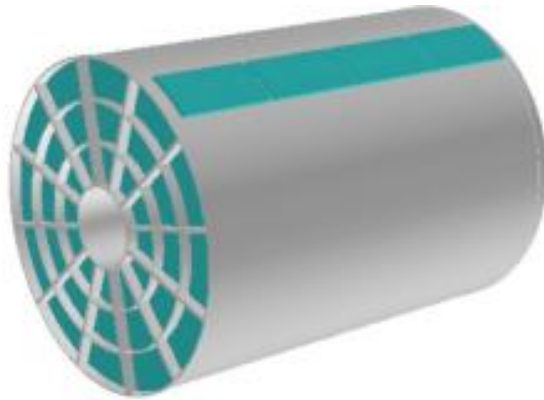

Four tiles  
Covering full z  
acceptance  
In front of one GEM  
sector  
Allows to monitor the  
full z extend of the  
distortions

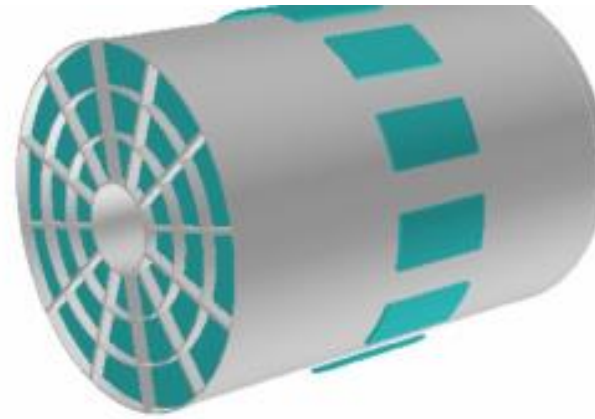


12 tiles at mid-rapidity  
In front of each GEM sector  
Monitor Gain/IBF fluctuations  
Enables some physics at mid  
rapidity  
Suffers from dead area due  
to central membrane

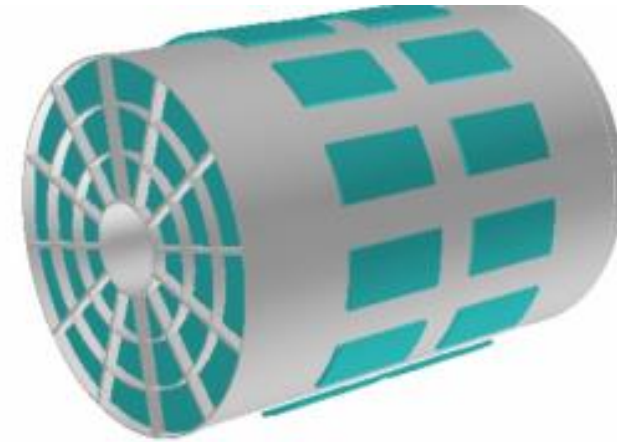

24 tiles  
12 on each side of the  
central membrane  
One tile in front of each  
GEM sector  
Same as 12 Tiles but no  
dead area from CM

# sPHENIX TPC FAST OUTER LAYER: CALIBRATION

28

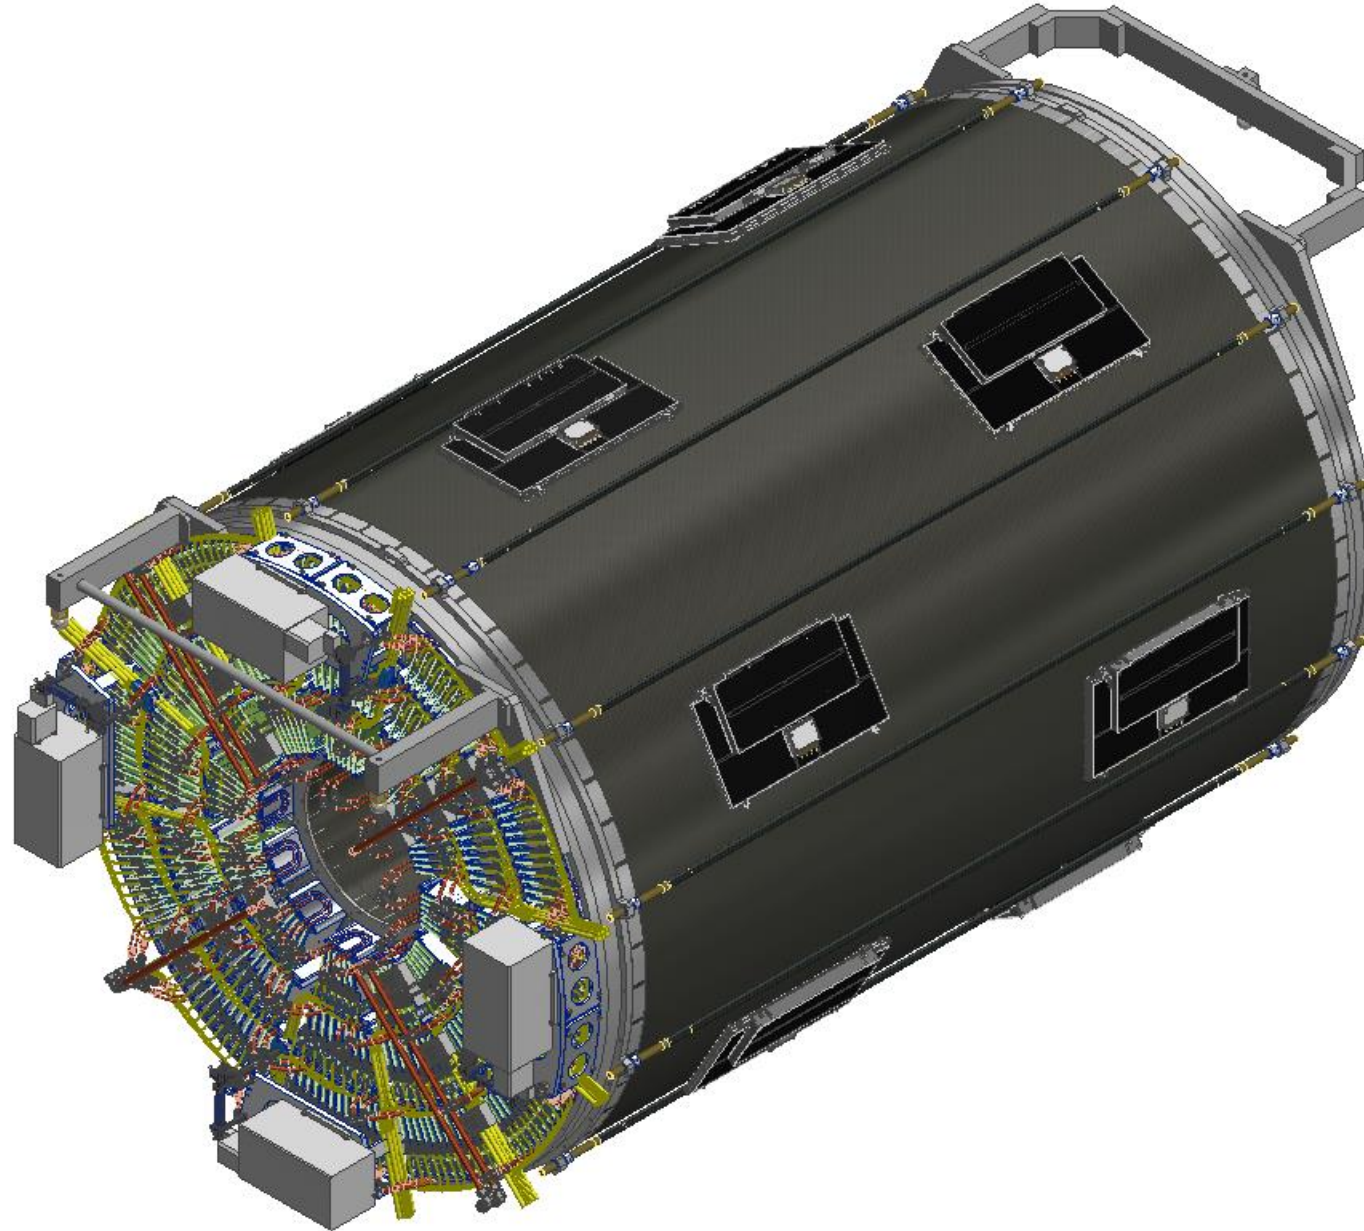



# sPHENIX TPC: READOUT MODULES

29


- R2 GEM structure



# sPHENIX TPC: READOUT MODULES

29


- R2 GEM structure

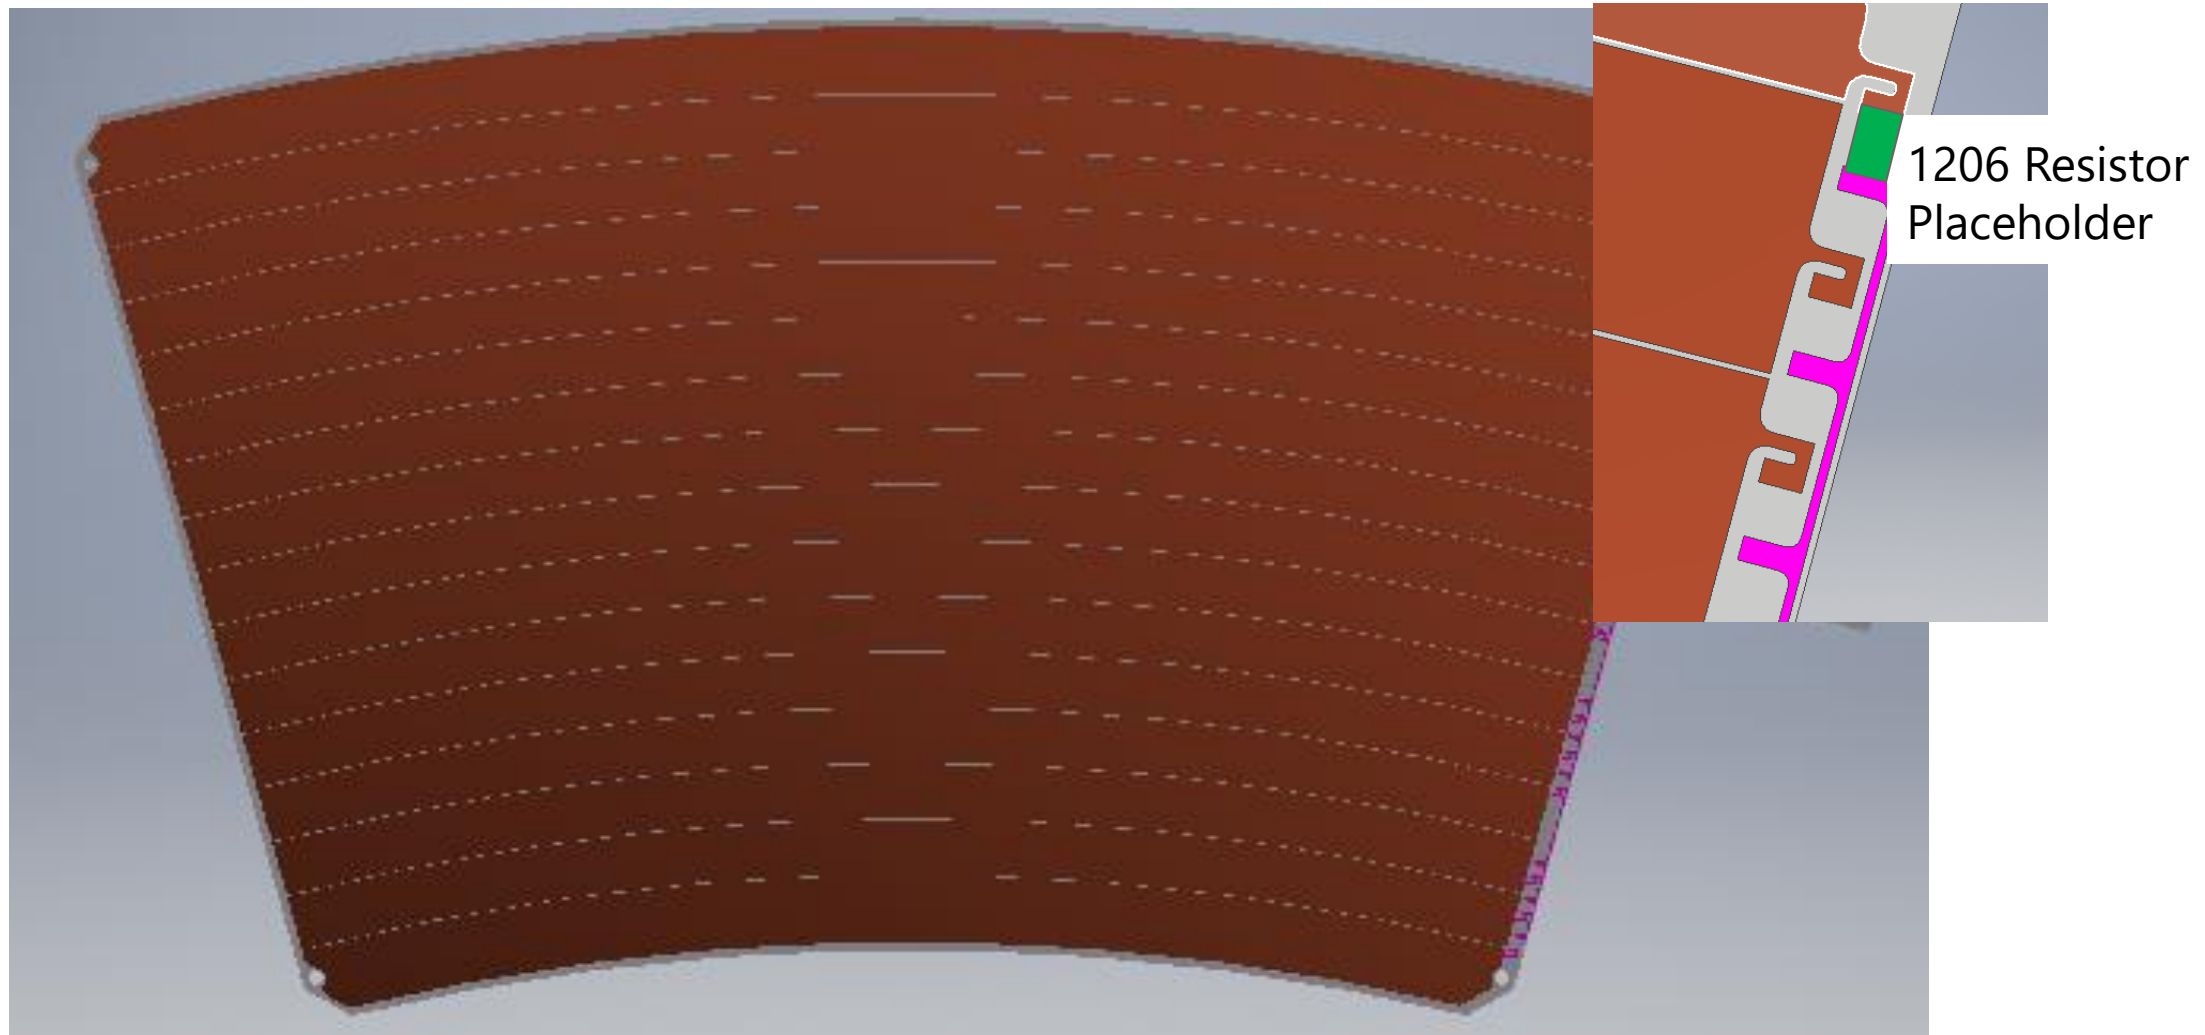

# sPHENIX TPC: READOUT MODULES

29

- R2 GEM structure

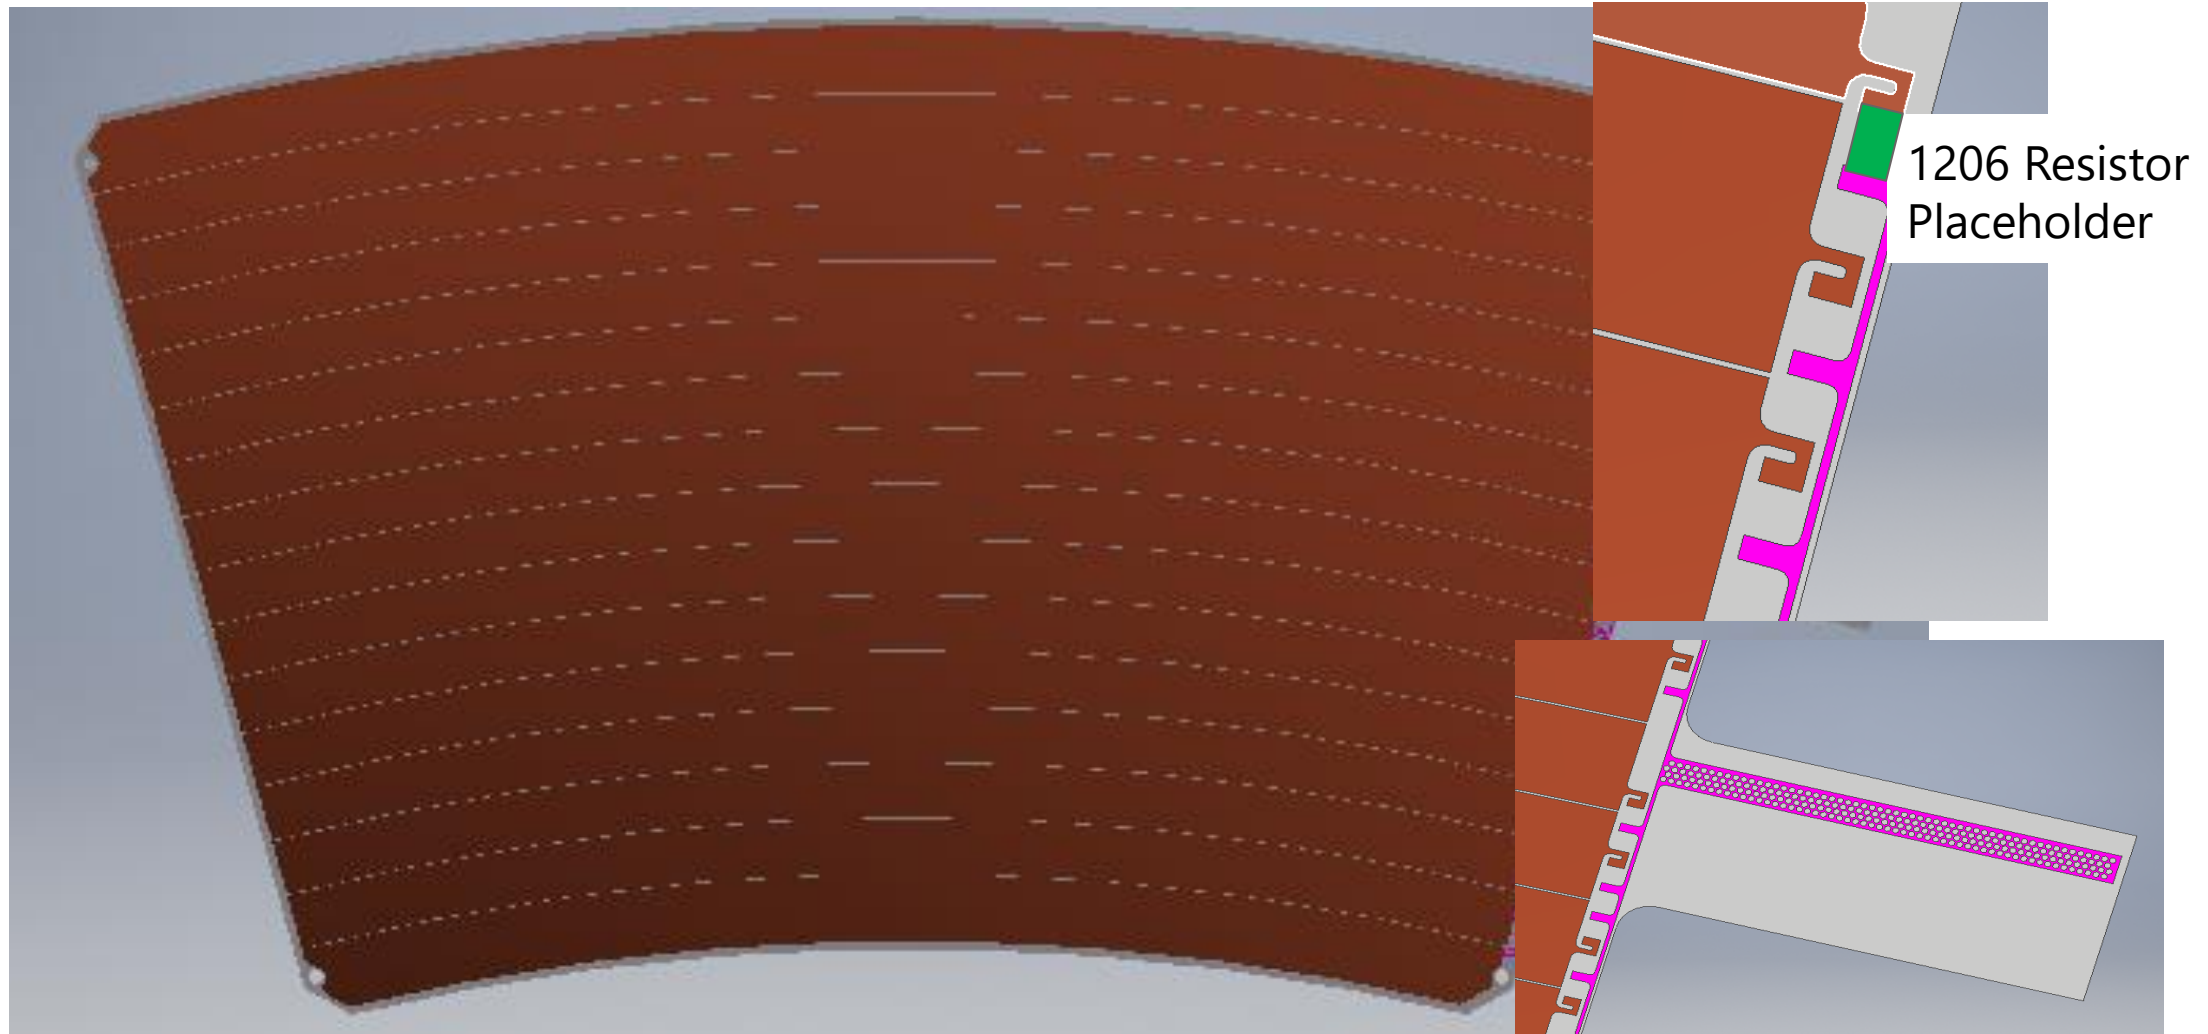




# sPHENIX TPC: READOUT MODULES

29

- R2 GEM structure

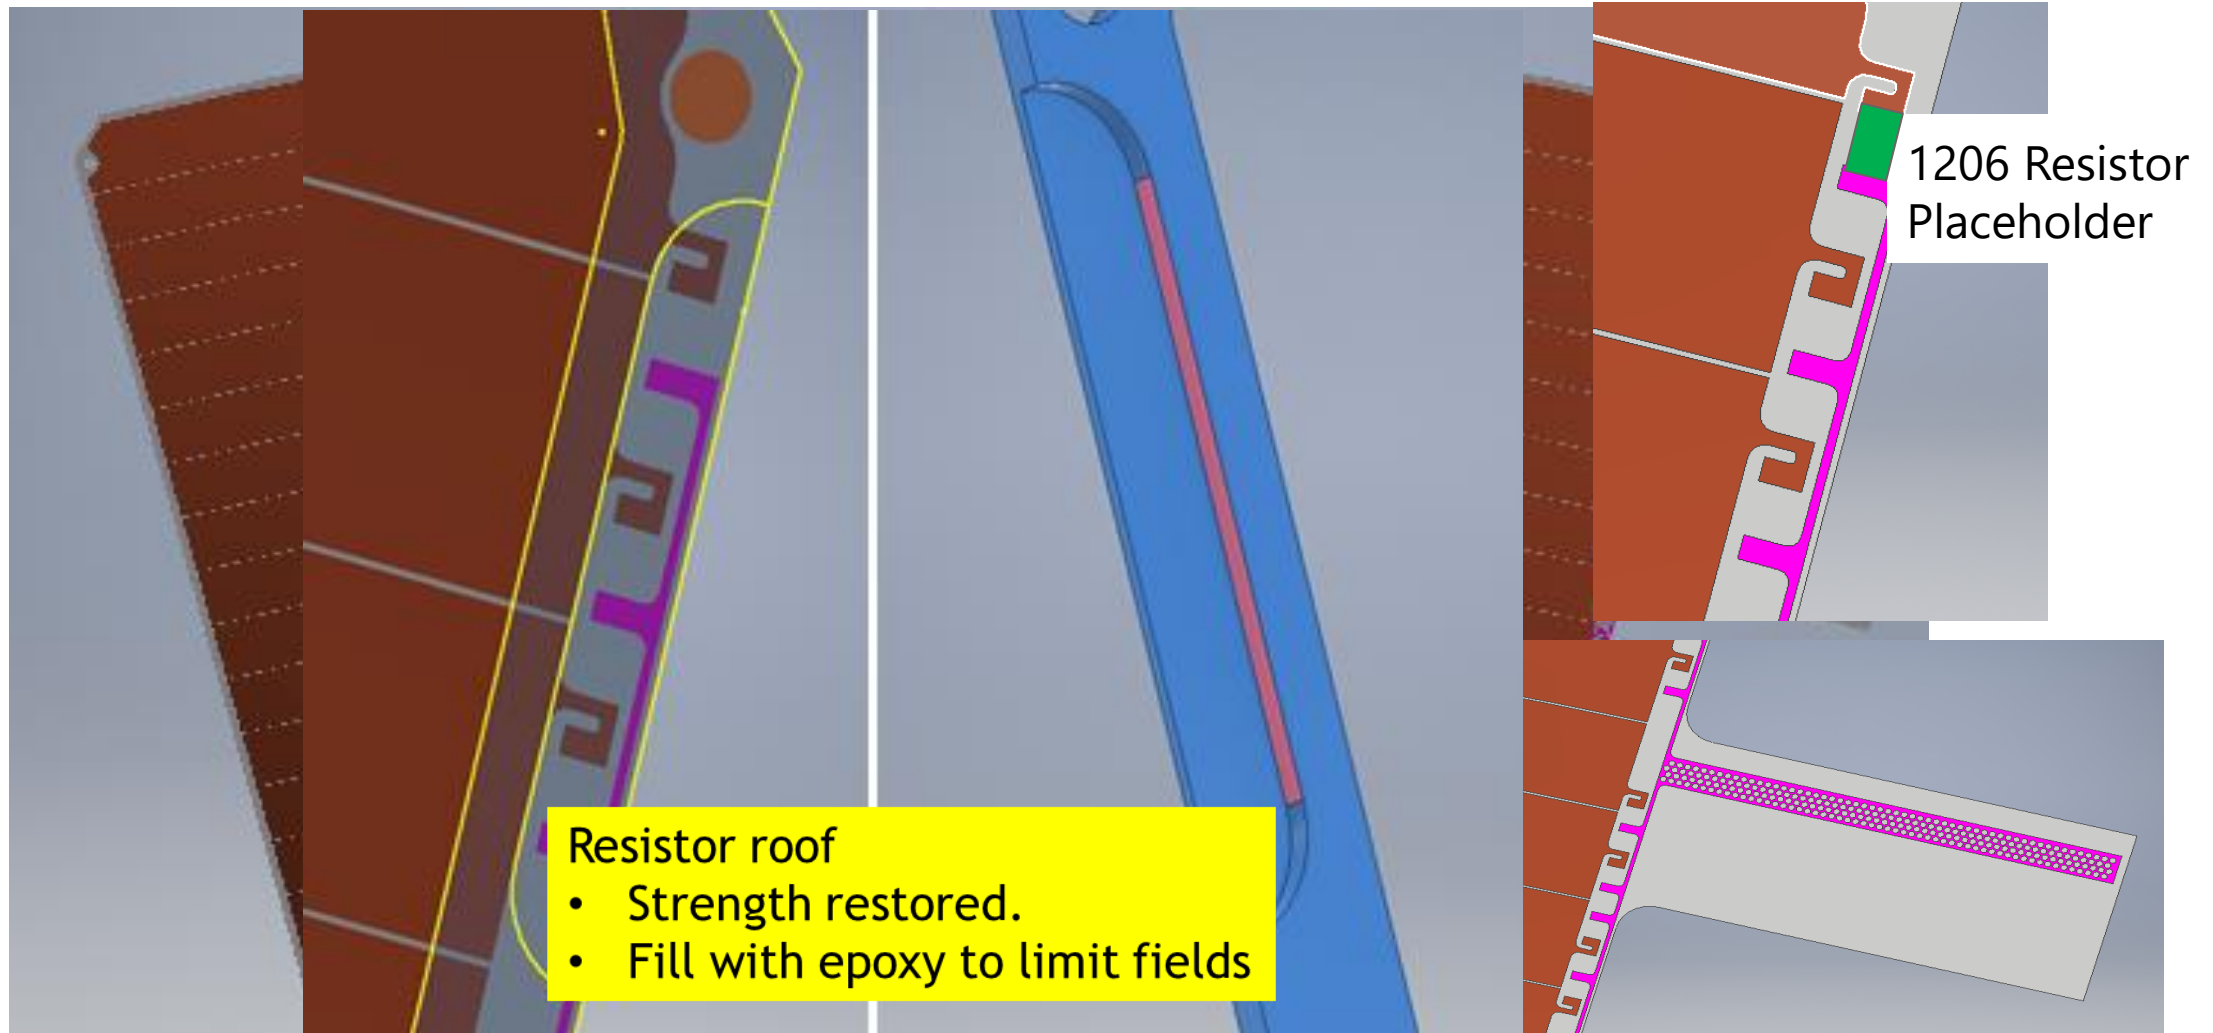

# sPHENIX TPC: READOUT MODULES

30

