



# CEPC Site Selections and Civil Engineering Designs

Yong Hu,  
representing the Chinese Review Committee for CEPC Civil Cost

# Content


- **1 Design Progress of Sites**
- **2 Civil Engineering**
- **3 Civil Cost Estimation**
- **4 Summary**

# Introduction

- This talk is about CEPC Site Selections and Civil Engineering Designs
- This talk relates to the TDR chapter 10.1~10.6
- The content relates to the “charge letter” item 7 and 9

*01*


# Design Progress of Sites



# 1 Design Progress of Sites



YREC



HDEC



中国电建  
POWERCHINA

中国电建集团华东勘测设计研究院有限公司  
HUADONG ENGINEERING CORPORATION LIMITED




ZNEC



中国电建  
POWERCHINA

中南勘测设计研究院有限公司  
ZHONGNAN ENGINEERING CORPORATION LIMITED

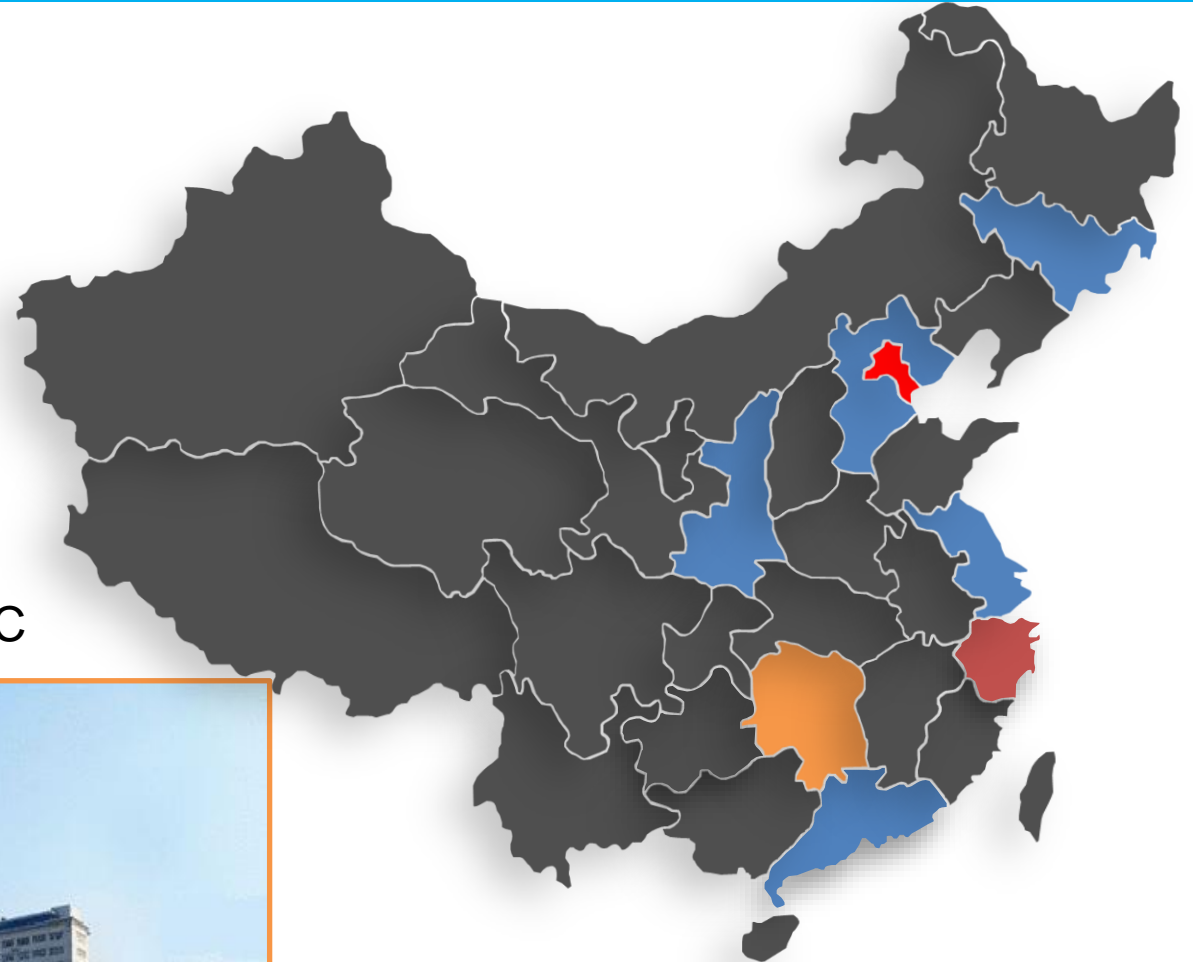

# 1 Design Progress of Sites



黄河勘测规划设计研究院有限公司  
Yellow River Engineering Consulting Co., Ltd.

Pre-CDR

CDR

TDR



2013.4 ~  
2015.3

2014.5 ~  
2016.8

2014.6 ~  
2017.7

2016.9

2017.7 ~  
2017.9

2017.9 ~  
2018.8

2018.9 ~  
2023.6

• Site selection  
in Hebei

• Site selection  
in Guangdong

• Site selection  
in Shaanxi

• Site selection  
in Jiangsu

• Site selection  
in Baoding,  
Hebei &  
Zhejiang

• 100km design of  
Qinhuangdao

• TDR design  
(Qinhuangdao,  
Changchun)

# 1 Design Progress of Sites



中国电建集团华东勘测设计研究院有限公司  
HUADONG ENGINEERING CORPORATION LIMITED


From March 25 to 29, 2018

The starting point of Huzhou site



By June 2023

the work that has been done is as follows

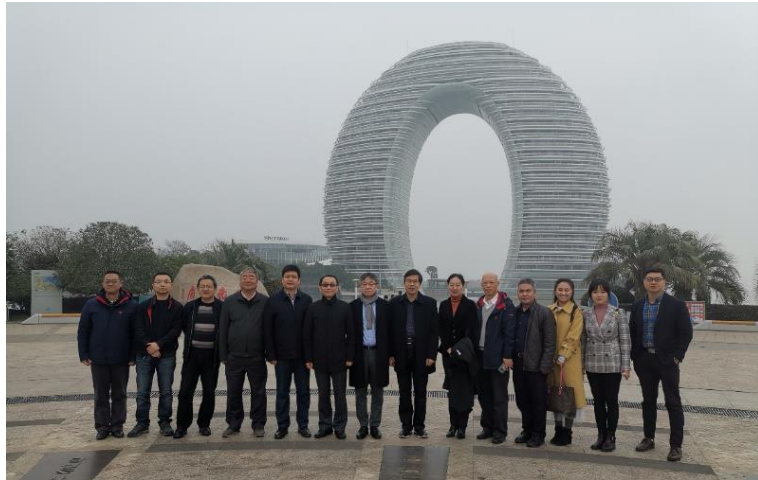

The General Office of the Zhejiang Provincial People's Government invited CEPC-SPPC project experts from The High Energy Institute to visit the four sites preselected in Zhejiang province, and organized a CEPC-SPPC site evaluation meeting in Zhejiang. Huzhou site was preliminarily recommended as candidate site of Zhejiang Province after analysis and study.

- **CEPC report on site selection (Zhejiang Huzhou)**

*Answer the questions-Why did CEPC choose huzhou*

- **CEPC report on socio-economic assessment**

*Answer the questions-Why did huzhou choose CEPC*

- **CEPC Technology Design Report on Civil engineering of the first stage**

- **CEPC report on science city concept plan**

*Find a comfortable home for scientists*

# 1 Design Progress of Sites



中南勘测设计研究院有限公司  
ZHONGNAN ENGINEERING CORPORATION LIMITED

From December, 2018

The starting point of Changsha site

ZNEC continually carries out necessity demonstration and study on construction technology on CEPC Changsha Site.

- In July 2021, the government of Changsha City entrusted Hunan University to take the lead in the demonstration of the settlement of the CEPC Project in Changsha.
- In September 2021, Hunan University organized the site review meeting of the *Demonstration Report of China (Changsha) CEPC and New International Science City Project*.



*02*


# Civil Engineering

——  
Qinhuangdao  
Huzhou  
Changsha



# 2 Civil Engineering

## 2.1 Location

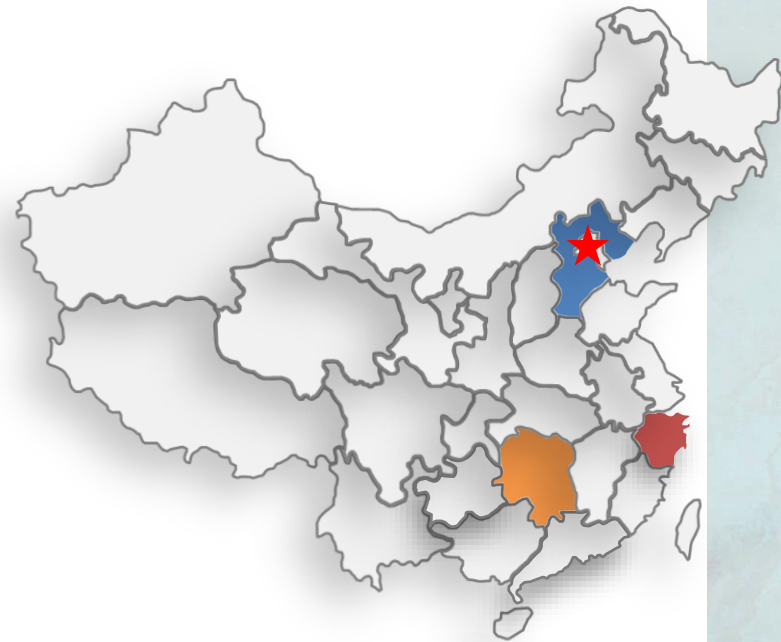

Qinhuangdao is located in the northeast of Hebei Province. It is an important node city in the Beijing-Tianjin-Hebei metropolitan area.



The Qinhuangdao site is situated in the northeast of Hebei province and the northwest of Qinhuangdao city. It is located 478 km north of Shijiazhuang, the provincial capital, 240 km east of Beijing, and 23 km west of Qinhuangdao.

# 2 Civil Engineering

## 2.1 Location



Huzhou is located in the Yangtze River Delta Region.

The Huzhou site is situated in the north of Zhejiang province and central south of Huzhou city. It is adjacent to Hangzhou and about 100km away from Shanghai.



Huzhou


# 2 Civil Engineering

## 2.1 Location




Hunan province lies on the transition zone between the eastern coastal regions and the central and western regions, serving as the junction of the Yangtze River open economic belt and the coastal open economic belt. Changsha city is the provincial capital of Hunan. Changsha site is located in the north of the city. It is about 13km to Changsha airport.


Annual Monthly Mean Temperature (°C)

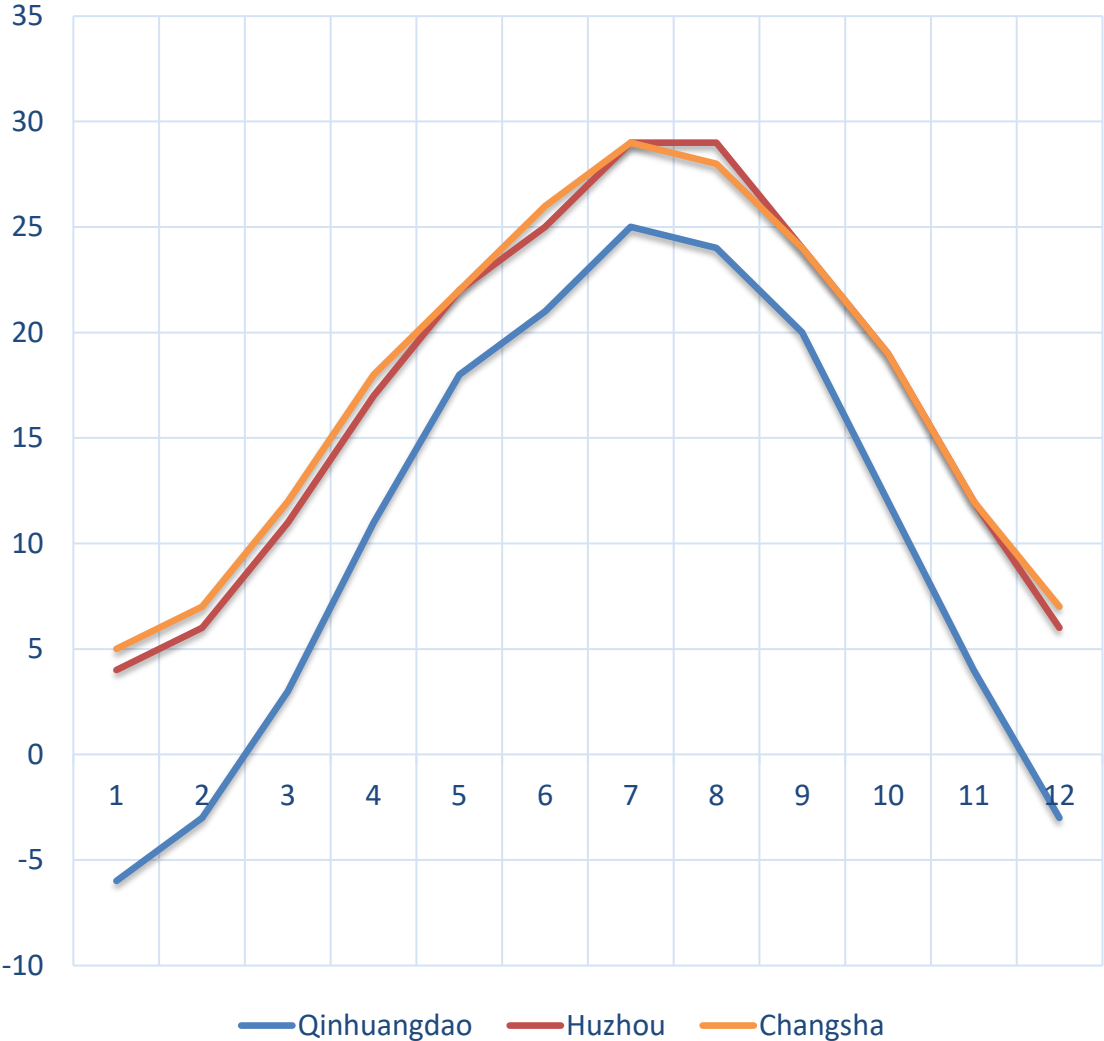

Annual Monthly Mean Humidity (%)

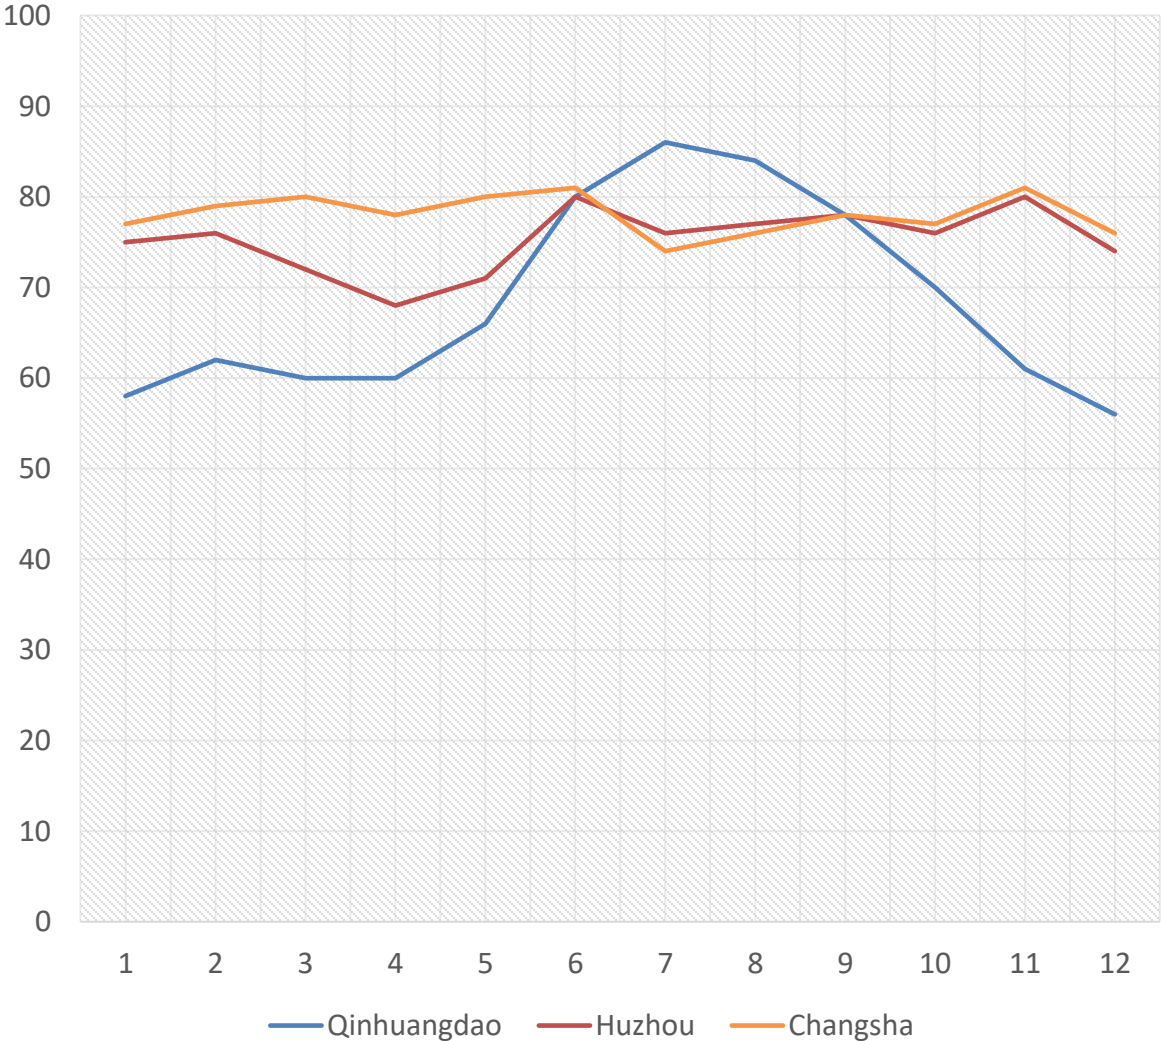


Qinhuangdao

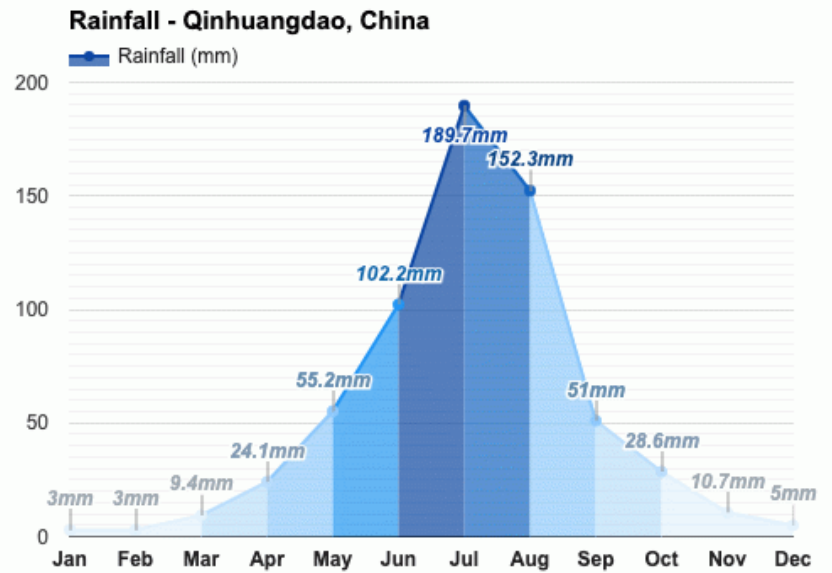


630mm

Huzhou

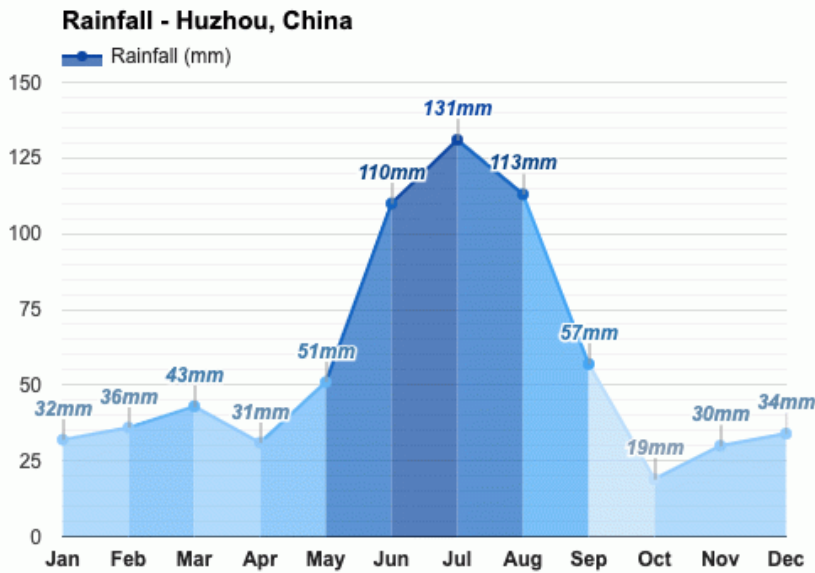

1023mm

Changsha

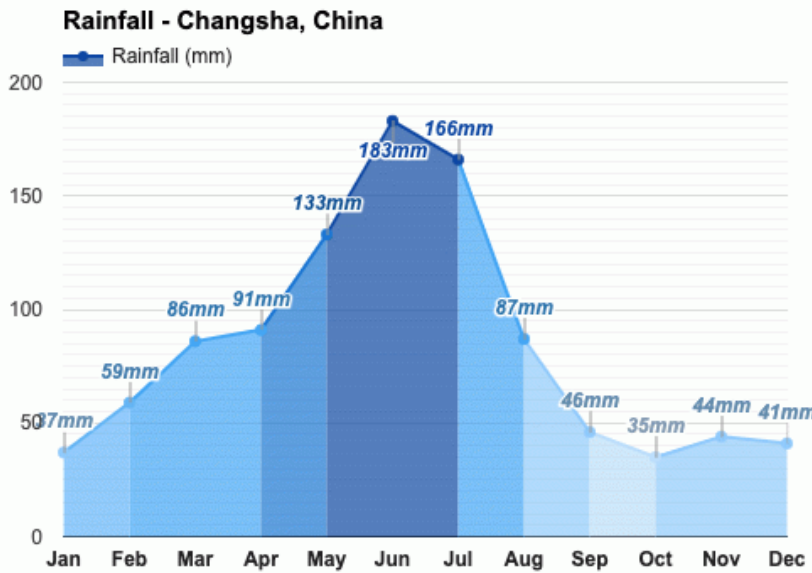


1362mm

Annual mean precipitation

# 2 Civil Engineering

## 2.3 Engineering Geology


Qinhuangdao

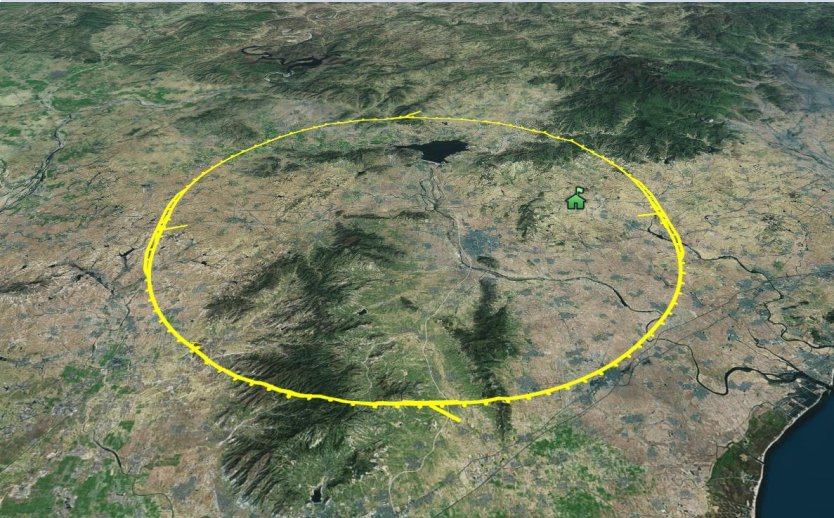

Huzhou



Changsha

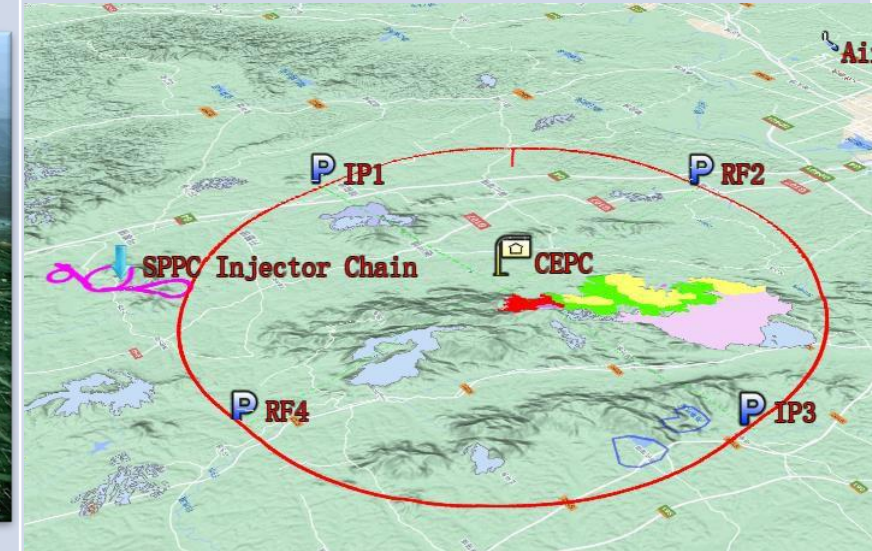

### Topography and landforms




The site is in hilly area. The elevation of most places is 20~200m. The highest elevation is 695m.

The site is in low mountain and hilly area. The elevation of most places is 5~400m. The highest elevation is 710m.

The site is in hilly area. The elevation of most places is 40~200m. The highest elevation is 725m.

# 2 Civil Engineering


## 2.3 Engineering Geology

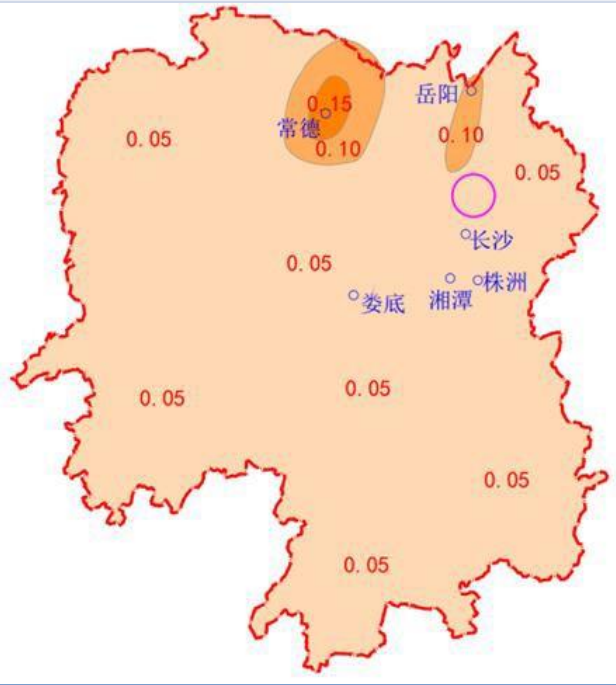Qinhuangdao	Huzhou	Changsha
		
	<b>Seismic peak acceleration</b>	
0.10g~0.15g	0.05g	0.05g
	<b>Basic seismic intensity</b>	
VII	VI	VI

# 2 Civil Engineering



## 2.3 Engineering Geology

Qinhuangdao

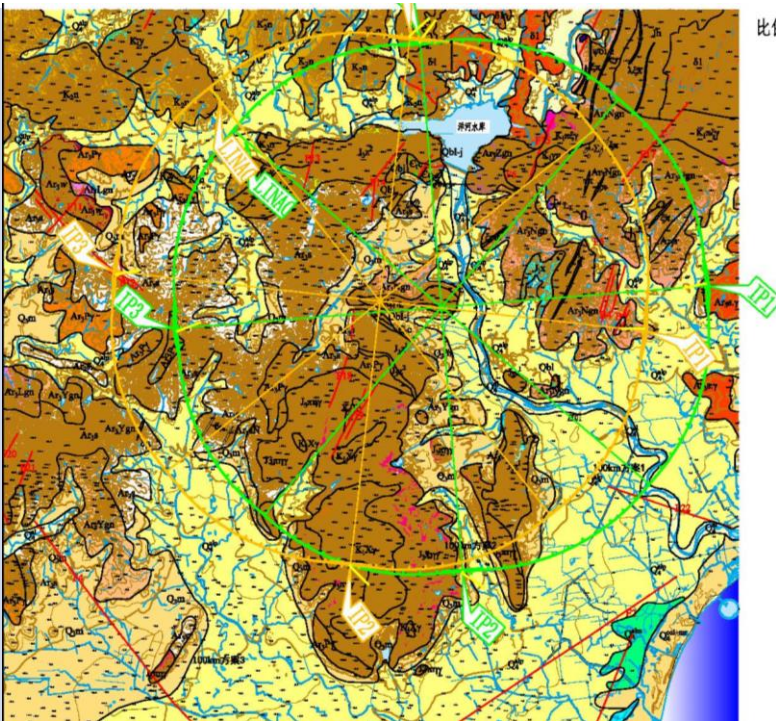

Gneiss  
Granite


Huzhou

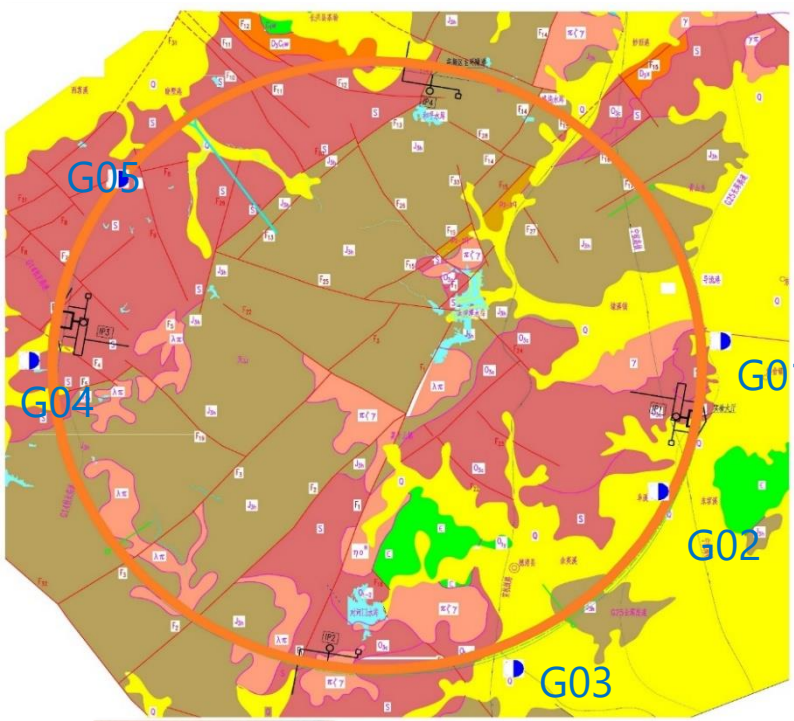

Stratum Lithology

Sandstone  
Tuff


Changsha

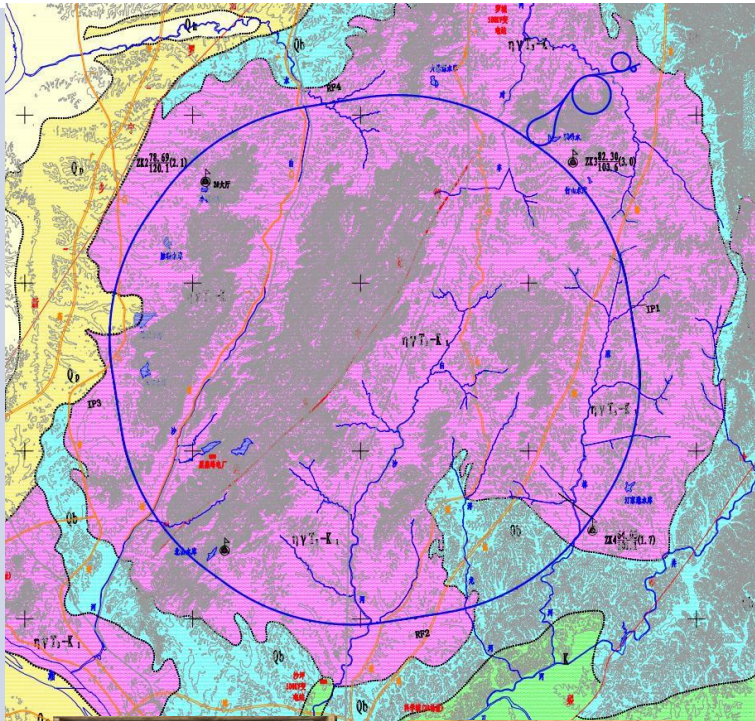

Granite  
Sandstone, Slate




# 2 Civil Engineering

## 2.3 Engineering Geology

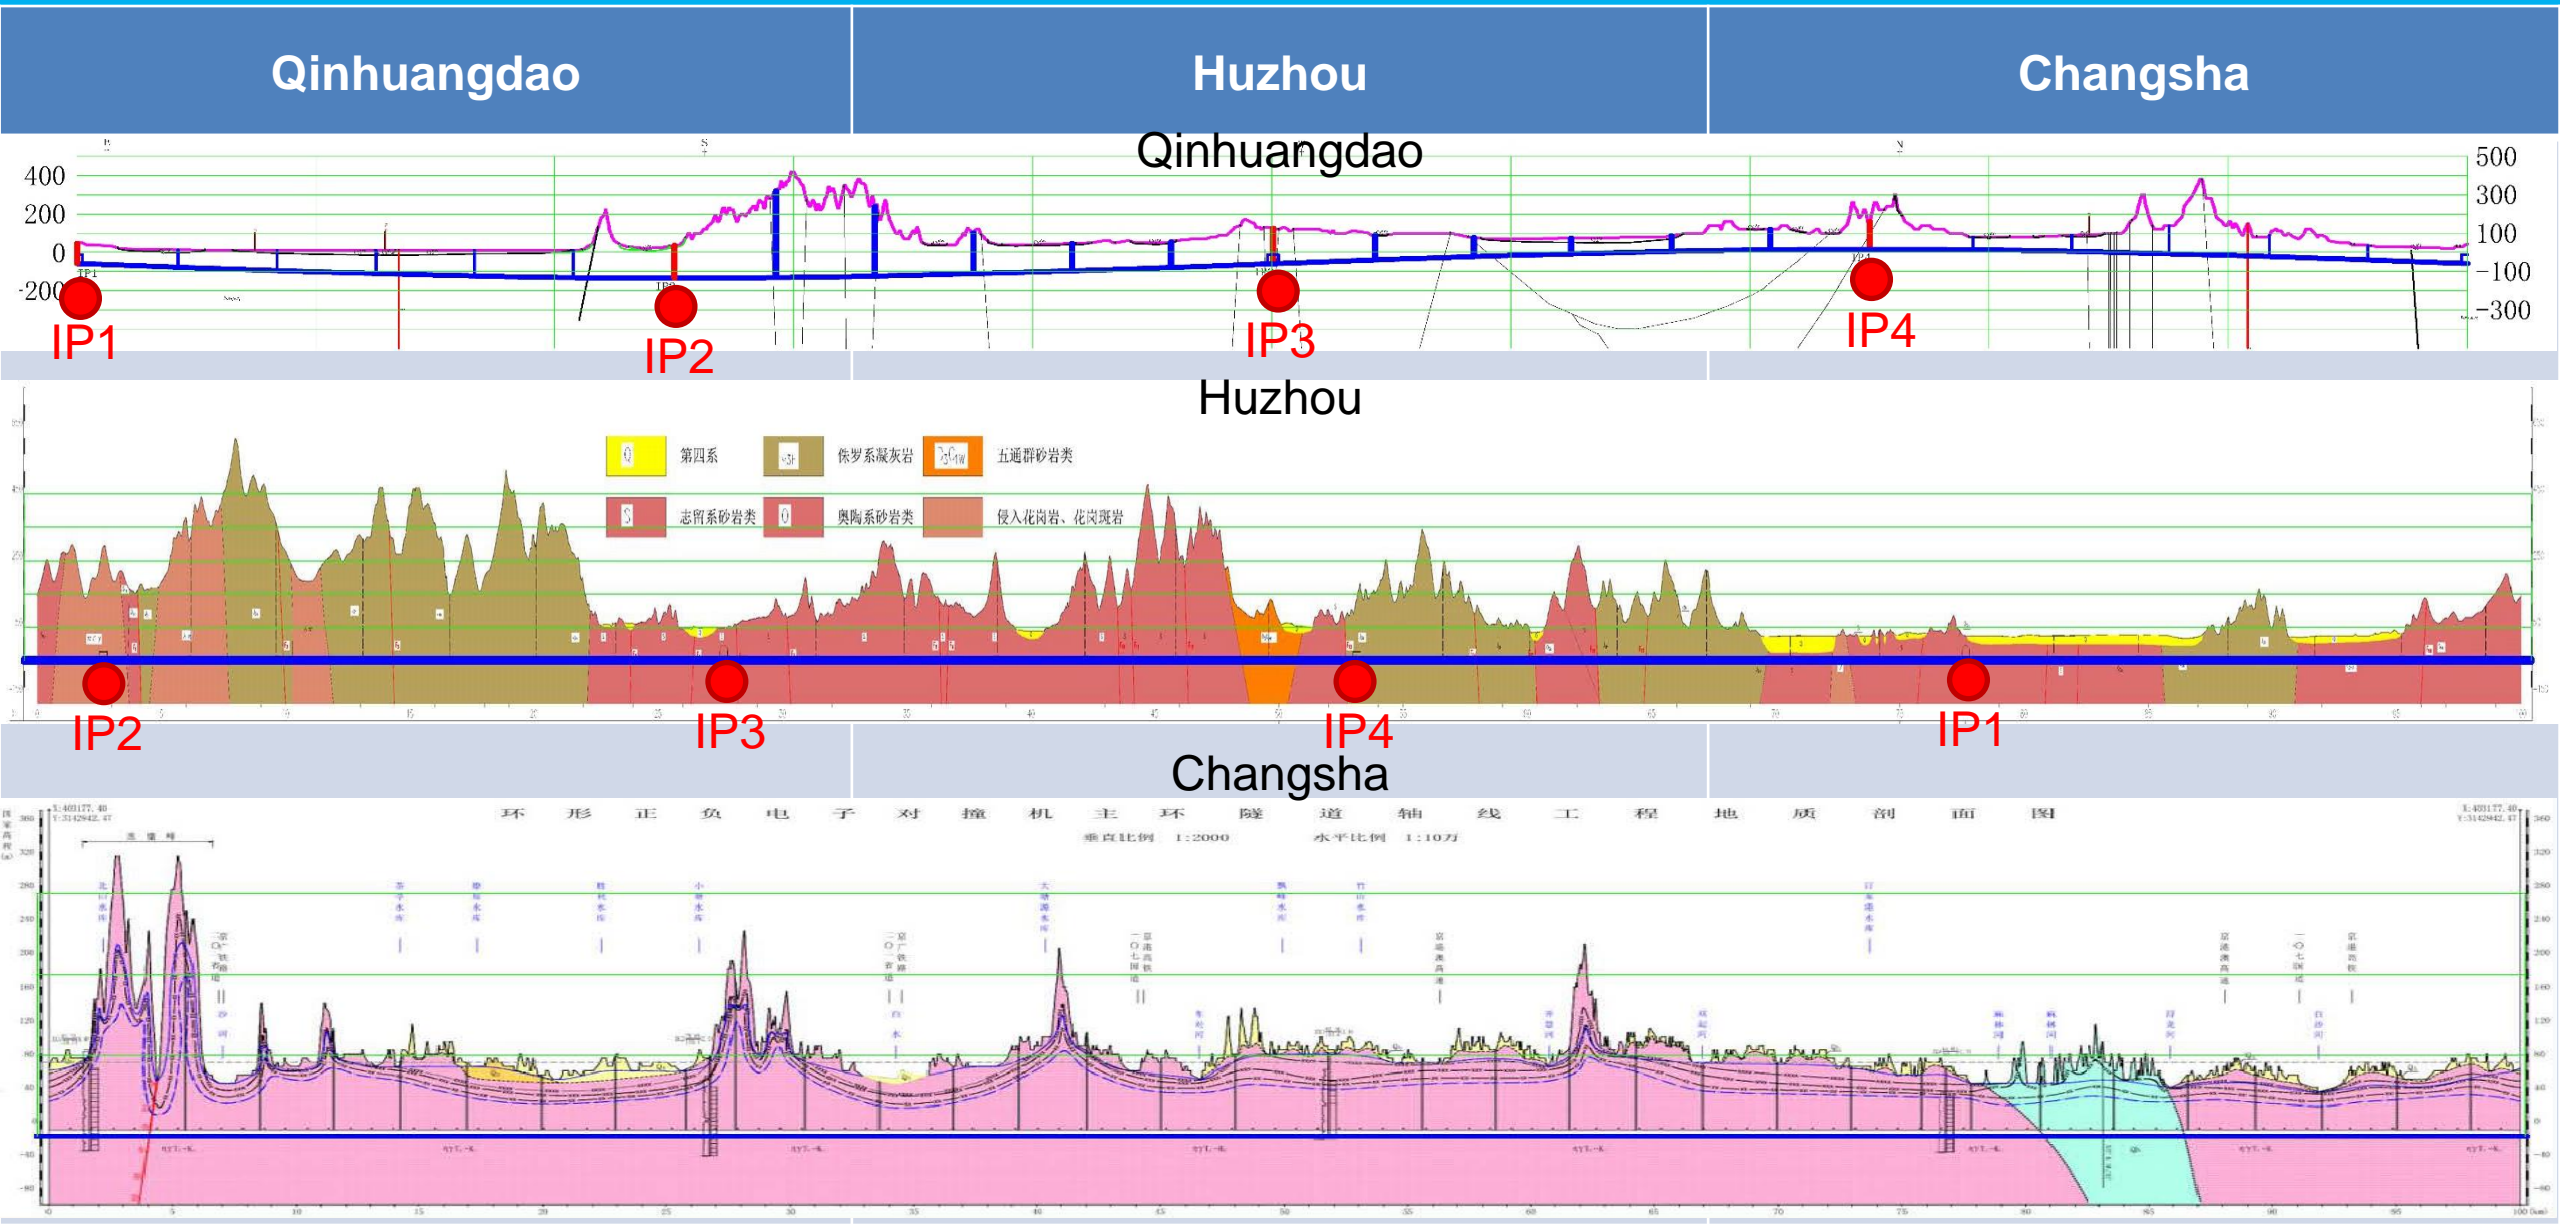

## 2 Civil Engineering



## 2.4 Project Layout

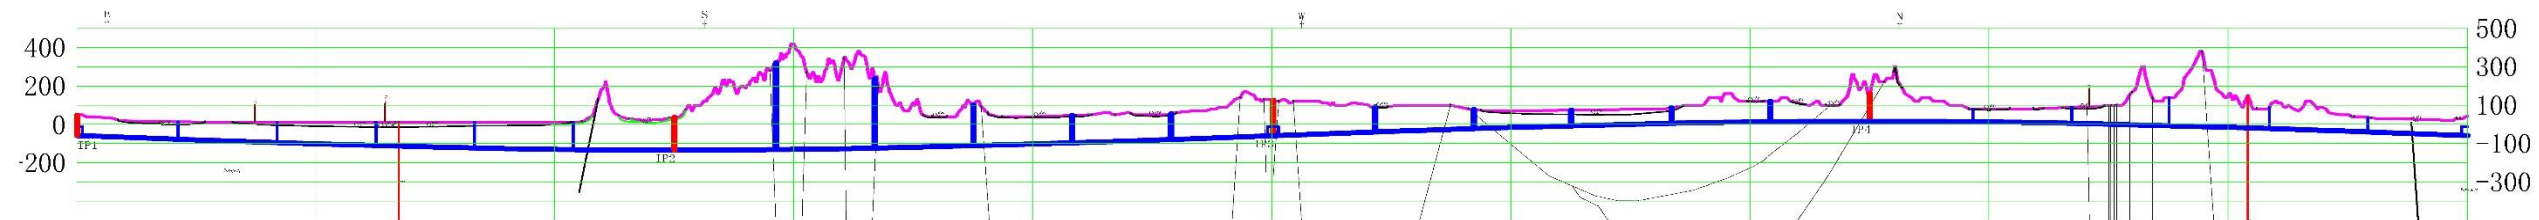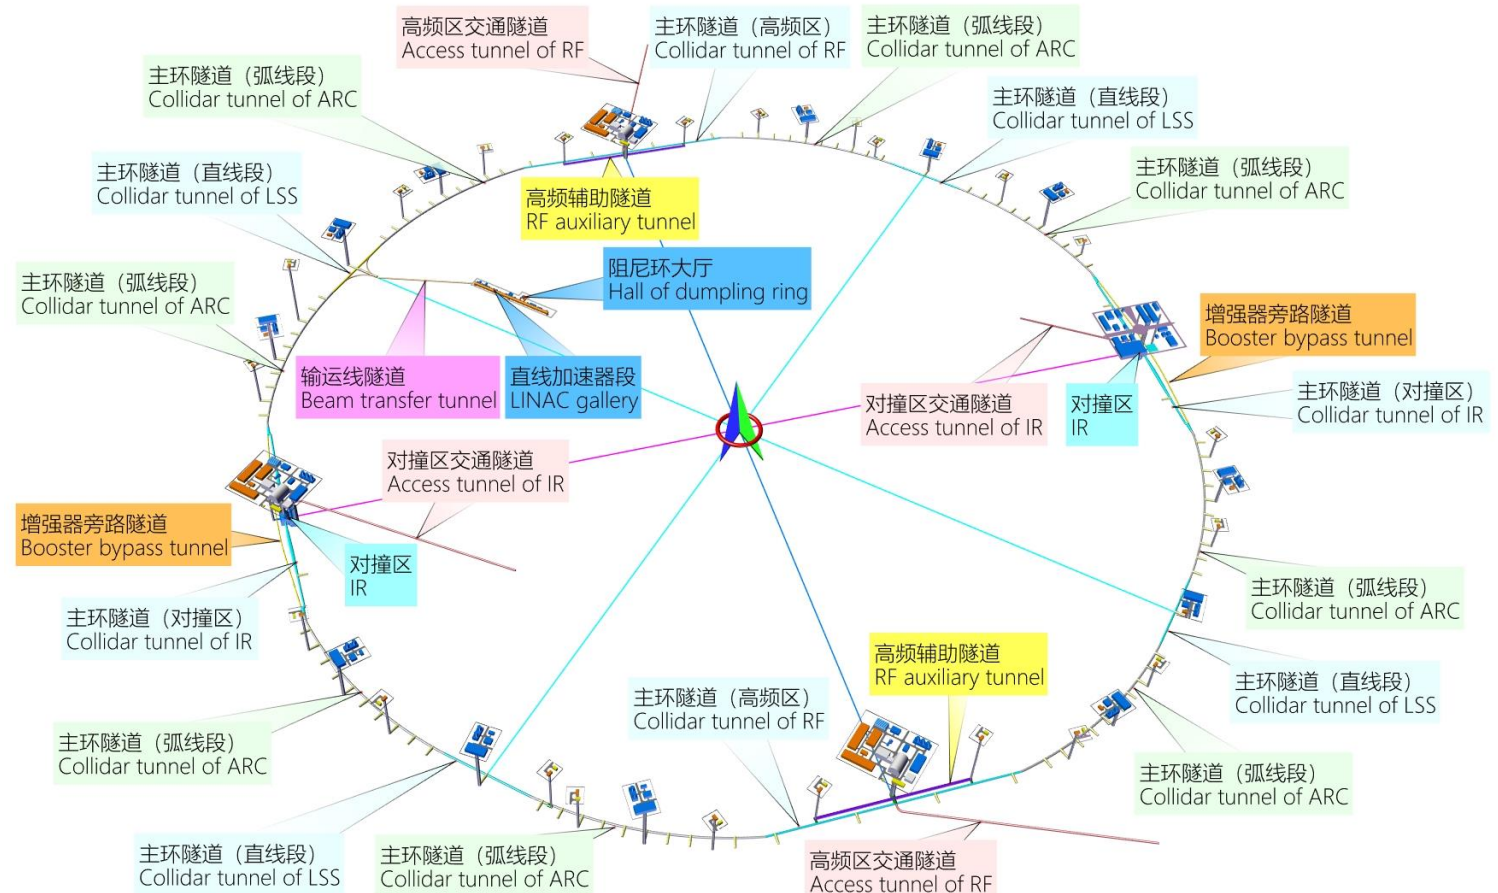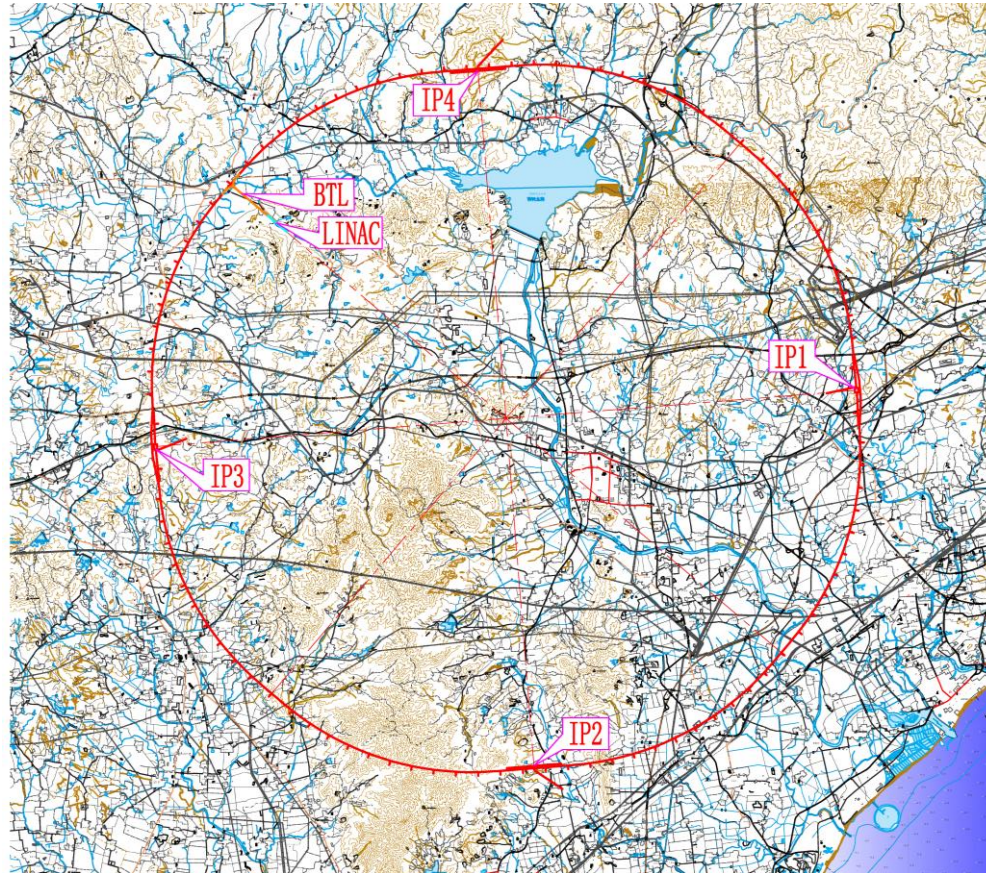

# 2 Civil Engineering


## 2.4 Project Layout

Preferred Option

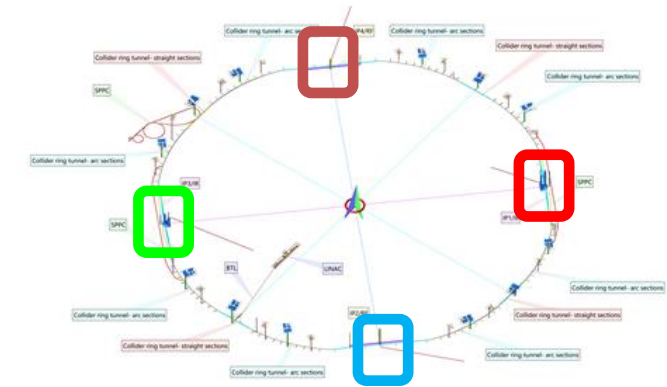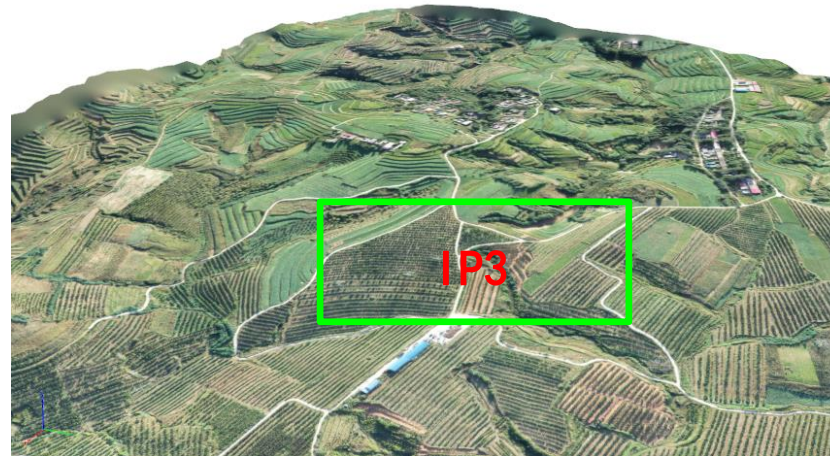


# 2 Civil Engineering


## 2.4 Project Layout

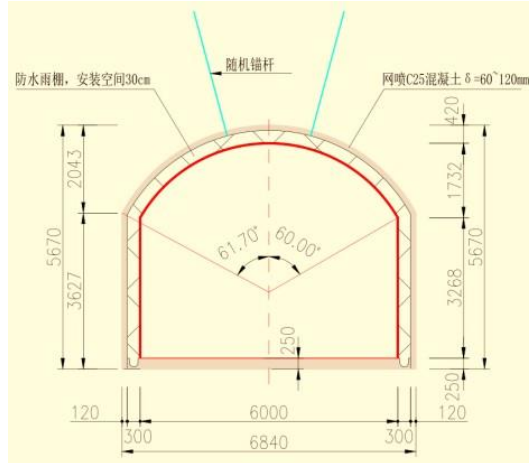

Drill-blast tunnel (6.0m×5.0m)

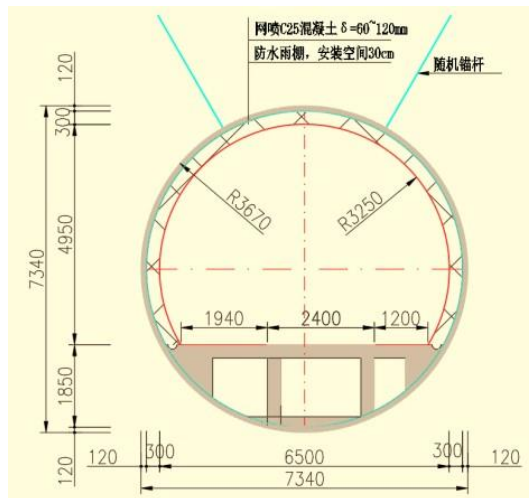

TBM tunnel (D6.5m)

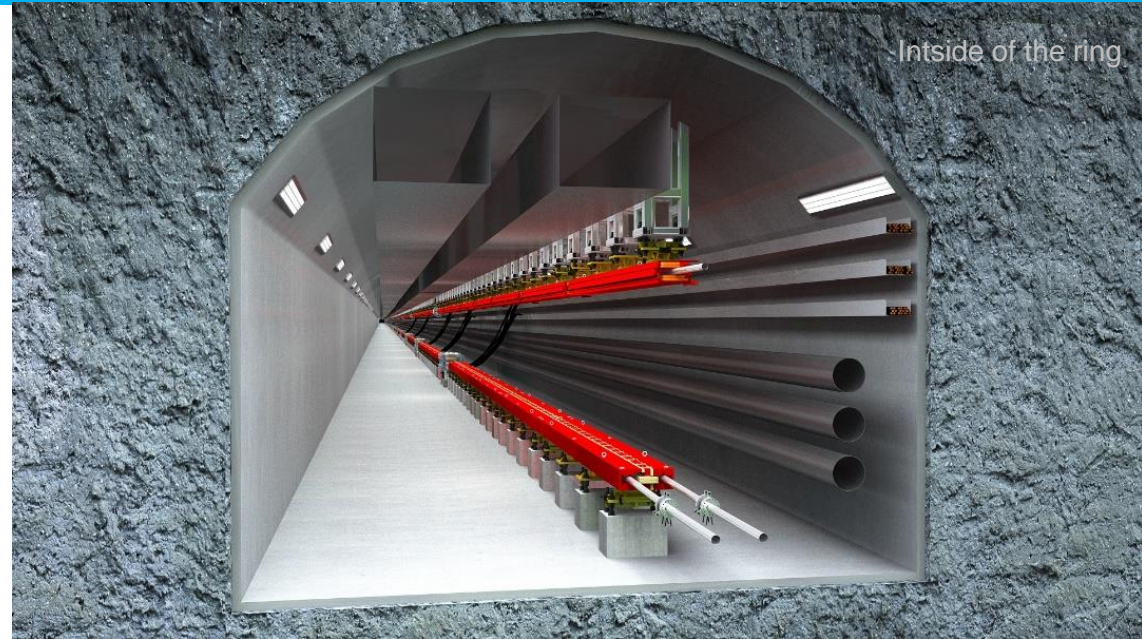

Typical cross section of collider tunnel

Both drilling & blasting and TBM are feasible. Construction periods of the two methods are similar, and overall cost of drilling & blasting is lower. With the continuous advancement of TBM technology, the cost of TBM equipment and operation are gradually reduced, while the labor cost of drilling & blasting method increases year by year. The advantages of TBM will be increasingly prominent for implementation of the project.


# 2 Civil Engineering

## 2.5 Equipment Layout


### Klystron Gallery



### Linac & BTL Tunnel

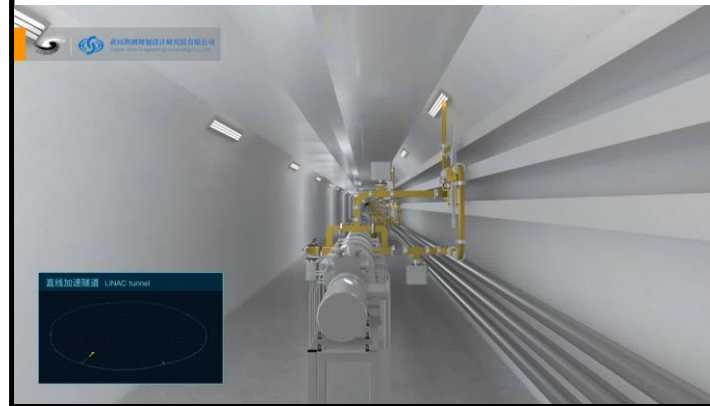


### Collider ring tunnel

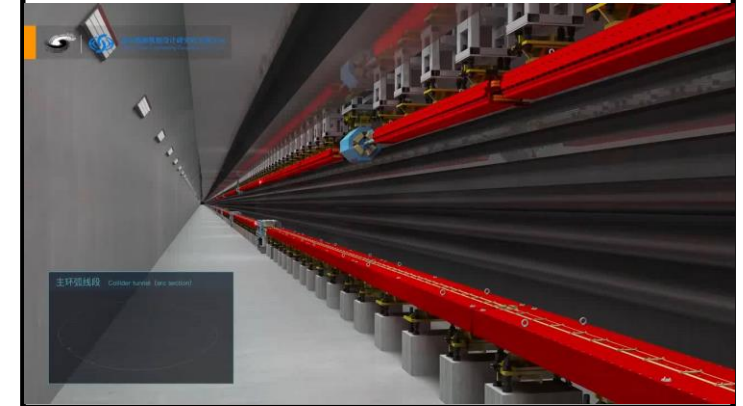


### Collider ring tunnel (RF)



### RF Auxiliary Tunnel

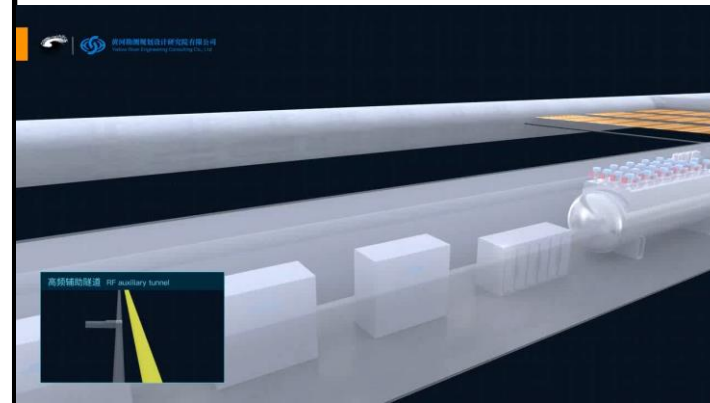

### IP1 / IP3

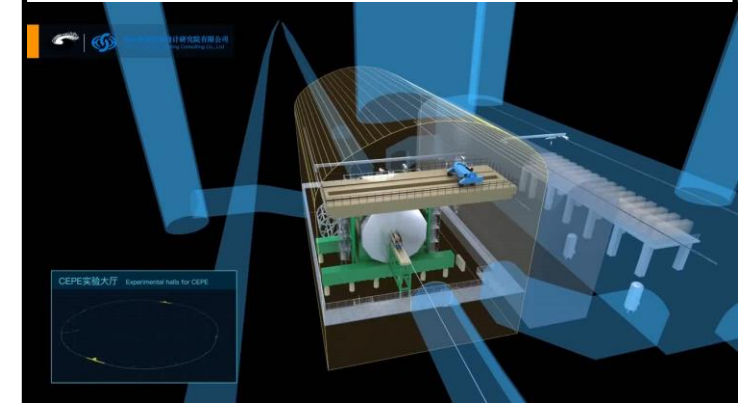

# 2 Civil Engineering

## 2.5 Equipment Layout








中国电建集团华东勘测设计研究院有限公司  
HUADONG ENGINEERING CORPORATION LIMITED




# 2 Civil Engineering

## 2.5 Equipment Layout

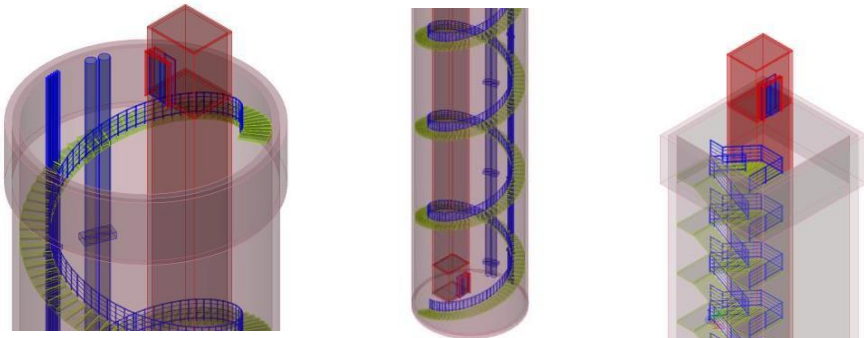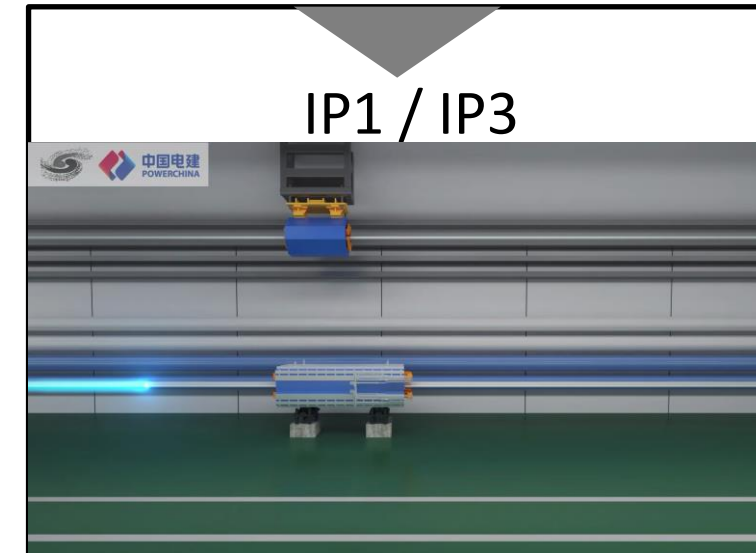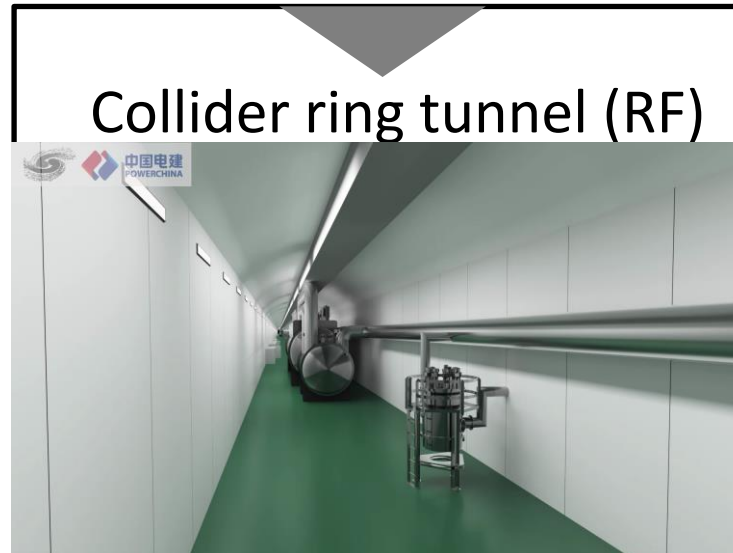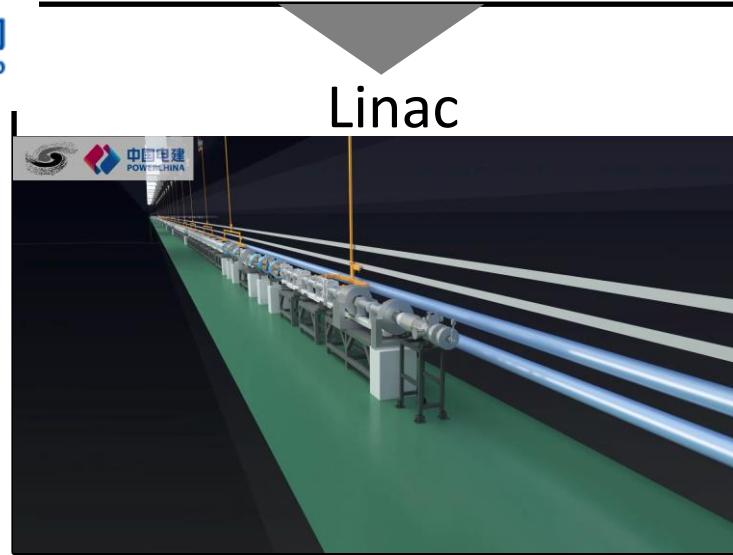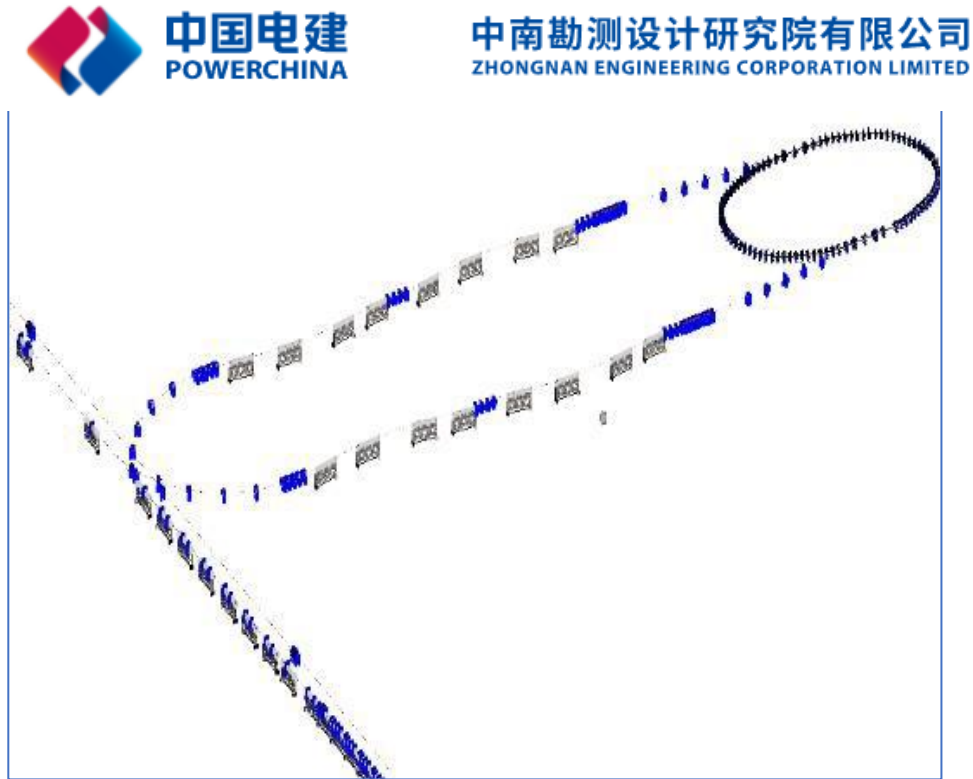


# 2 Civil Engineering

## 2.6 Surface Buildings

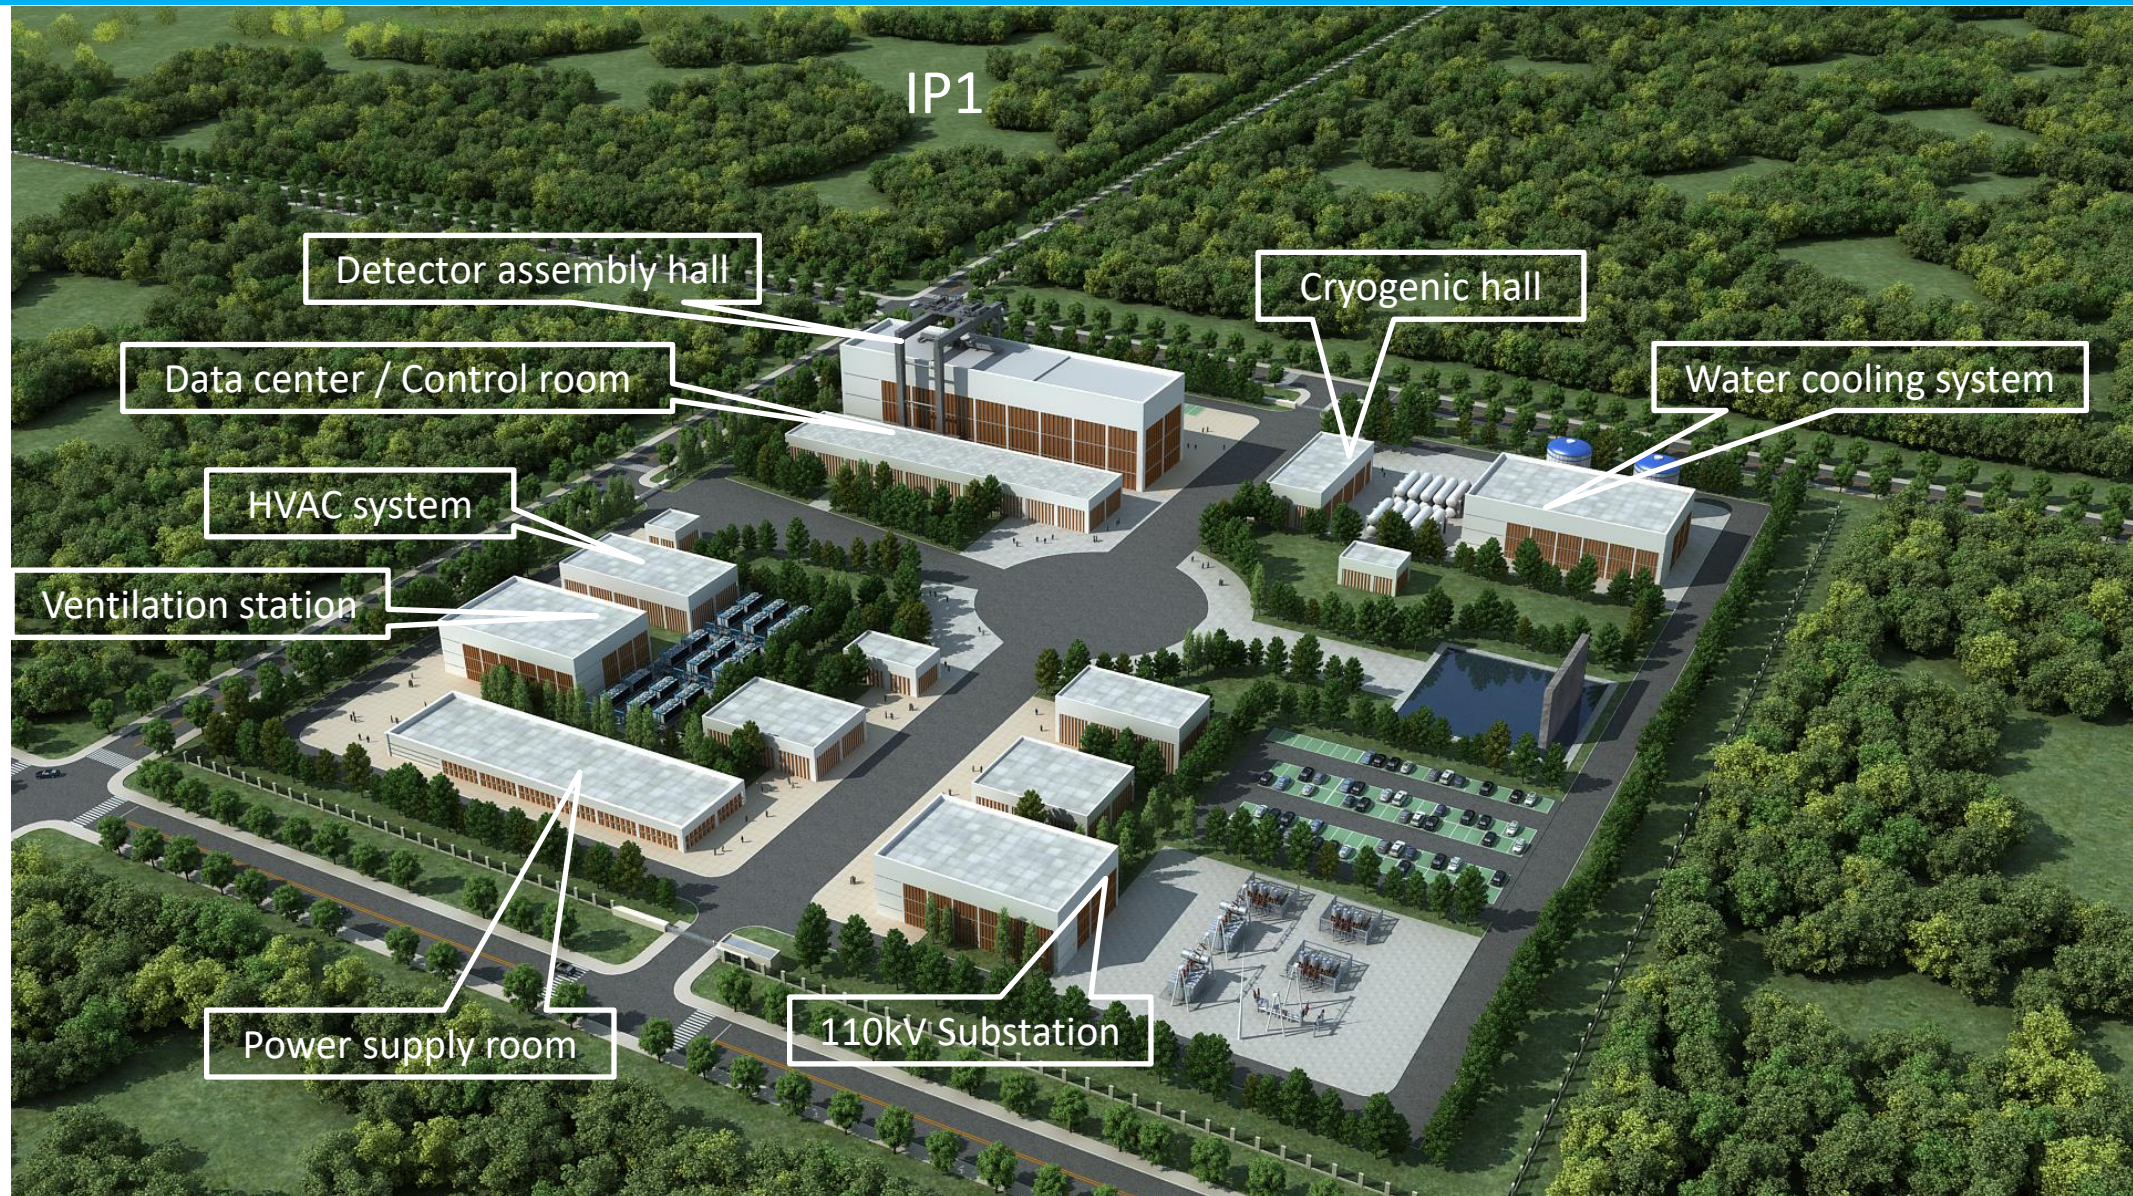

# 2 Civil Engineering

## 2.6 Surface Buildings


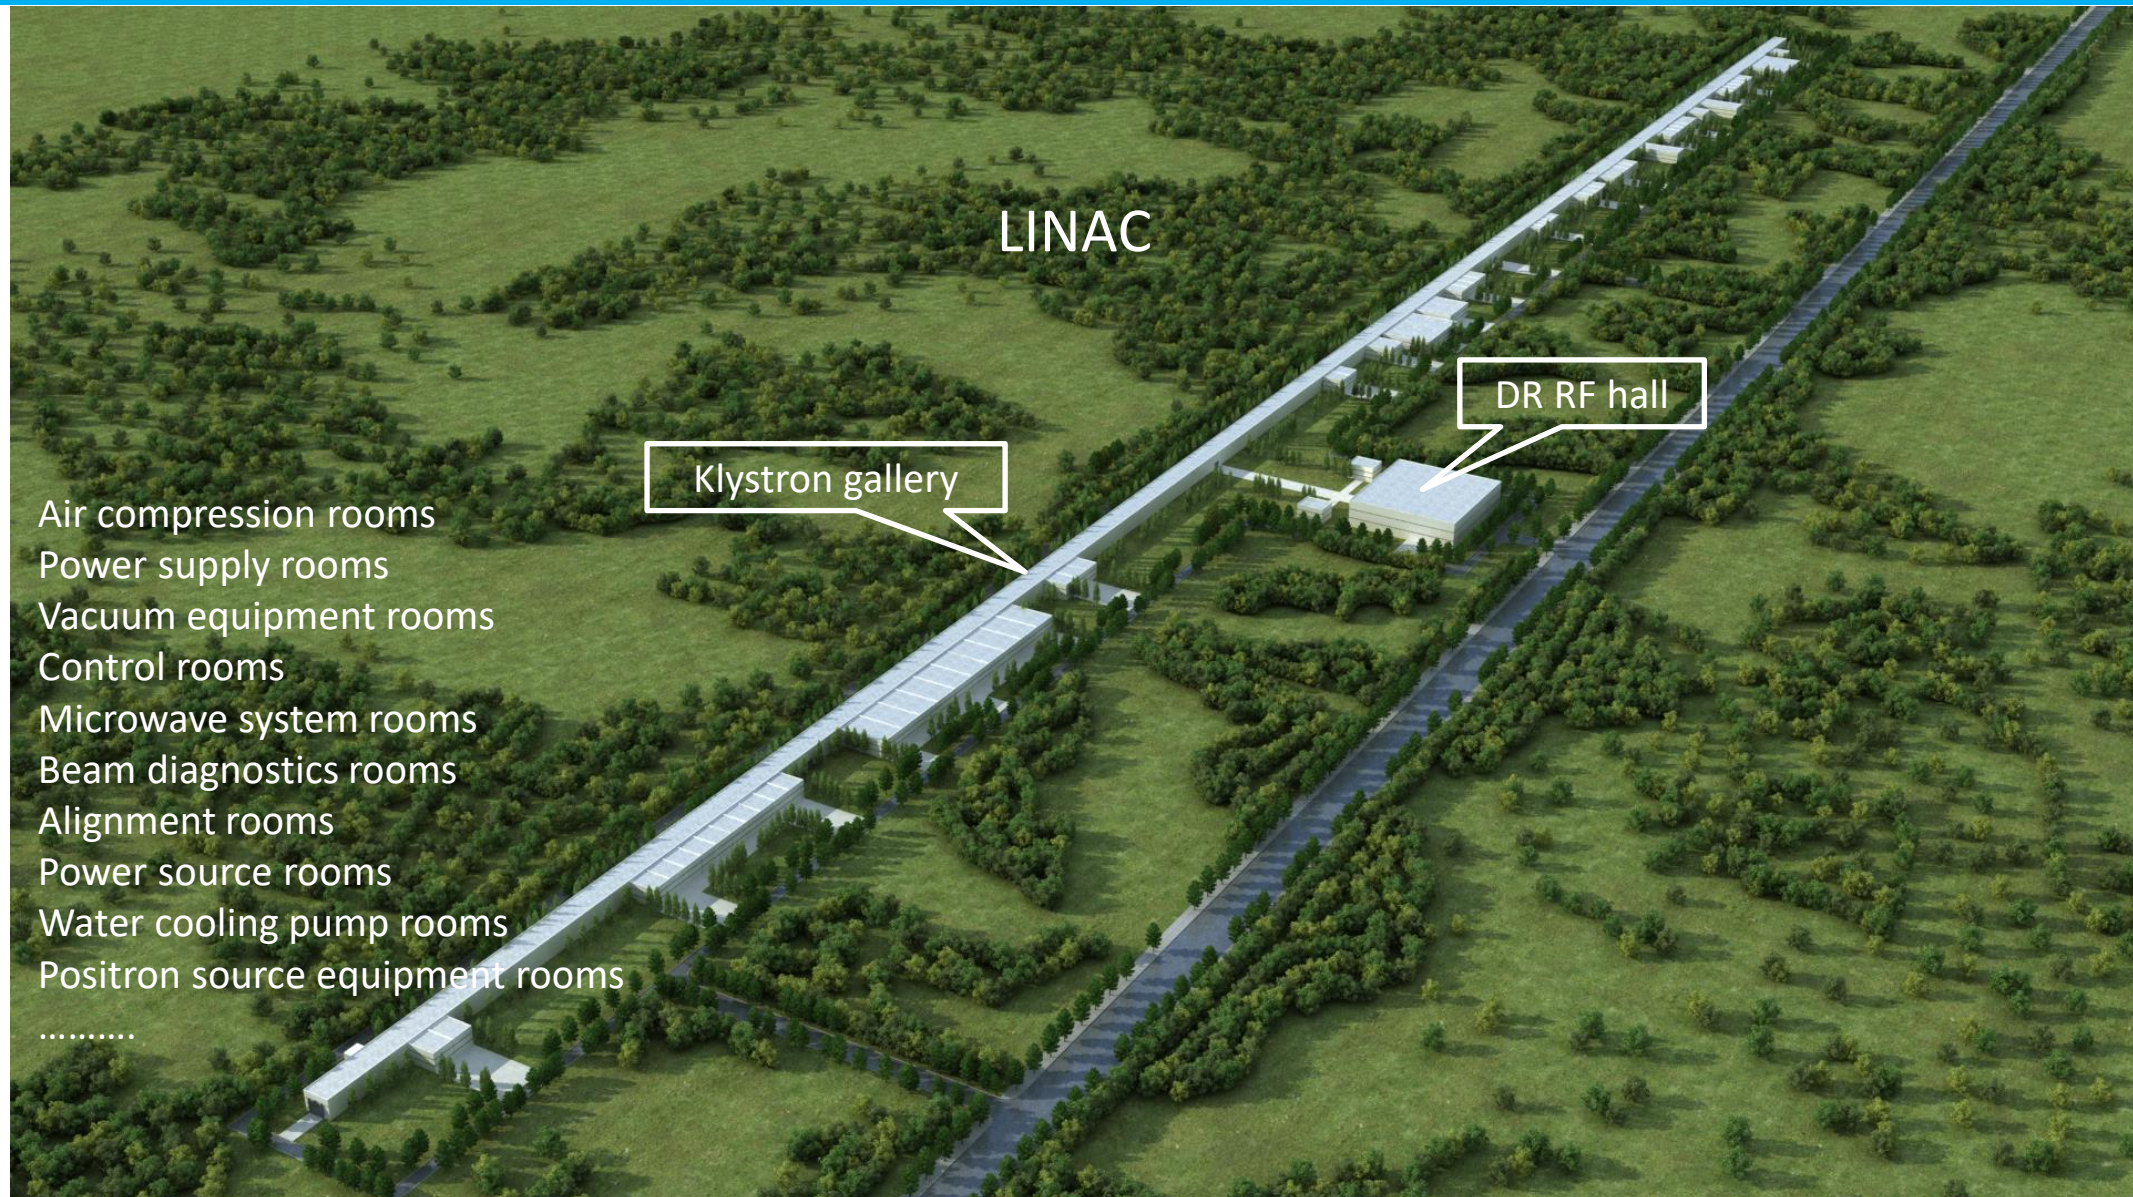


# 2 Civil Engineering

## 2.6 Surface Buildings




中南勘测设计研究院有限公司  
ZHONGNAN ENGINEERING CORPORATION LIMITED

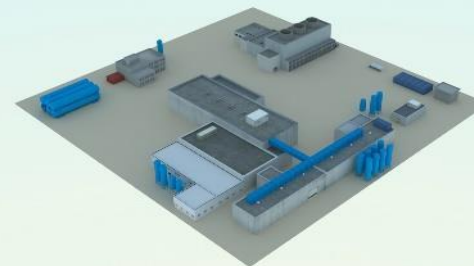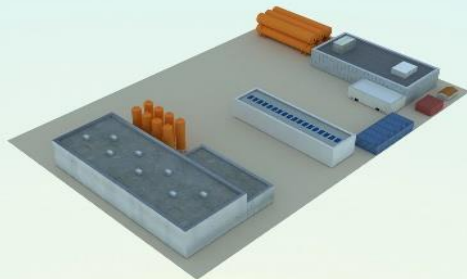

# 2 Civil Engineering

## 2.7 International Science City

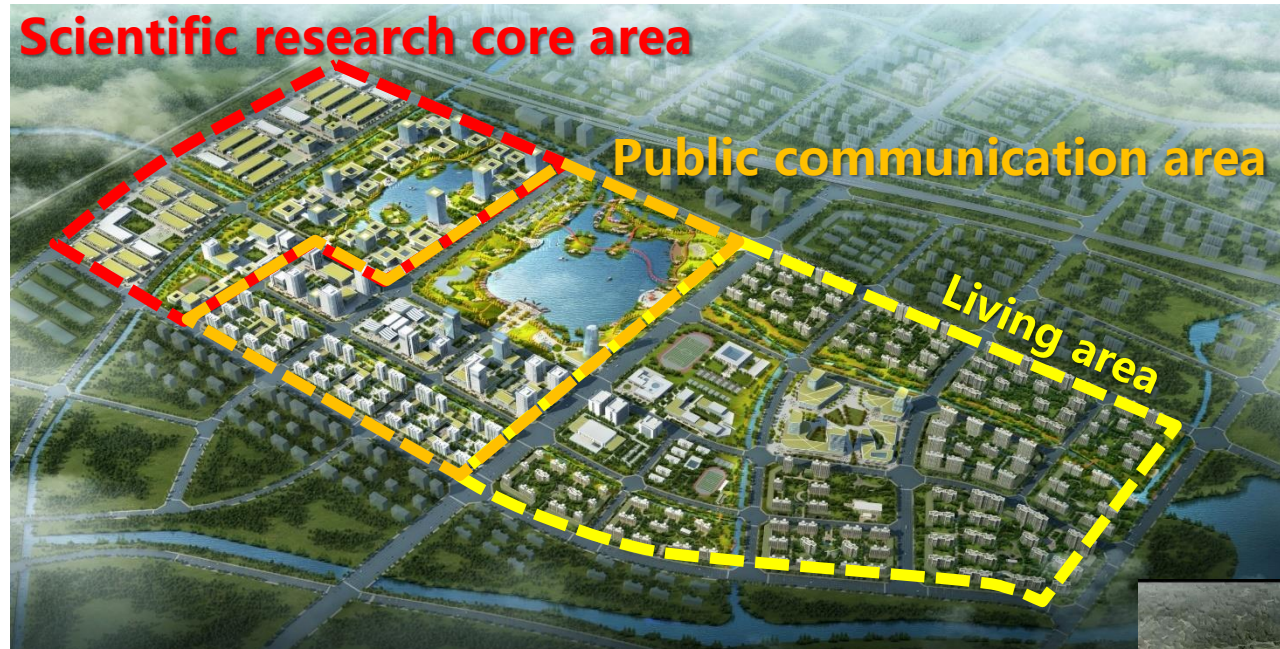

Huzhou



中国电建集团华东勘测设计研究院有限公司  
HUADONG ENGINEERING CORPORATION LIMITED



Changsha




中国电建  
POWERCHINA

中南勘测设计研究院有限公司  
ZHONGNAN ENGINEERING CORPORATION LIMITED




*04*

Summary

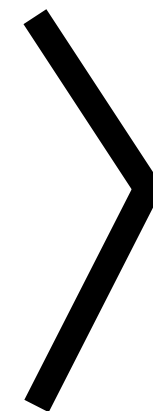

# 4 Summary

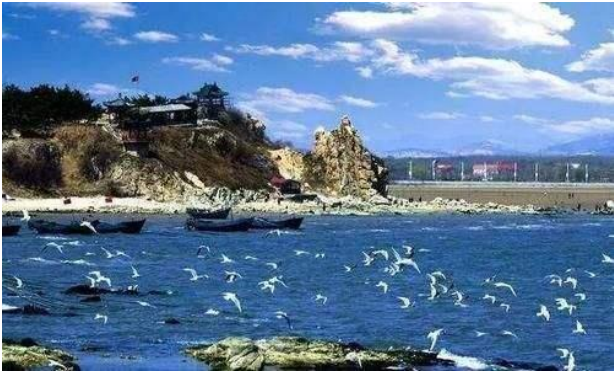

## Qinhuangdao

- Qinhuangdao is the “Summer Capital” in China famous for its coastal tourism, leisure and resort.
- Qinhuangdao site is in hilly area. The region is basically stable. There are no major geological problems.
- The site is suitable for the underground structures of such a large extent.

# 4 Summary




## Huzhou

- Based on the preliminary comprehensive analysis of multiple influencing factors, the CEPC site selection in Huzhou has no constraints and the conditions in Huzhou are superior.
- Relying on CEPC, research on digital solutions for collaborative management of multi-source and massive data has produced rich results with obvious spillover benefits.



# 4 Summary

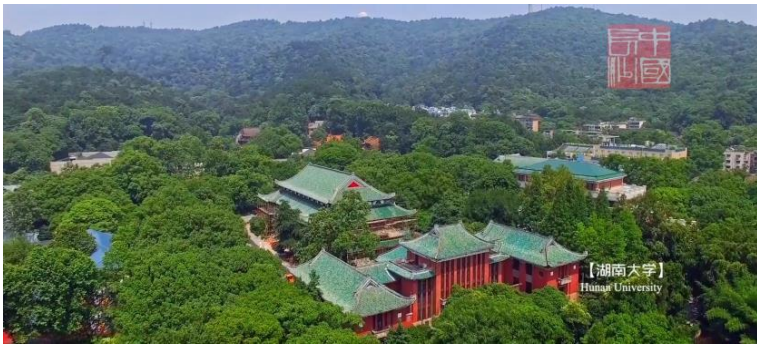

## Changsha

**Changsha site has completed the conceptual design of civil engineering and carried out the assembly and layout of some professional equipment. The main conclusions are as follows:**

- Hunan Province has superior geographical location, rich tourism resources and high degree of internationalization, which meets the requirements of CEPC civil engineering site selection.
- The main ring and hall are basically located in granite, with favorable terrain and geological conditions.
- The next step focuses on the tunnel support and waterproof forms which affect the civil engineering investment, and optimize the investment.

# 4 Summary



**All sites can satisfy requirements for CEPC construction.** The main geological problems encountered can be solved by engineering measures.



**Advance the civil engineering design as soon as possible.**

Decide the site

Complete the project proposal, feasibility study, preliminary design, and tender design before construction



Qinhuangdao

# THANK YOU FOR YOUR ATTENTION




Huzhou

 黄河勘测规划设计研究院有限公司  
Yellow River Engineering Consulting Co., Ltd.

 中国电建  
POWERCHINA 中国电建集团华东勘测设计研究院有限公司  
HUADONG ENGINEERING CORPORATION LIMITED

 中国电建  
POWERCHINA 中南勘测设计研究院有限公司  
ZHONGNAN ENGINEERING CORPORATION LIMITED

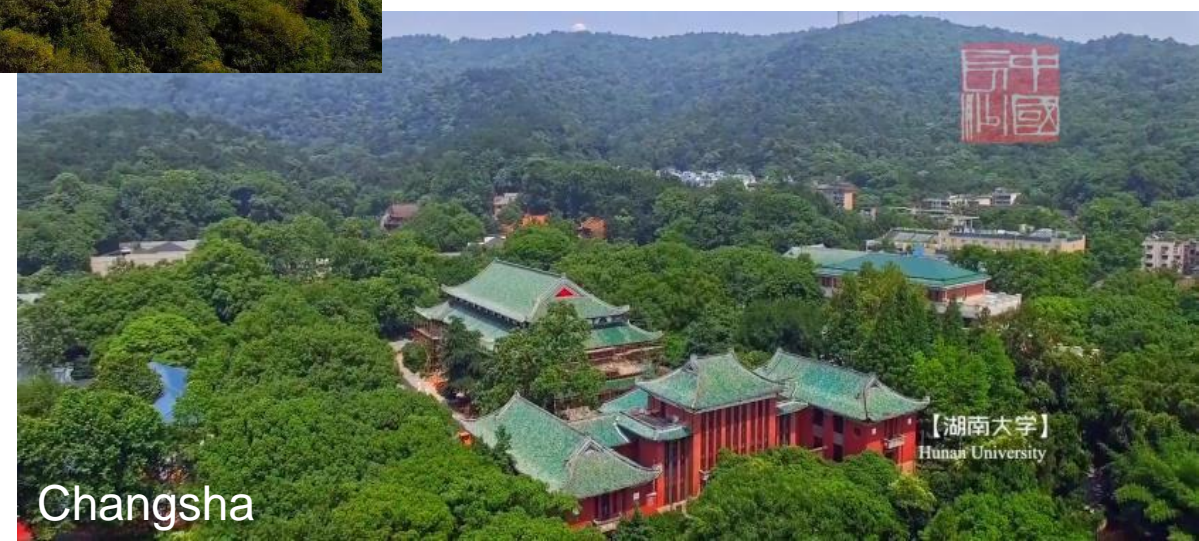

Changsha

【湖南大学】  
Hunan University