


Plastic scintillator ECAL and HCAL

Yunlong Zhang

University of Science and Technology of China



Requirements of CEPC Calorimeter

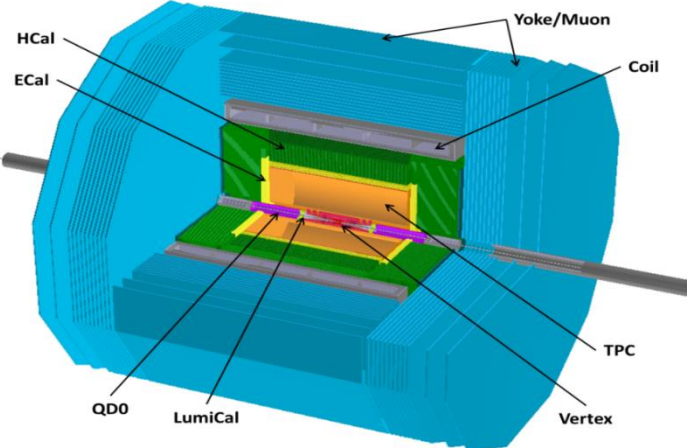


- **ILD-like detector with additional considerations.**

Challenges:

- **Momentum:** $\sigma_{1/p} < 5 \times 10^{-5} \text{ GeV}^{-1}$
- **Impact parameter:** $\sigma_{r\phi} = 5 \oplus 10 / (p \cdot \sin^2 \theta) \mu\text{m}$


➤ **Jet energy:** $\frac{\sigma_E}{E} \approx 3 - 4\%$

- The Particle Flow Algorithm (PFA) calorimeter concept was proposed
 - High granularity
 - Good track finding
 - Good energy resolution

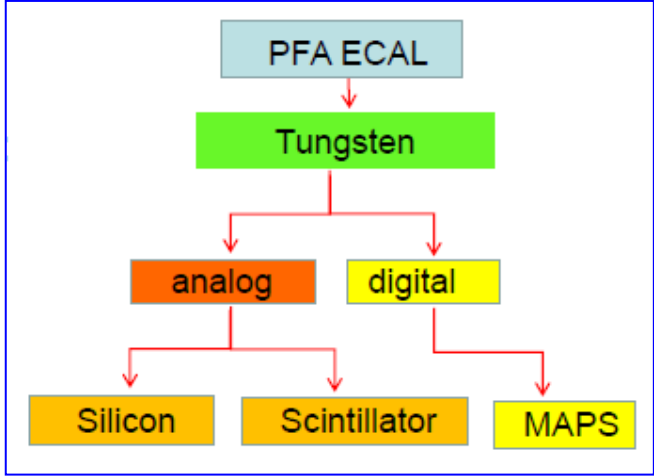


Sampling Calorimeter

Calo	Sampling No.	Sensitive detector	Absorber	Granularity	Electronics	Absorb length	Energy Resolution	weight
Sci-W ECAL	32	PSD+SiPM	W-Cu	5mm×5mm	SP-2E	22 X_0	16%@ 1 GeV	0.3 T
AHCAL	40	PSD+SiPM	Fe	40mm×40mm	SP-2E	4.6 NIL	60%@ 1 GeV	5.0 T

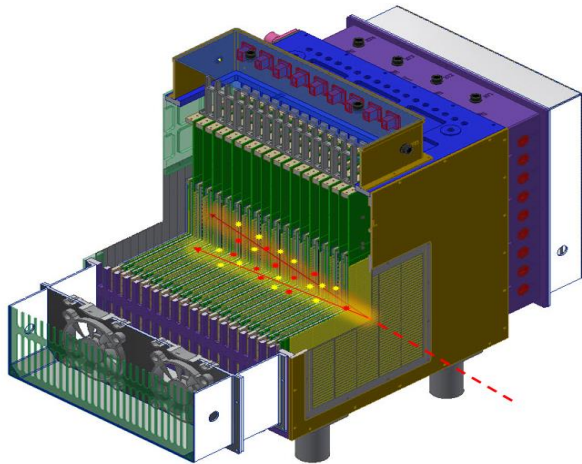

Sci-W ECAL


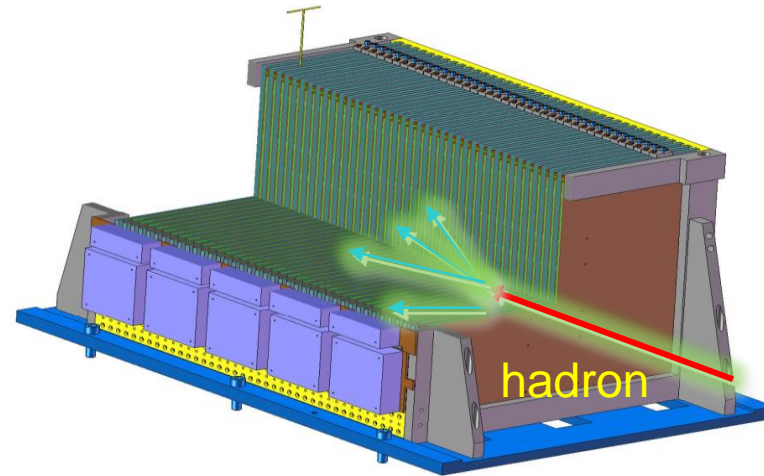


AHCAL






Sci-W ECAL

- Sci-W ECAL
 - 32 layers, 16 super-layers
 - 210 channels of each layer, total channels:6720
 - Sensitive area: $22\text{cm} \times 22\text{cm}$


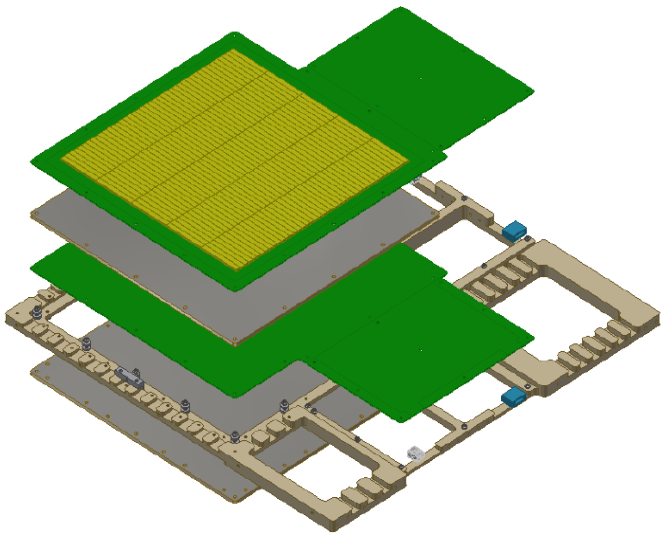
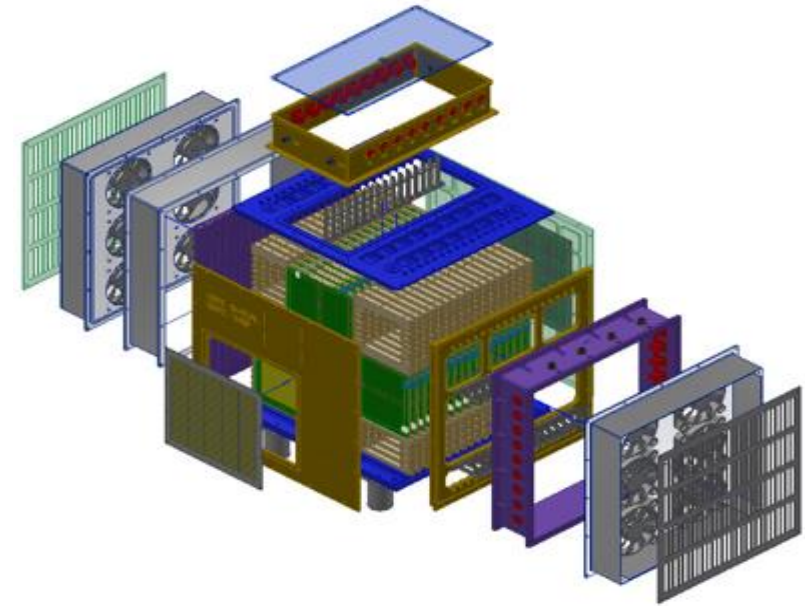


- ◆ 能量分辨率 16% @ 1 GeV
- ◆ BMR: 1.97% ($H \rightarrow \gamma\gamma$)

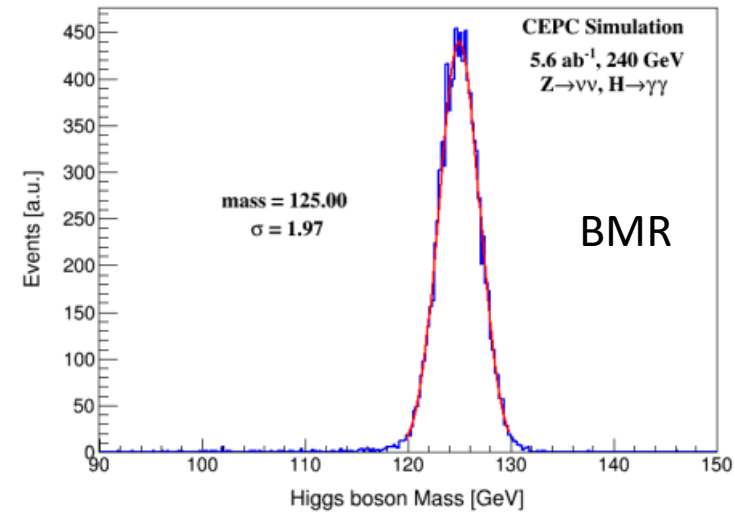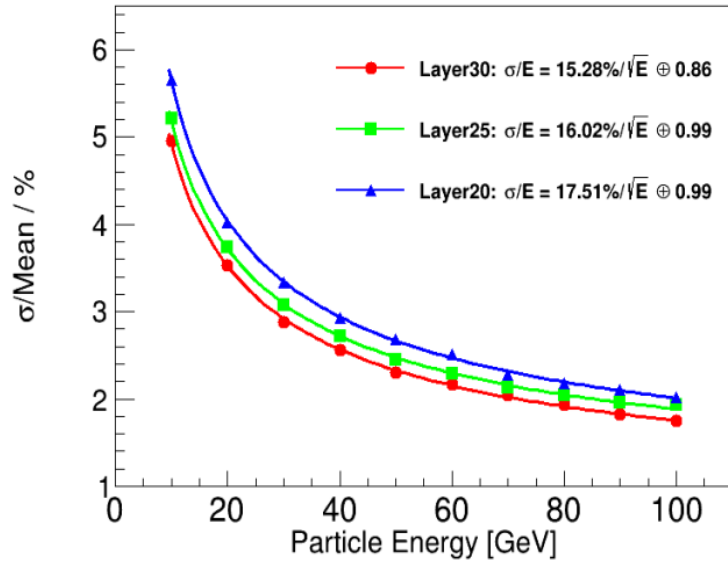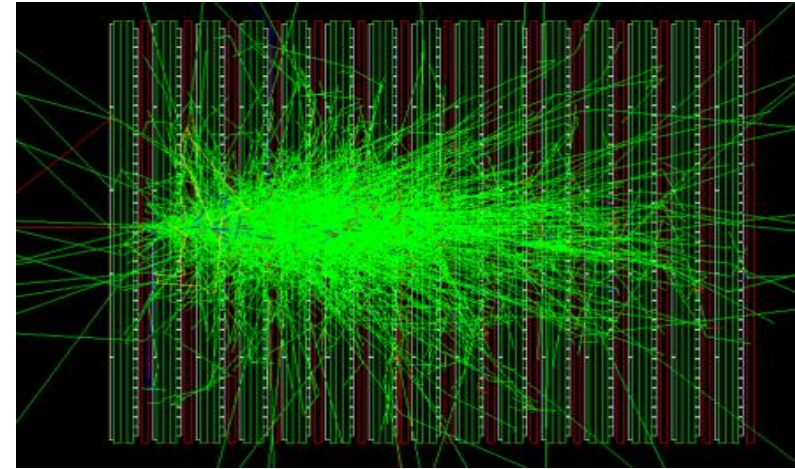





AHCAL

- ◆ The AHCAL was assembled this summer
 - ◆ 40 sensitive layers, and sensitive area is ~ 72 cm x 72 cm
 - ◆ Each layer has 324 sensitive cells
 - ◆ Total number is 12960

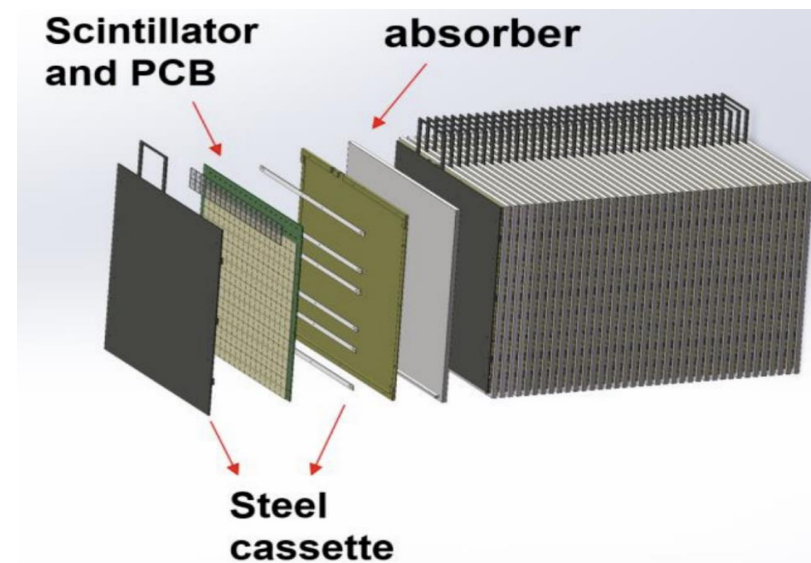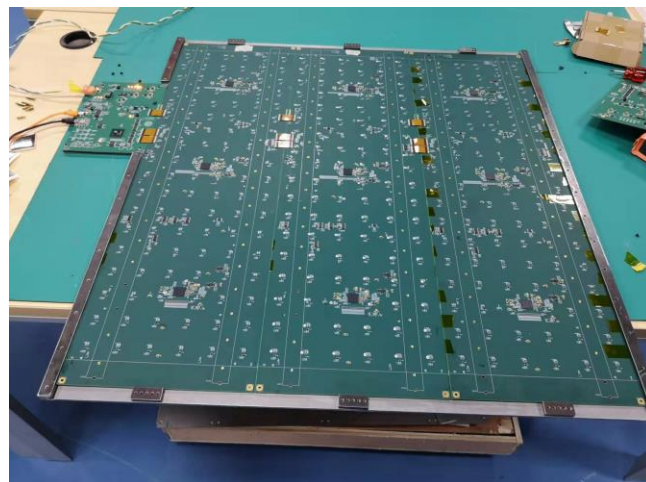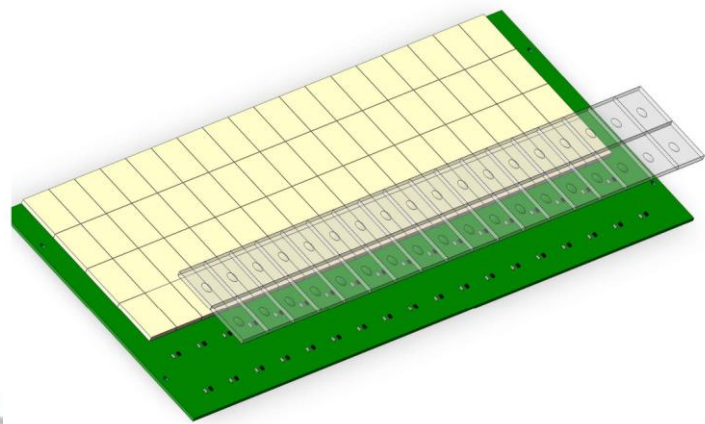


2024/3/7

- ◆ 能量线性优于1%
- ◆ 能量分辨率~48%@1 GeV
- ◆ BMR ~3.7% (H->gg)

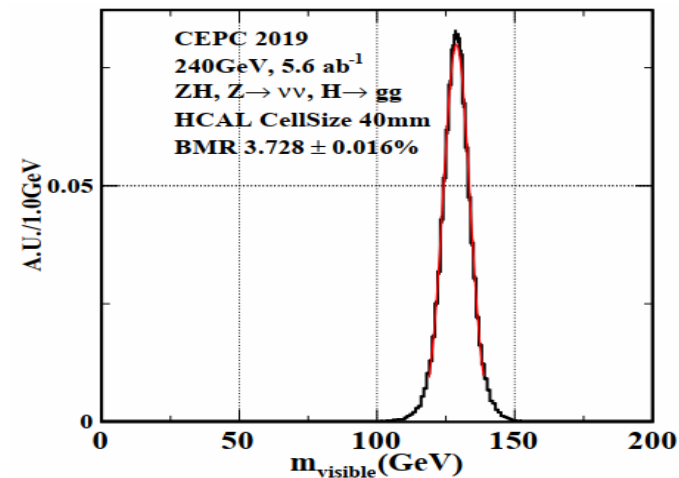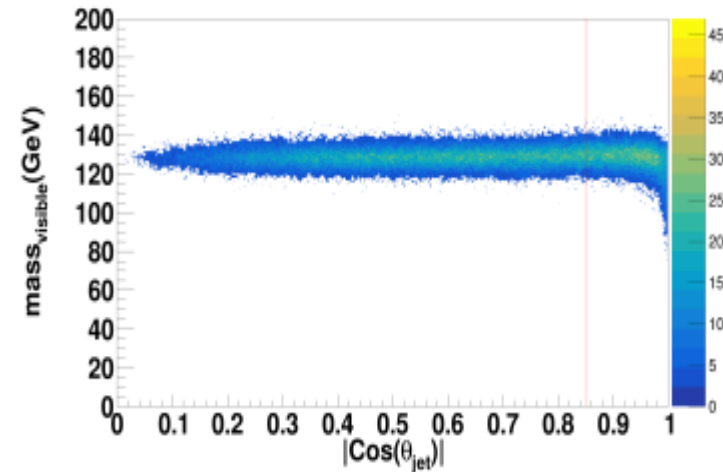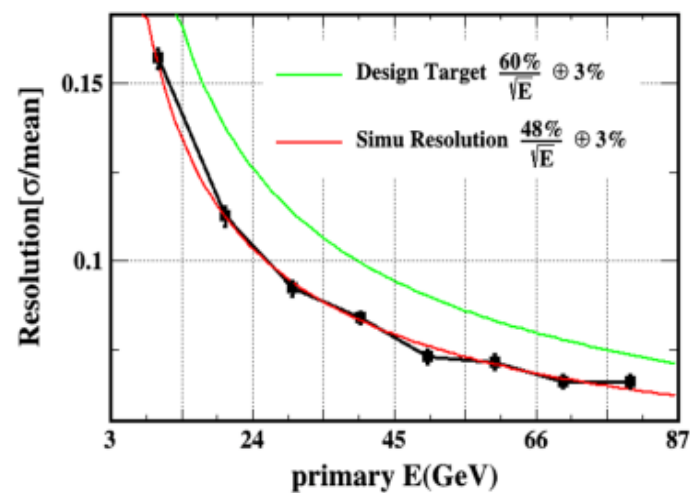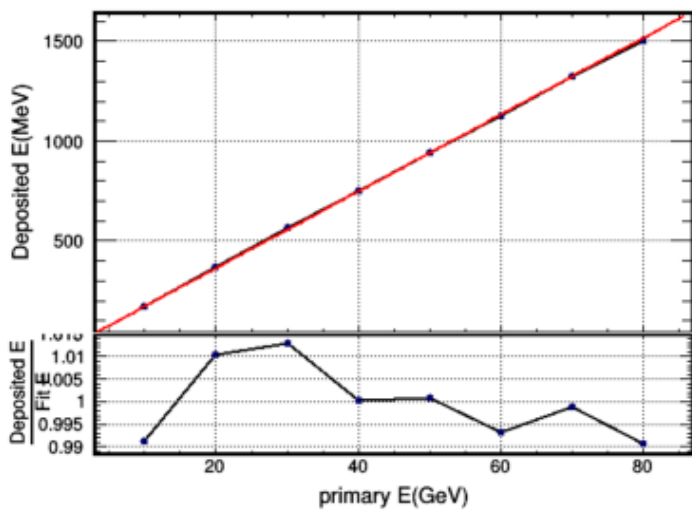

ECAL & AHCAL Beam Test


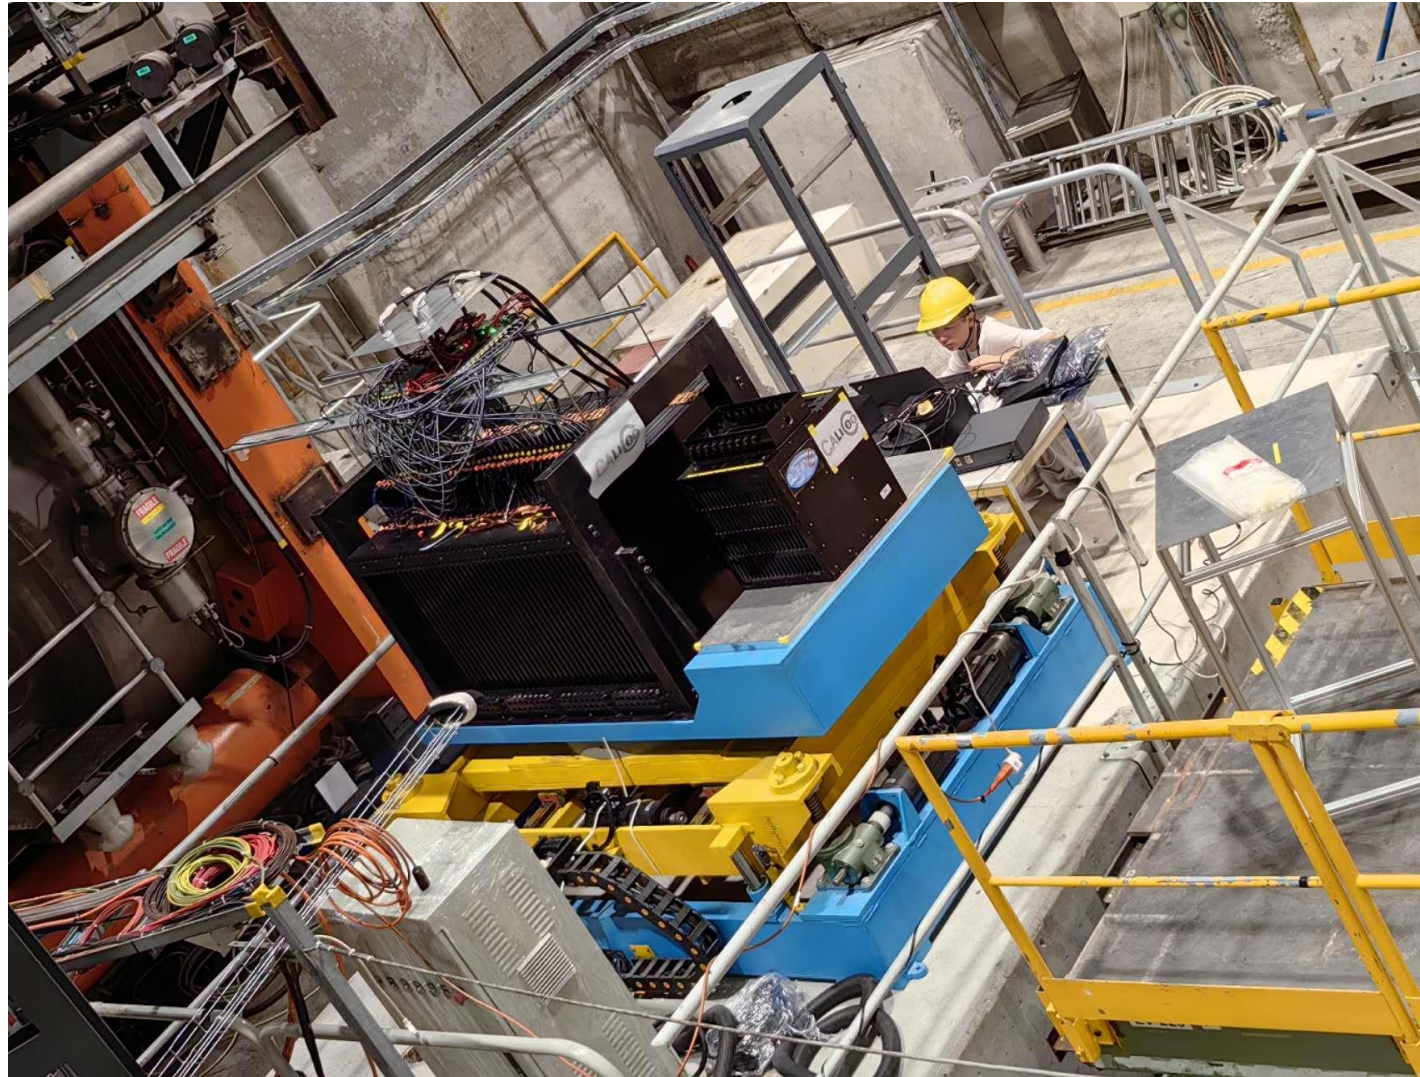


2024/3/7

ECAL & AHCAL Beam Test

- Energy linearity better than 2%
- Energy resolution is $\frac{57.6\%}{\sqrt{E}} \oplus 2.3\%$


10 – 80 GeV

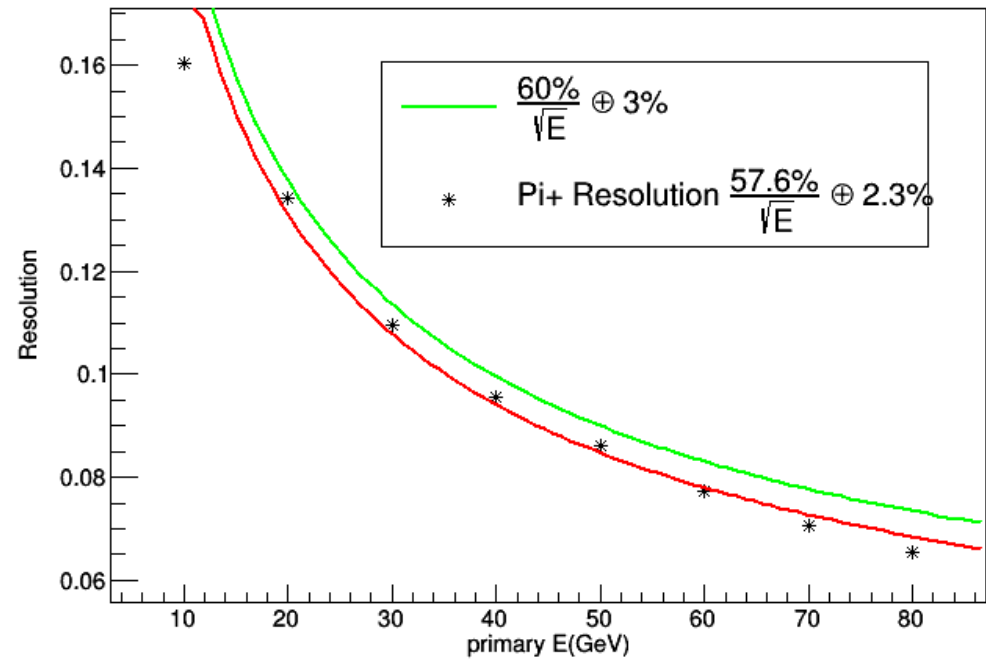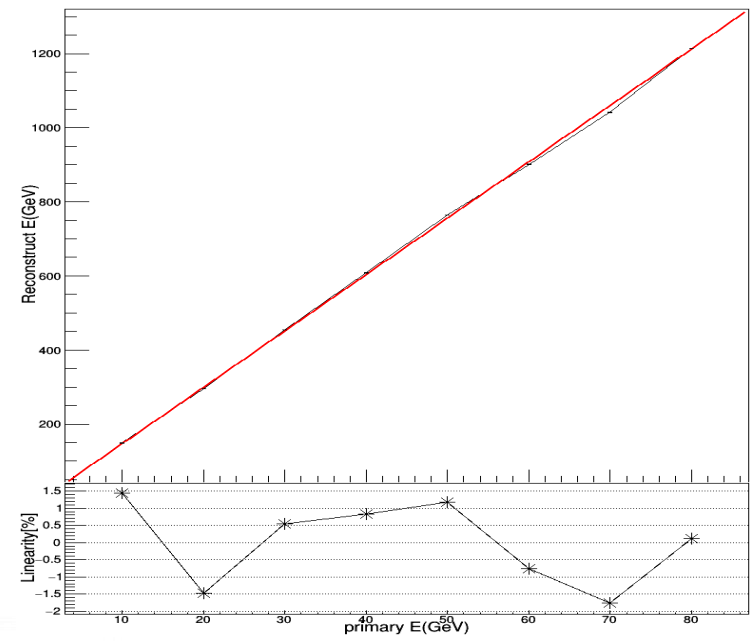

计算依据


ECAL Barrel Inner radius $R1 = 1.90\text{m}$, Outer radius $R2 = 2.14\text{m}$, length $L = 6.1\text{m}$, $N_{\text{layers}} = 30$ Area of Barrel = $2 * \text{PI} * [(R1+R2)/2] * L * N_{\text{Layer}} = 2323 \text{ m}^2$

ECAL Endcap Inner radius $r1 = 0.35\text{m}$, Outer radius $r2 = 2.14\text{m}$, $N_{\text{layers}} = 30$ Area of Endcap = $2 * \text{PI} * (r2 * r2 - r1 * r1) * N_{\text{Layer}} = 840 \text{ m}^2$

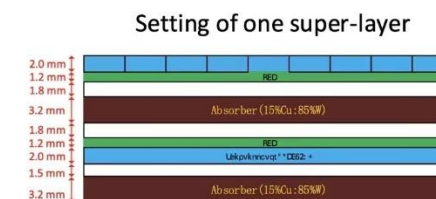

HCAL Barrel Inner radius $R1 = 2.19 \text{ m}$, Outer radius $R2 = 3.68\text{m}$, length $L = 6.34\text{m}$, $N_{\text{layers}} = 48$, Area of Barrel = $2 * \text{PI} * [(R1+R2)/2] * L * N_{\text{Layer}} = 5609.2 \text{ m}^2$

HCAL Endcap Inner radius $r1 = 0.35\text{m}$, Outer radius $r2 = 3.68\text{m}$, $N_{\text{layers}} = 48$, Area of Endcap = $2 * \text{PI} * (r2 * r2 - r1 * r1) * N_{\text{Layer}} = 4045.3 \text{ m}^2$

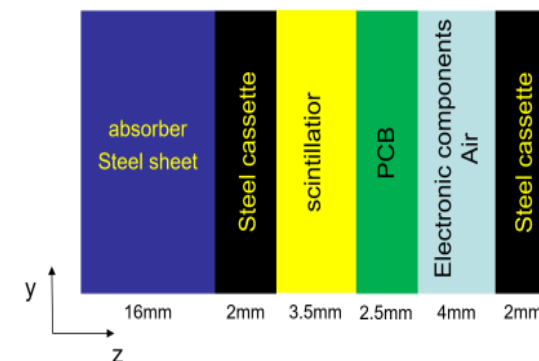

Performance Summary

Items	Priority	Results / Status		Remarks
Boson Mass Resolution	A	1.97% (H->γγ) 3.73% (vvH->vvgg)		BMR < 4%
Intrinsic EM/hadronic energy resolution	A	15.3% / \sqrt{E} \oplus 0.9% ; 48% / \sqrt{E} \oplus 3%	57.6% / \sqrt{E} \oplus 2.3%	
Separation power				gamma/gamma, gamma/hadron, hadron/hadron
Lepton ID in jets				
Timing capability				
π^0 reconstruction				
Pile-up at Z-pole				

- Priority/importance for performance requirements: (A) must-have; (B) plus; (C) not essential

ECAL Cost Summary

Parameter Name	Barrel	Endcaps (x2)	Sum
Inner Radius for ECAL	1900 mm	400 mm	NA
Length for barrel; Outer radius for endcap	6100 mm	1900 mm + $24X_0$; 2140 mm	NA
Longitudinal Depth	$24X_0$ (Thickness depends on each option)		NA
Modularity	#modules in phi, #rings along Z	Assuming ideal geometry if no design?	NA
Material Volume (m ³)	6.5	2.4	8.9m ³ \$21 M
Readout channels	2.323e7	0.84e7	3.163e7
Power dissipation (kW)	162.6	58.8	221.4
Cost: sensitive materials (Yuan)	2.555e8	0.924e8	\$49M
Cost: electronics	2.323e8	0.84e8	\$42M
Total Cost			\$112M->RMB 0.81 B

Please also consider to indicate in extra or supporting materials

- Unit cost for key components and materials
- References for unit cost or estimates
- Uncertainty or risks if applicable

闪烁体: 1元/channel
SiPM:10元/片
Ele: 10元/channel

AHCAL Cost Summary

Parameter Name	Barrel	Endcaps (x2)	Sum
Inner Radius for HCAL	1900 mm + $24X_0$	400 mm	NA
Length for barrel; Outer radius for endcap*	6100 mm -> 6340mm	1900 mm + $24X_0 + 6\lambda_I$ 2190mm, 3680mm	NA
Longitudinal Depth	$6\lambda_I$ (Thickness depends on each option)		NA
Modularity	#modules in phi, #rings along Z	Assuming any ideal geometry if no design?	NA
Material Volume (m ³)	112.2	80.9	193.1m ³ \$4.2M
Readout channels	3.51e6	2.53e6	6.04e6
Power dissipation (kW)	24.6	17.7	42.3
Cost: sensitive materials(Yuan)	7.02e7	5.06e7	\$16.8M
Cost: electronics	3.51e7	2.53e7	\$8.4M
Total Cost			\$29.4M- >RMB212M

* Endcaps encompass barrel

Please also consider to indicate in extra or supporting materials

- Unit cost for key components and materials
- References for unit cost or estimates
- Uncertainty or risks if applicable

闪烁体: 10元/channel

SiPM: 10元/片

Ele: 10元/channel

Technical readiness level

- Status and plans of simulation studies and R&D (a table template)
- Person power

Category	Status	Design 1	Other Alternative Design (if any)
Technical Readiness Level	Full Simulation (system level)		
	Full Simulation (module level)		
	Prototyping R&D (common)		
	Prototyping R&D (modules, units)		



2024/3/7

ECAL and AHCAL

- ECAL (Scintillator + SiPM, Barrel 2323 + Endcap 840 = 3163 m²)
 - P(inside layer) ~ 3.163×10^7 (channels) * 7mW/ch(SPIROC) = 221.4 kW (full load)
 - P(interface) ~ 9W /DIF/m² * 3163m² = 28.5 kW
 - P(total) ~ 250 kW

- AHCAL (Scintillator + SiPM, Barrel 5609.2 + Endcap 4045.3 = 9654.5m²)
 - P(inside layer) ~ 6.0341×10^6 (channels) * 7mW/ch (SPIROC) = 42.24 kW
 - P(interface) ~ 9W /DIF/m² * 9654.5m² = 86.9 kW
 - P(total) ~ 129.14 kW



2024/3/1