


A 3D architectural rendering of the CEPC tunnel, showing a large circular structure with multiple vertical support pillars, set against a landscape background with mountains and a blue sky.

# CEPC TDAQ and Online

Fei Li

On behalf of CEPC TDAQ Group



中國科學院高能物理研究所  
*Institute of High Energy Physics*  
*Chinese Academy of Sciences*

# Content

- **Introduction**
- **Requirements**
- **Technology survey and our choices**
- **Technical challenges**
- **Previous experience on large facilities**
- **R&D efforts and results**
- **Detailed design**
- **Research team and working plan**
- **Summary**

# Introduction

- This talk is about the design and development of the TDAQ and online
- This talk relates to the Ref-TDR Ch 12.
- Questions for physics and simulation
  - What kind of events need to be saved?
  - How to identify these events?
  - Background level?
- Questions for each detectors and electronics
  - Raw data readout bandwidth?
  - How much latency is acceptable?
  - What trigger primitives can be provided?
  - Noise level itself?
  - Control and monitoring requirements?

## Chapter 12 TDAQ and online

12.1	Introduction	.....
12.2	Requirements and Design Considerations	.....
12.2.1	Requirements	.....
12.2.2	Event rate & background rate estimation	....
12.2.3	Technology survey	.....
12.2.4	TDAQ policy consideration	.....
12.2.5	TDAQ Interface with electronics	.....
12.3	Trigger Simulation and Algorithms	.....
12.4	Hardware Trigger	.....
12.4.1	Previous experience on large facilities	.....
12.4.2	System architecture	.....
12.4.3	Common Trigger Board	.....
12.4.4	Trigger Control and Distribution	.....
12.4.5	Resource cost estimation	.....
12.5	Software and High Level Trigger	.....
12.6	Data Acquisition System	.....
12.6.1	Previous experience on large facilities	.....
12.6.2	Overview of System Functionality	.....
12.6.3	Detector Readout	.....
12.6.4	Dataflow	.....
12.6.5	Network	.....
12.6.6	Online Software	.....
12.7	Detector Control System	.....
12.8	Experiment Control System	.....
12.9	Summary	.....

# Requirements: Physical Event Rate

## ■ 8 Hz @ Higgs 240GeV(50MW)

- Bunch crossing rate: 2.889 MHz
- Higgs:  $\sim 0.02$ Hz

## ■ 82 kHz @ Z pole 91GeV(50MW)


- Bunch crossing rate: 43.3 MHz

## ■ Physical event rates are sufficiently low relative to the bunch crossing rate.

## ■ Keep physical events as more as possible

- Through a rough selection of the relevant objects (jet, e, muon, tau,  $\nu$ , ...) and their combinations.
- Detailed signal feature extraction and simulation studies are required.

	Higgs	Z	W	$t\bar{t}$
SR power per beam (MW)	50			
Bunch number	446	13104	2162	58
Bunch spacing (ns)	346.2 ( $\times 15$ )	23.1 ( $\times 1$ )	138.5 ( $\times 6$ )	2700.0 ( $\times 117$ )
Train gap (%)	54	9	10	53
Luminosity per IP ( $10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ )	8.3	192	26.7	0.8

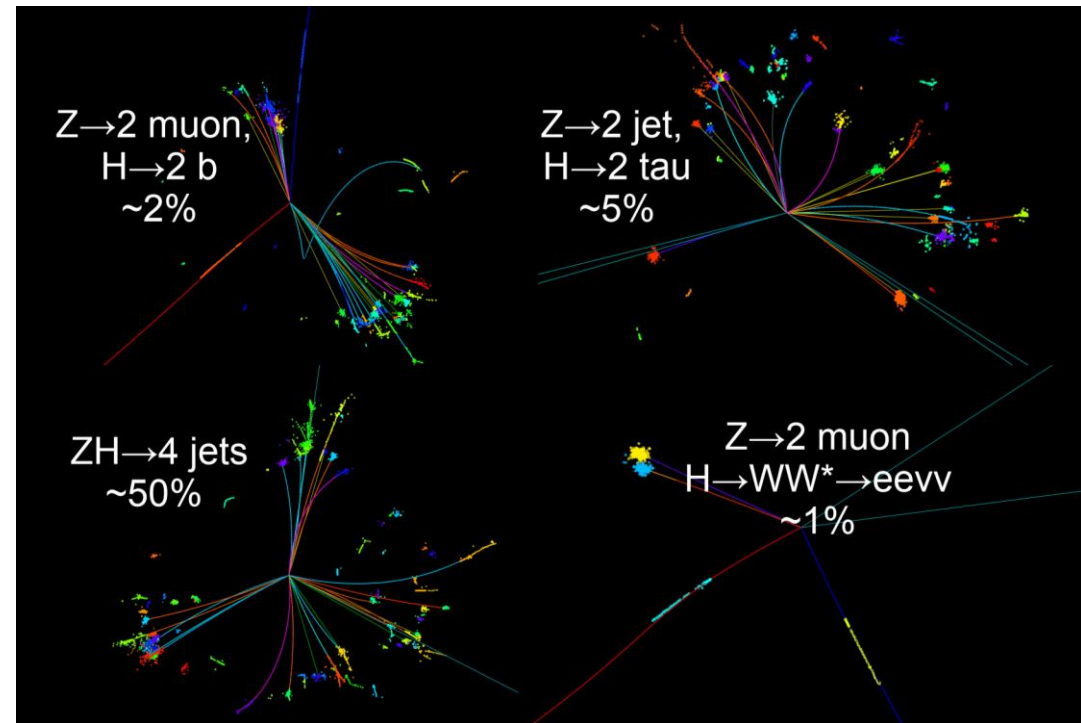

# Requirements: Data Rate

## Data rate before trigger

- < 1 TB/s @ Higgs
- Several TB/s @ Z

## Event size < 2 MB

- Related to occupancy and read out window

## L1 trigger rate

- O(1k) Hz @ Higgs
- O(100k) Hz @ Z

## Storage rate after HLT

- <100 Hz (200 MB/s) @ Higgs
- 100 kHz (200 GB/s) @ Z


	Vertex	Pix(ITKB)	Strip (ITKE)	OTKB	OTKE	TPC	ECAL-B	ECAL-E	HCAL-B	HCAL-E	Muon
Channels per chip	512*1024	512*128	1024	128		128	8~16				
Data Width /hit	32bit	42bit	32bit	48bit		48bit	48bit				
Max Data rate / chip	2Gbps/chip	Avg. 3.53Mbps/chip	Avg. 21.5Mbps/chip	Avg: 2.9Mbps/chip	Avg: 38.8Mbps/chip	~70Mbps/module Inmost	~9.6Gbps/module @dual-end readout	Needs bkgd rate	Needs bkgd rate	Needs bkgd rate	Needs bkgd rate
Detector Channel/module	1882 chips @Stch &Ladder	30,856 chips 2204 modules	23008 chips 1696 modules	83160 chips 3780 modules	11520 chips 720 modules	492 Module	0.96M chn ~60000 chips 480 modules	Needs detector finalization	3.38M chn 5536 aggregation board	2.24M chn 1536 Aggregation board	Needs detector finalization
Avg Data Vol before trigger	474.2Gbps	101.7Gbps	298.8Gbps	249.1 Gbps	27.9Gbps	34.4Gbps	4.6Tbps (needs finalization)	Needs finalization	Needs finalization	Needs finalization	Needs finalization
Occupancy	2.2e-3	2.5e-4				2.8e-4	5.8e-1			1.95e-5	
Sum							5.8Tbps				

Preliminary background and data rate estimation




# Technology survey


BELLE II

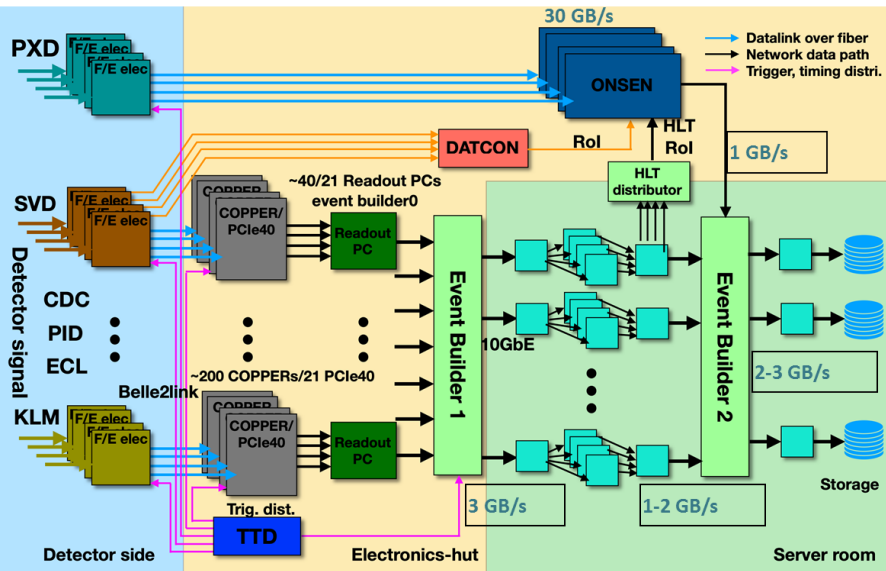


ATLAS Phase II

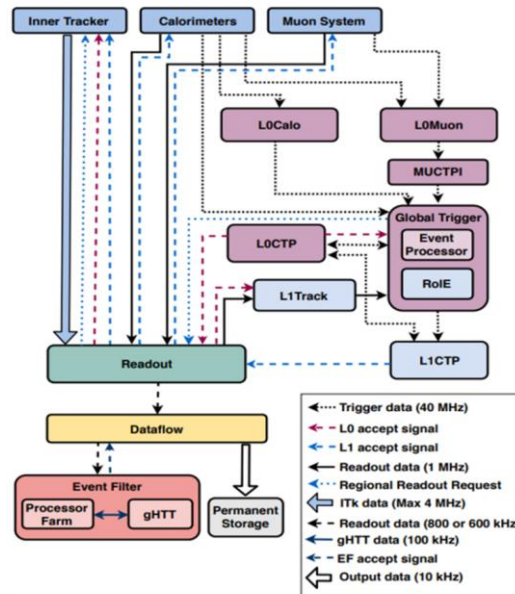

CMS Phase II

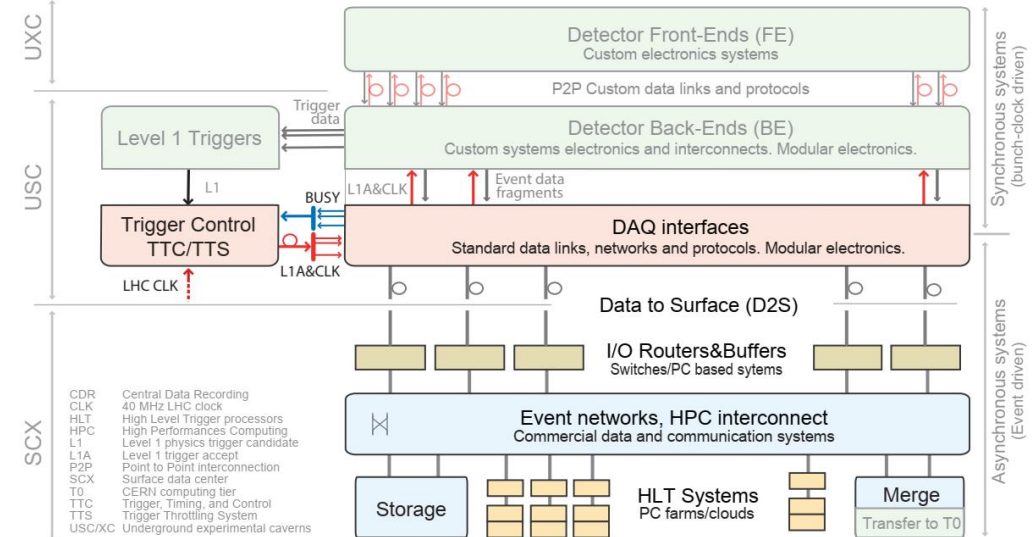

LHCb Phase II

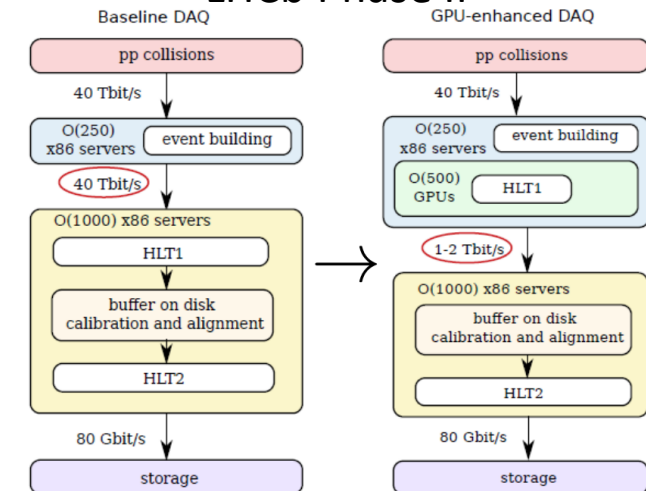

- A few common backend boards (ATCA)
- Network or PCIe bus readout
- GPU/FPGA acceleration at HLT
  - GPU power has increased 1,000 times in the last decade
- Full software trigger @LHCb
  - Deal with higher occupancy and more accurate tracking.

# Our choices


## ■ Fewer and cleaner physical processes @CEPC

## ■ Electronics framework schema

- Full data transmission from Front-End Elec.
- Connect trigger with Back-End Elec.

## ■ Trigger solutions

- Hardware trigger(L1) + high level trigger(HLT)
  - A single type of common hardware trigger board
    - Collect trigger primitives from BEE common boards
    - Send back trigger accept signal to BEE
  - Provide fast and normal trigger menu
  - Network readout

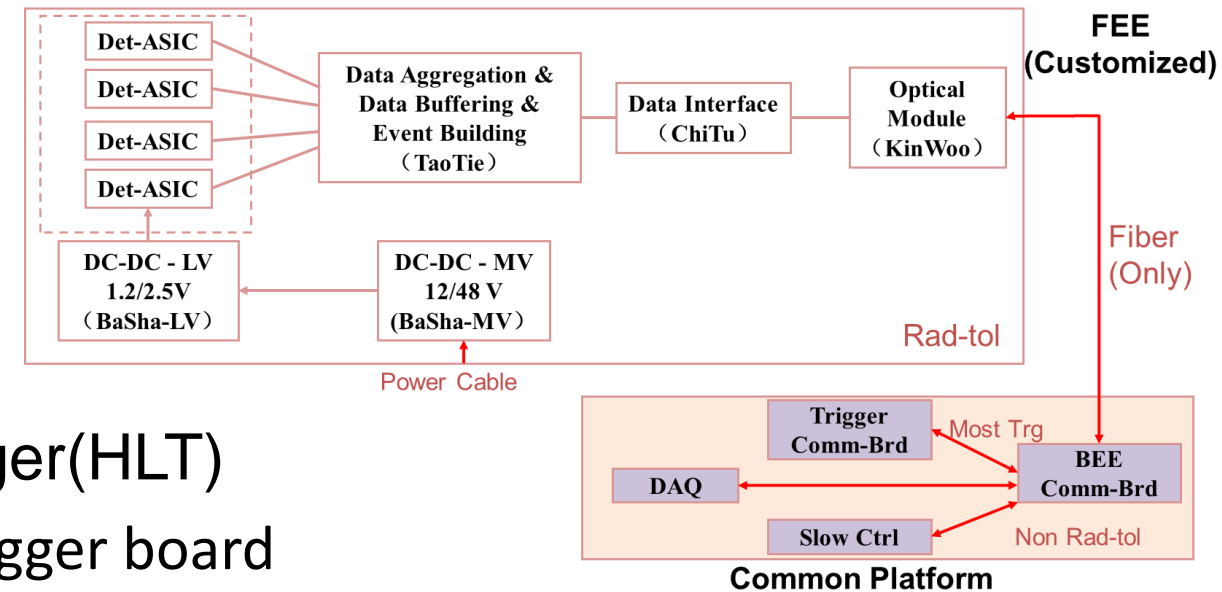

# Main Technical Challenges

- High efficiency algorithms in trigger and background compression
  - 2.887MHz- $\rightarrow$ O(1k)Hz @Higgs
  - 43.3MHz- $\rightarrow$ O(100k)Hz @Z
- Trigger primitive synchronization control with asynchronous data readout from electronics
  - Manage data disorder due to data transfer queuing and delay
  - Align sub-detector data of each bunch crossing within limited time and resource



# Previous experience with TDAQ Hardware

- Designed BESIII trigger system
  - Comprehensive trigger simulation/hardware design/core trigger firmware development
- GSI PANDA TDAQ R&D
  - Designed HPCN board for TDAQ
- Designed Belle2Link and HPCN V3 as ONSEN for Belle II
- Designed CPPF system for CMS Phase-I
  - Design MTCA board, Cluster finding and fanout to EMTF/OMTF
- Designing iRPC/RPC Backend/Trigger for CMS Phase-II
  - ATCA common Backend and trigger board



FAIR — Facility for Antiproton and Ion Research in Europe



Extensive experience in TDAQ system design, algorithm and hardware development

# Previous experience with DAQ&DCS

## ■ BESIII DAQ & DCS

- Running since 2008

## ■ Dayabay experiment DAQ&DCS


- Operated from 2011 to 2020

## ■ LHAASO DAQ

- Operated since 2019
- Full software trigger

## ■ JUNO DAQ&DCS

- Two types of data stream
  - HW trigger for waveform
  - Software trigger for TQ hits
- Online event classification

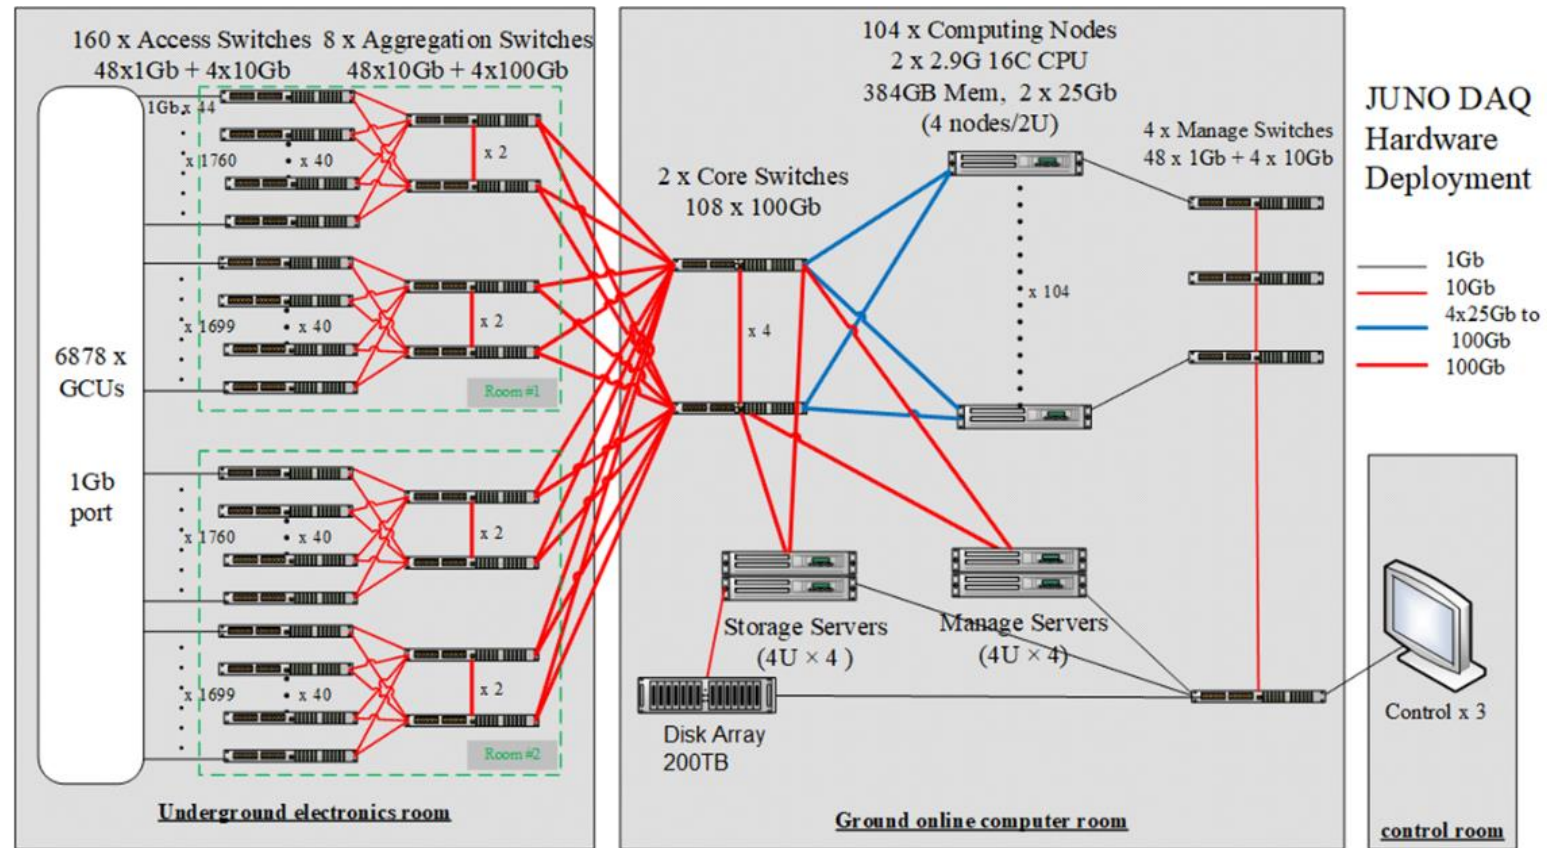


Extensive experience in DAQ&DCS development and operation, including software trigger


# Previous experience with ML algorithm

## Neural network used in ATLAS global trigger

- Example: tau reconstruction at the hardware trigger level
- Train the neural network (NN) with ROI
- Use hls4ml to convert NN model to hls project

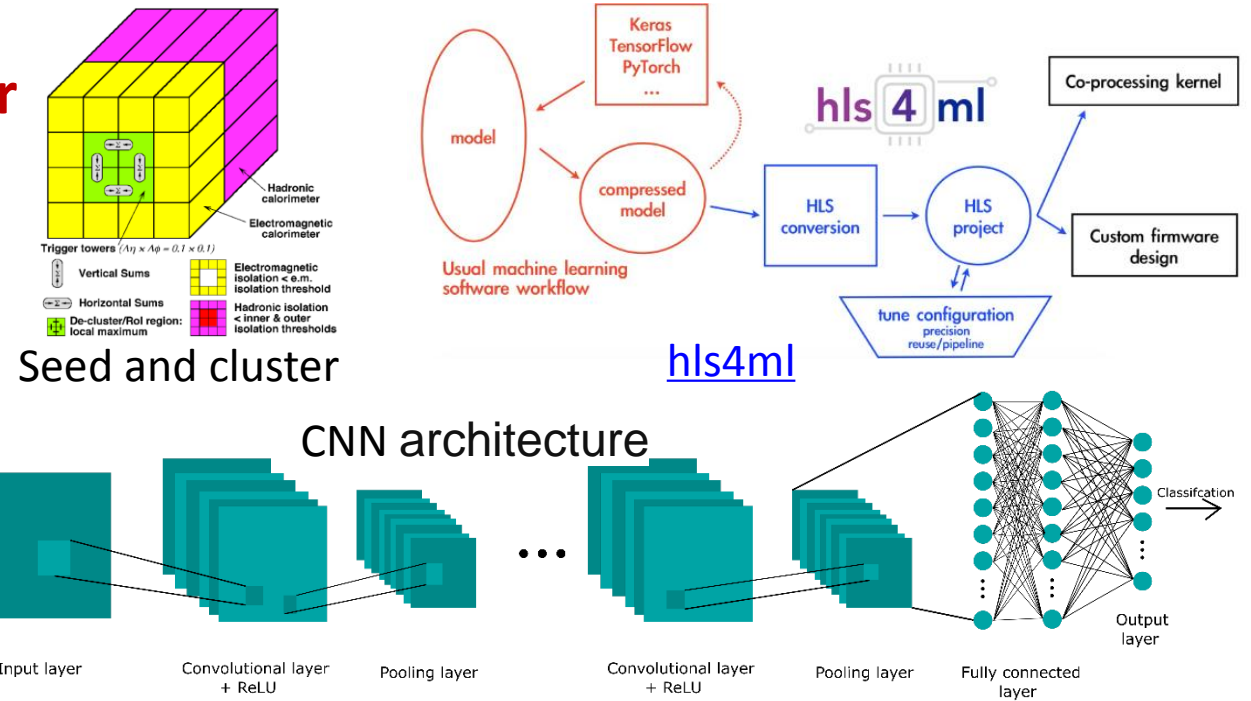




## HLT Acceleration on FPGA platform

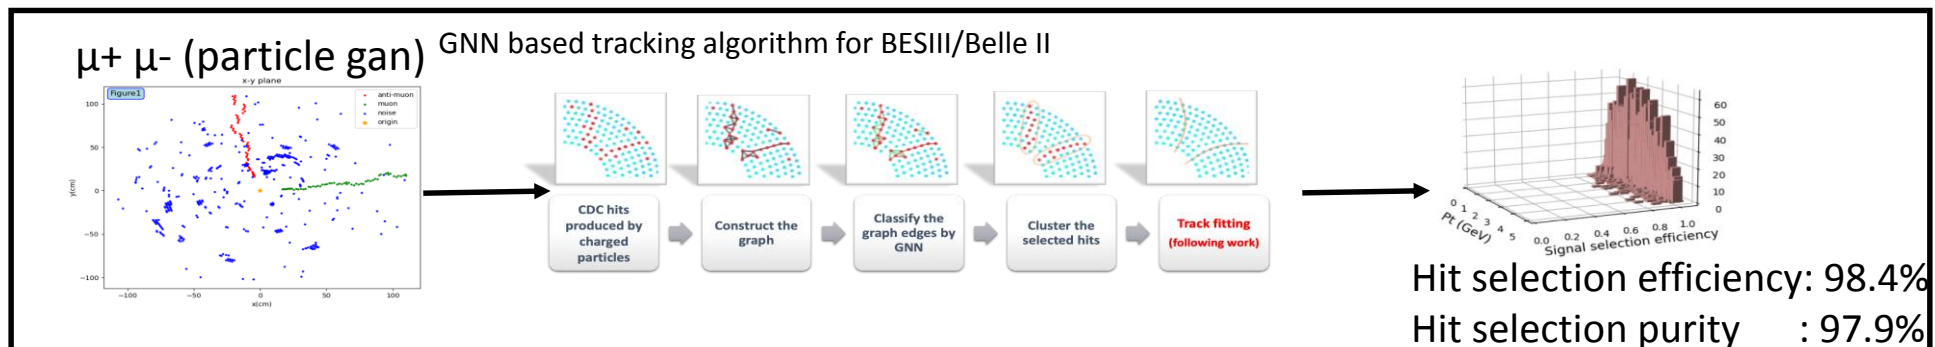

Some experience in ML algorithm development on FPGA for L1 and HLT

# R&D efforts and results

- Started the design of an ATCA common trigger board for CEPC
  - Based on a series of designed xTCA boards



Version	HPCN V1	HPCN V2	HPCN V3	CPPF	HPCN V4	Serenity	HPCN V5
Line rate	3Gbps	3Gbps	6Gbps	10Gbps	16Gbps	25Gbps	10-25Gbps
Num. of ch	8 ch	8ch	8-16ch	36ch	48ch	124ch	36-80 ch
Buffer	2GB	2GB	4GB	—	48GB	—	TBD
Ethernet		1GbE		1/10GbE	10GbE	100GbE	40-100GbE
Application	PANDA		Belle II/PXD	CMS Phase-I	CMS Phase-II		CEPC R&D
Time	2006-		2009-	2013-	2017-		2024-



# Streaming Software Framework – RADAR


heterogeneous Architecture of Data Acquisition and Processing

- **V1:** deployed in LHAASO (3.5 GB/s data rate), *software trigger mode*
- **V2:** upgraded for JUNO (40 GB/s data rate), *mixed trigger mode*
  - Containerized running
- **V3: CEPC-oriented** (~ TB/s data rate) , under development




- **Motivation:**
  - High-throughput data acquisition and processing
- **Current Status:**
  - Over a decade of work led to significant progress, validated through experiments
- **Recent Focus:**
  - **Heterogeneous online processing platforms with GPU**
  - **Real-time data processing acceleration solutions**
- **Expansion:**
  - **Application across various domains** (DAQ, triggering, control, etc.)
  - **Integration of AI technologies** (ML, NLP, expert systems, etc.)

Start to develop new version with GPU acceleration.

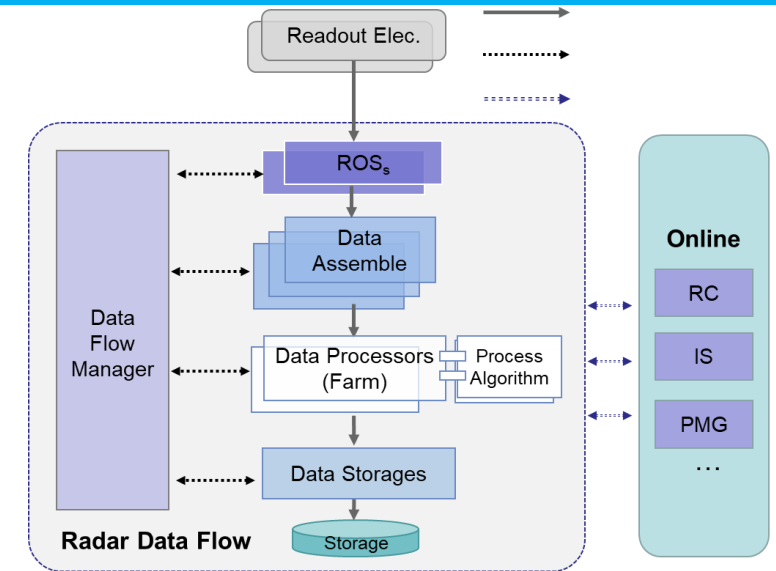


- **General-purpose distributed framework**
- **Lightweight structure**
- **Plug-in modules design**
- **Microservices architecture**

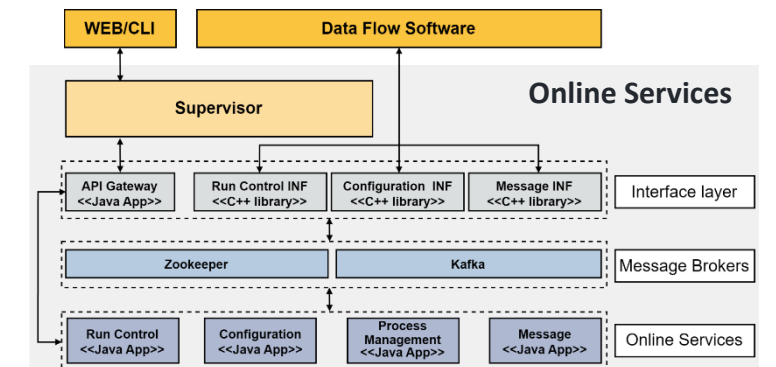


# R&D efforts and results


## Online HA Design

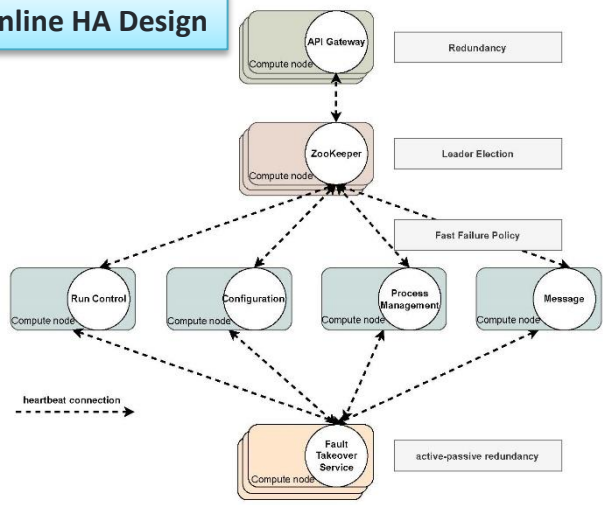

## Dataflow HA Design

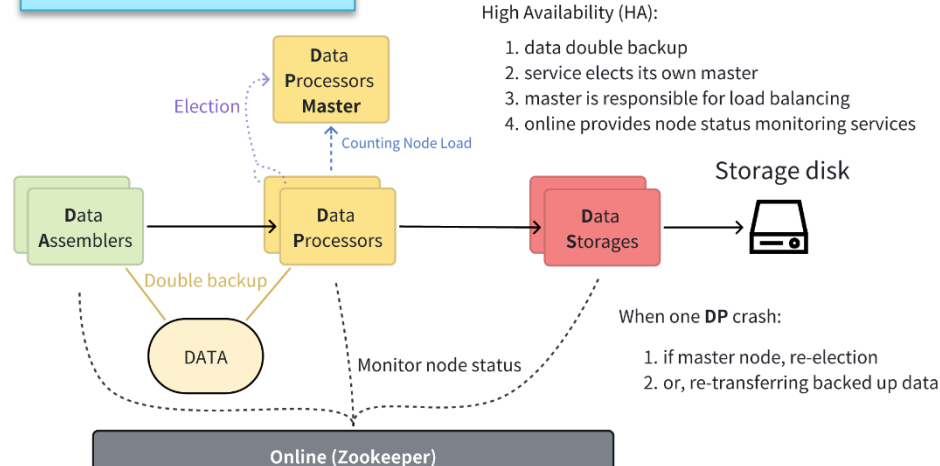


## Hierarchical Computing Strategy

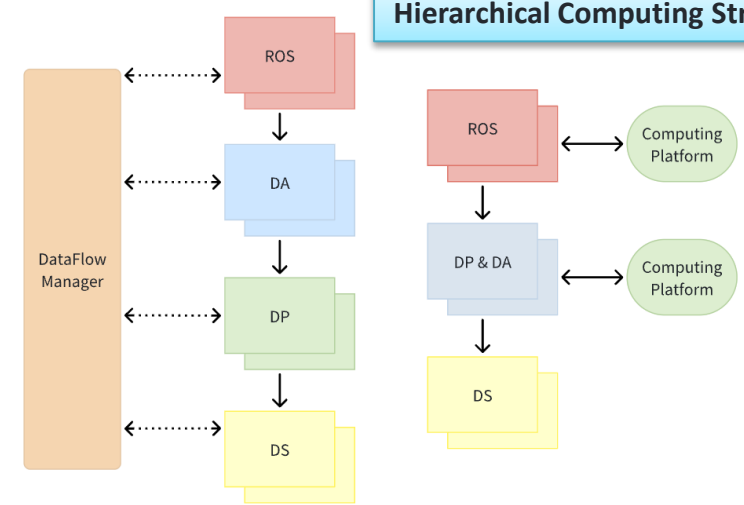


## GPU based online waveform reconstruction in JUNO

### Performance

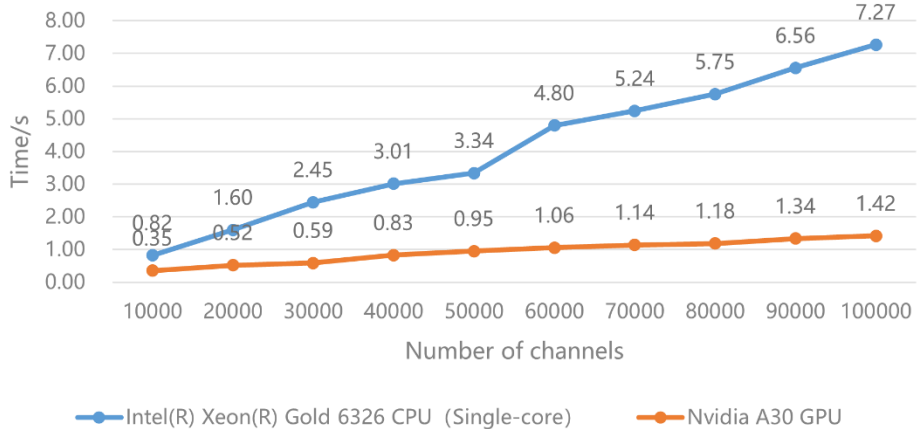


## GPU based nHit trigger algorithm study

channel num = 20k

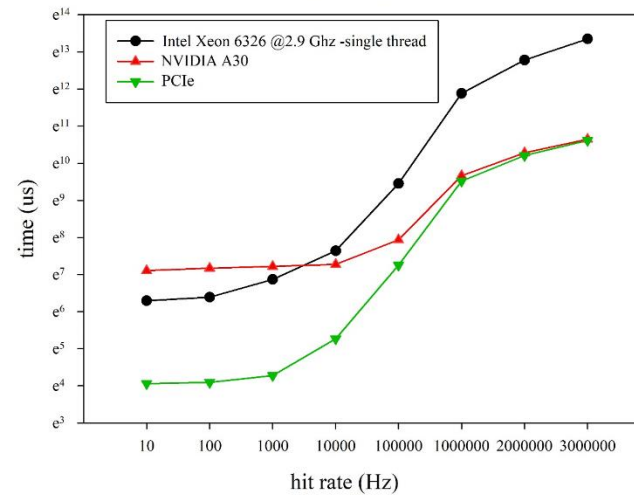

## SIMD based CPU processing acceleration

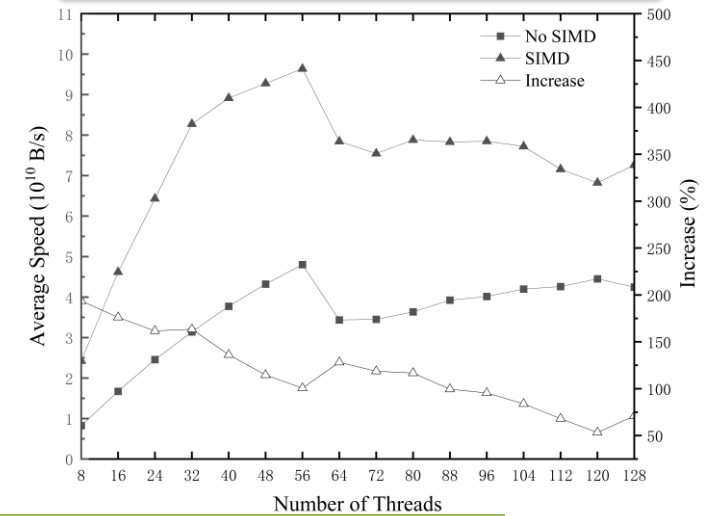

Acceleration progress for waveform reconstruction and software trigger algorithm.



# Preliminary Trigger Simulation with ECal

## Physical events signature at ECal







- Energy deposition is relatively large and concentrated

## Trigger primitive and condition

- Two clusters with the highest energy
- Ecal/HCal barrel  $>0.5\text{GeV}$
- ECal end-cap  $>5\text{GeV}$
- Hcal end-cap  $>50\text{GeV}$

## Trigger efficiency

- nnaa:100%
- nnbb:100%
- nnaZ:99.7%
- nntautau:96.7%
- nnWW:99.1%
- nnZZ:95.8%
- Beambkg:4.8%

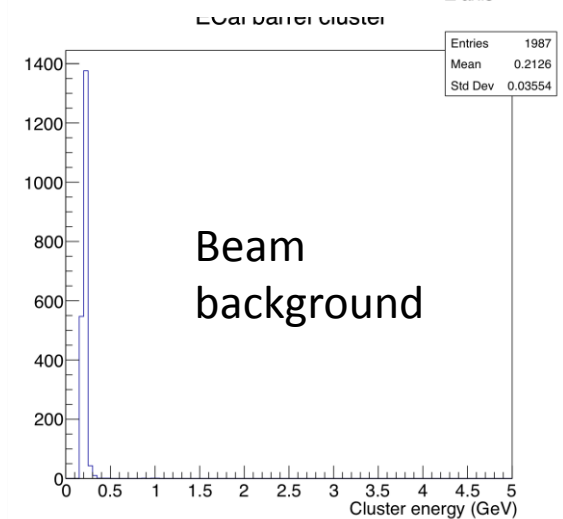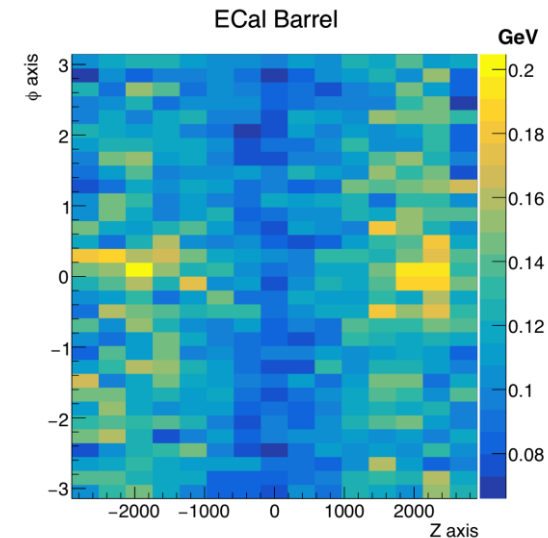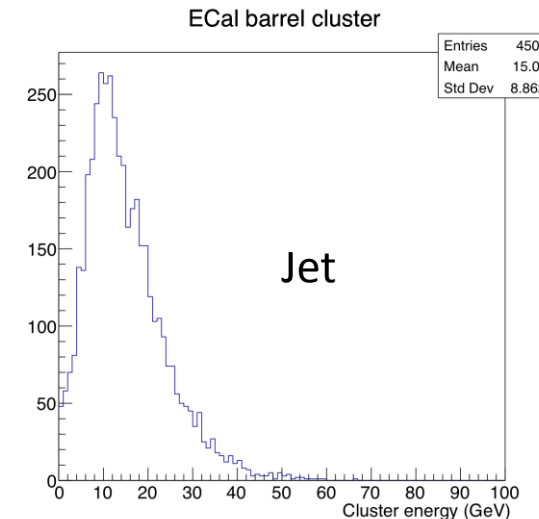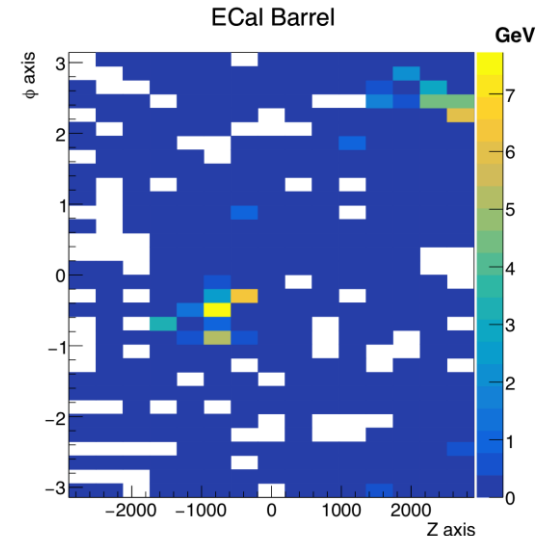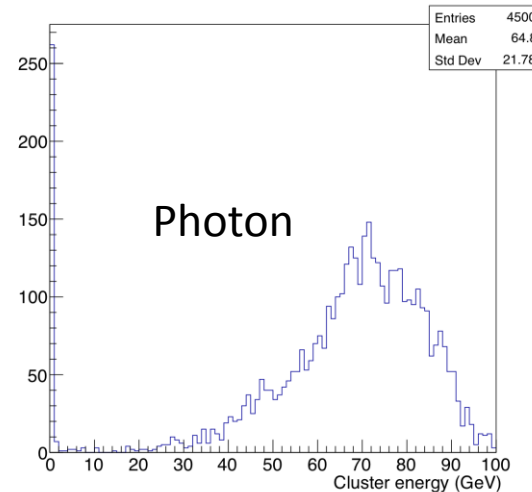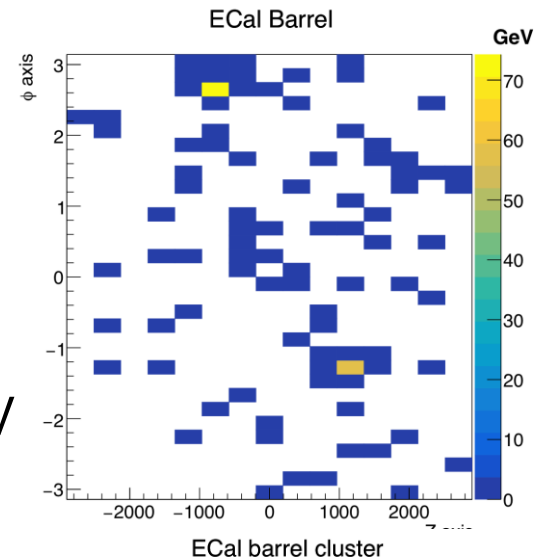

# Preliminary Trigger Simulation with Muon





■ Left: 2000 background events(10BX), Right: 1000 ZH $\rightarrow$ n $\eta$  $\mu\mu$  events

■ Up : Barrel

- Number of hits(Barrel) > 10
- n $\eta$  $\mu\mu$  efficiency:100%
- Background: 19%

■ Down : Endcap


- Higher background hits

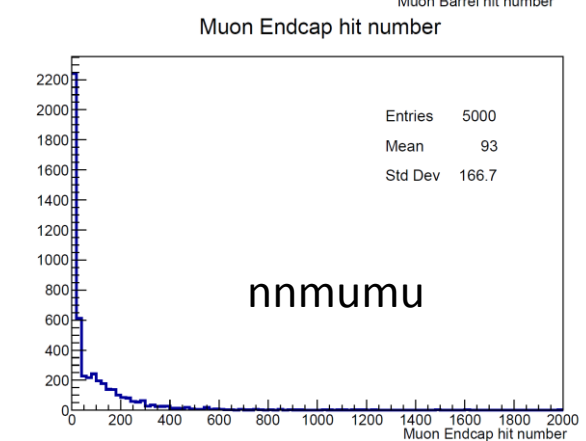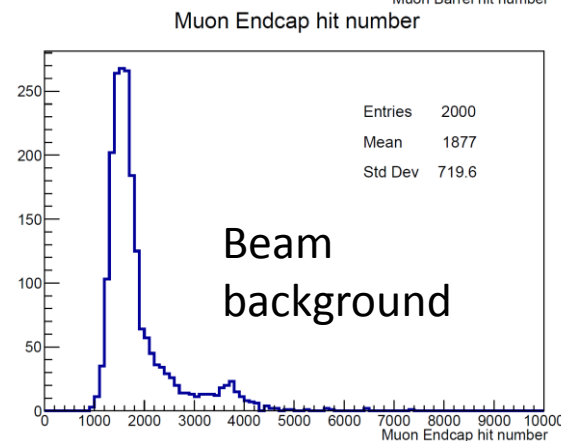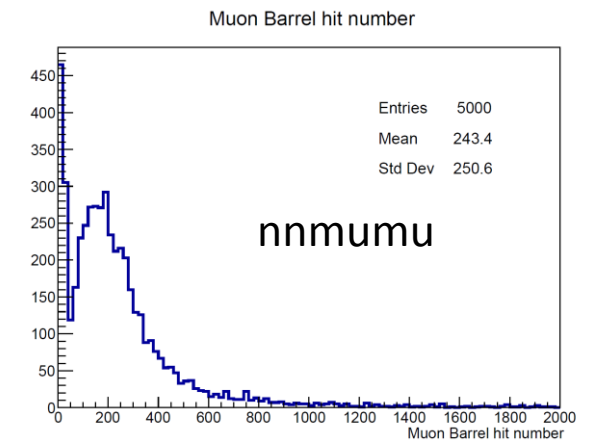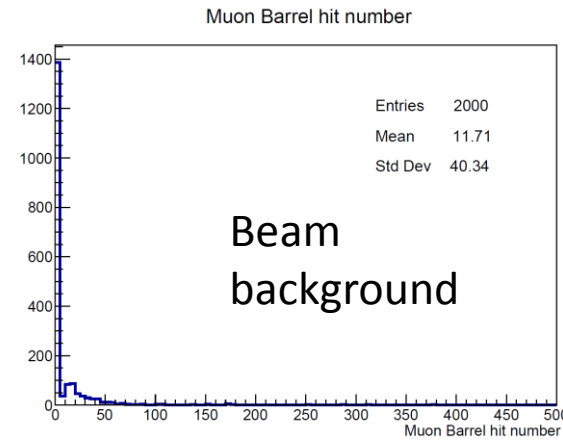

A lot of simulation and research need to be done

# Design of Hardware Trigger Structure


- Trigger primitive(TP)
  - Extracted by BEE
- Local detector trigger
  - Sub energy and tracking...
- Global trigger
  - E-sum and tracking
  - Fast trigger(FT) and L1A generation on demand
- TCDS (Trigger Clock Distribution System)
  - Distribute clock and fast control signals to BEE
- Which detectors participate in trigger needs to be studied

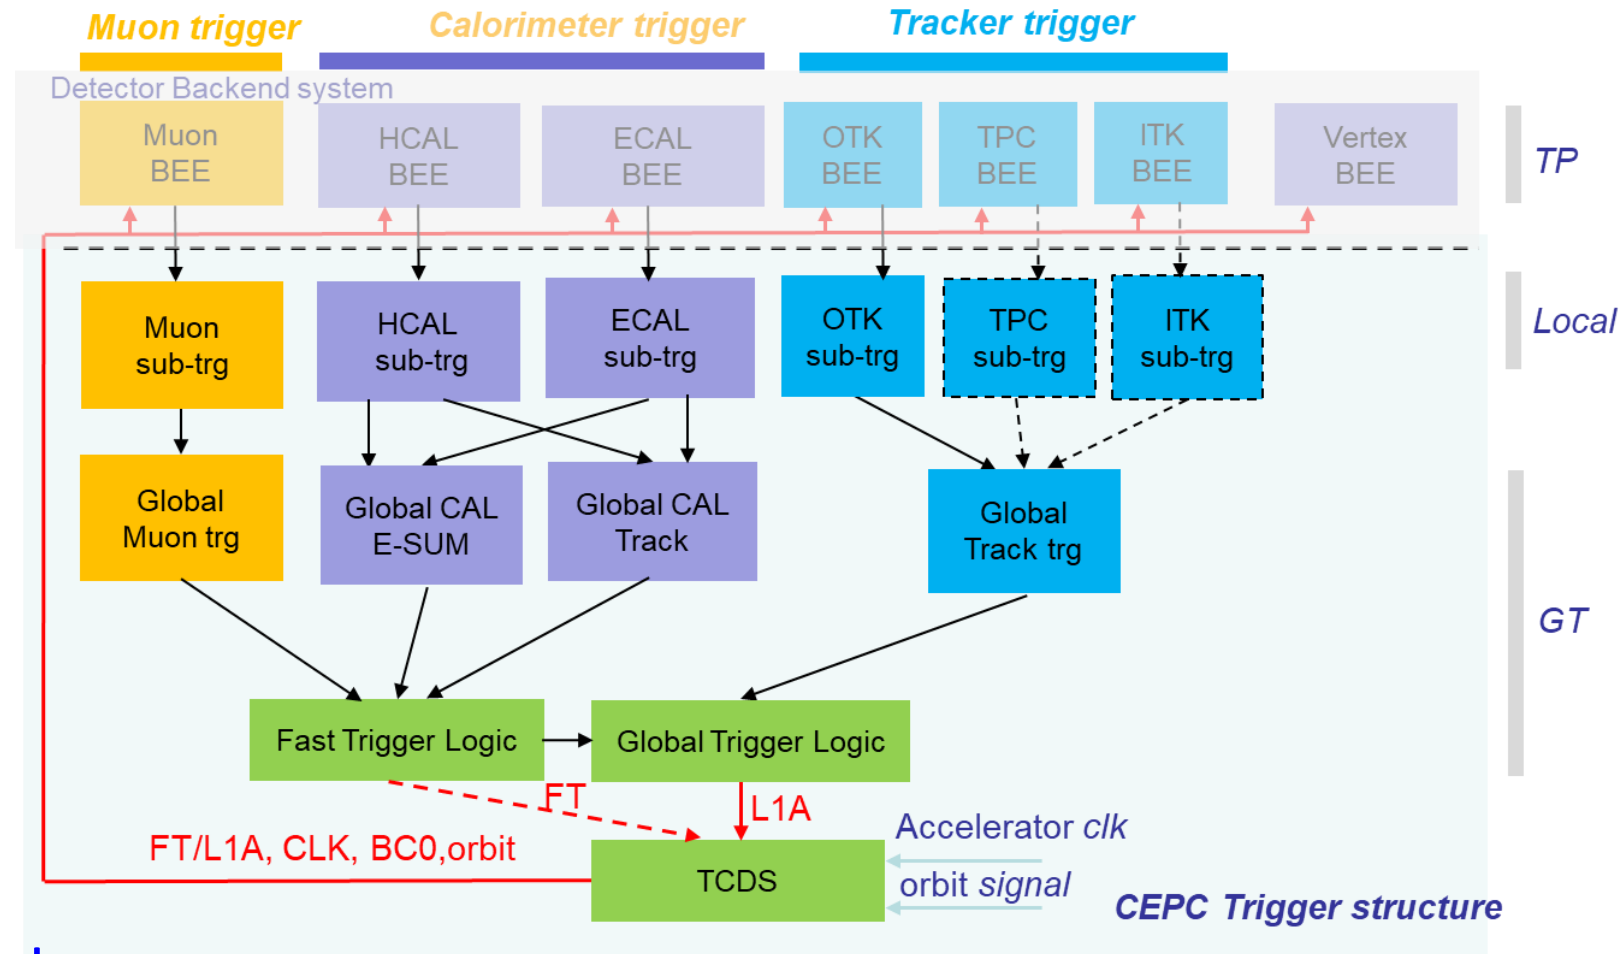

# Preliminary design of the common Trigger Board

## Common Trigger board function list

- ATCA standard
- Virtex-7 FPGA
- Optical channel: 10-25 Gbps/ch
- Channel number: 36-80 channels
- Optical Ethernet port: 40-100GbE
- DDR4 for mass data buffering
- SoC module for board management
- IPMC module for Power management

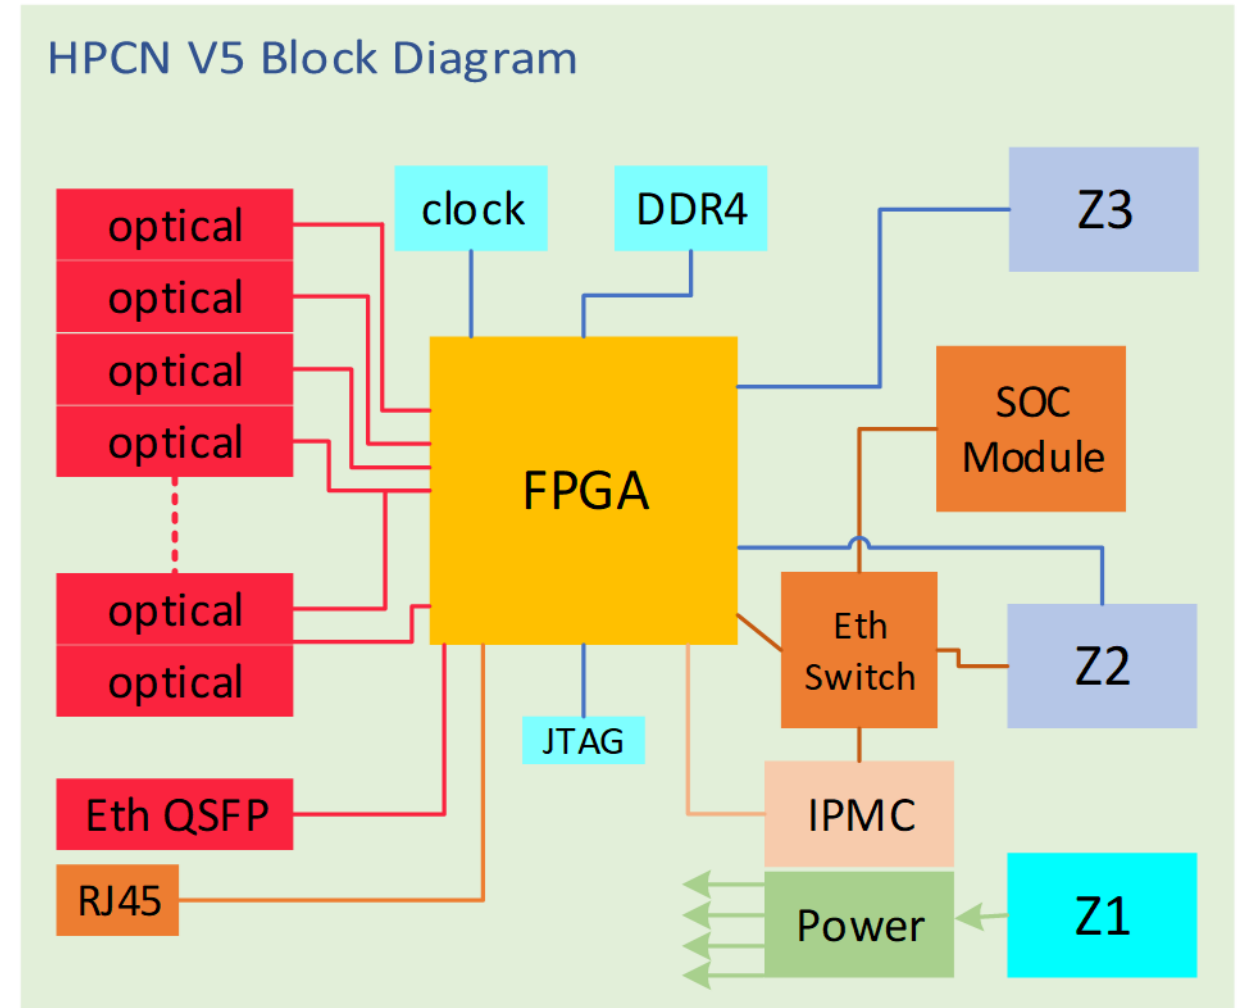

# Preliminary design of TCDS and Readout


## TCDS/TTC

- Clock, BC0, Trigger, orbit start signal distribution
- Full, ERR signal feed back to TCDS/TTC and mask or stop L1A

## Data readout from BEE


- Read out directly or concentrated by DCTD board
- Depending on the size of the data volume

- TCDS-Trigger Clock Distribution System
- TTC- Trigger, Timing and Control
- DCTD-Data Concentrator and Timing Distribution
- BEE-Backend board Electronic

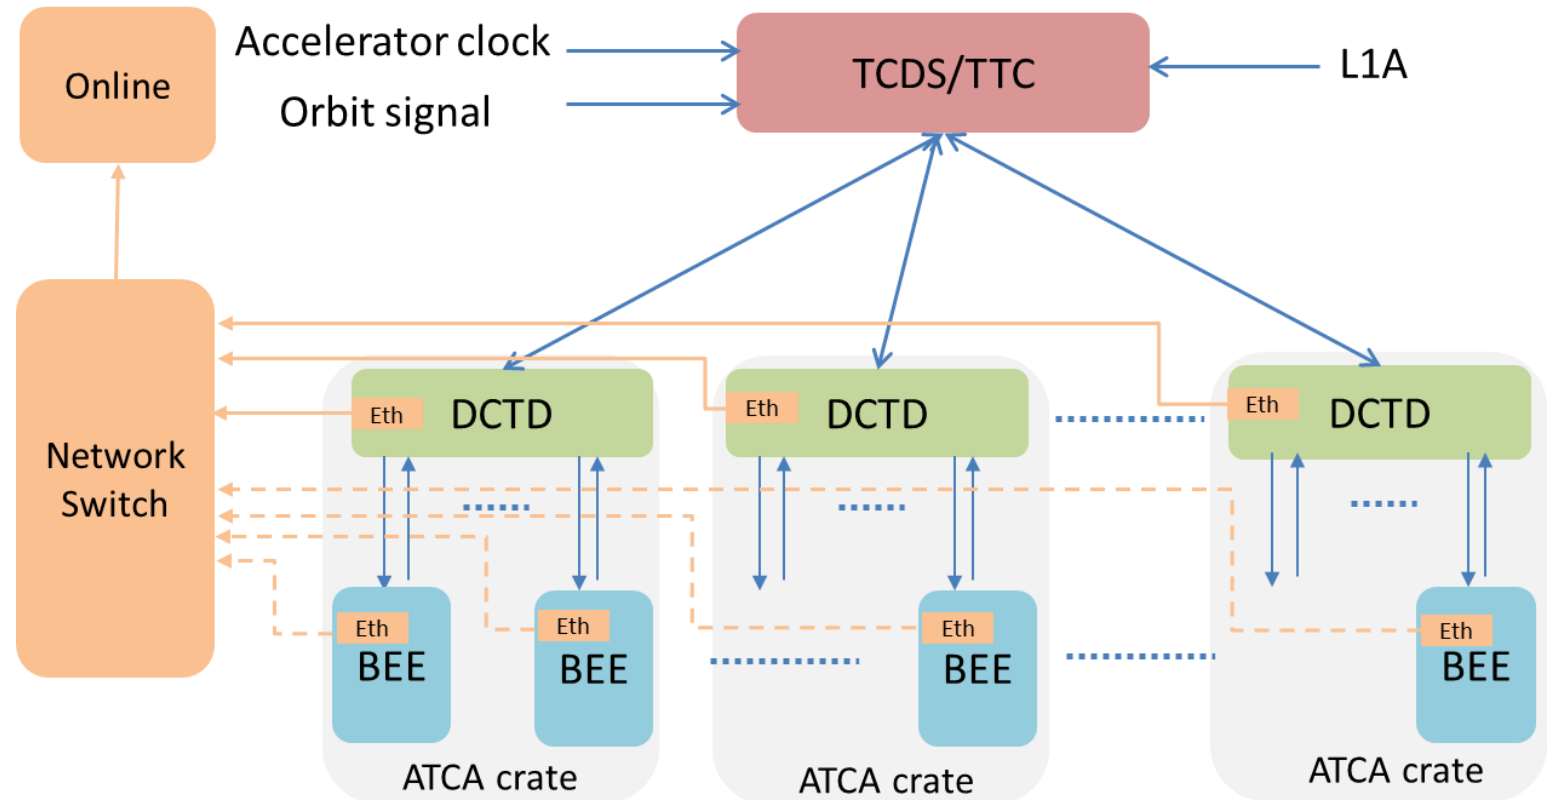

# Architecture Design of DAQ


- Compatible design with or without HW trigger
- Full COTS(commercial-off-the-shelf) hardware
- Readout interface and protocol
  - Ethernet 100Gbps
  - TCP or RDMA
- RADAR software framework
  - Heterogeneous computing
- GPU/FPGA acceleration for HLT
- Disk or memory buffer
  - Decouple computing environments
  - Complete offline algorithm can be run online

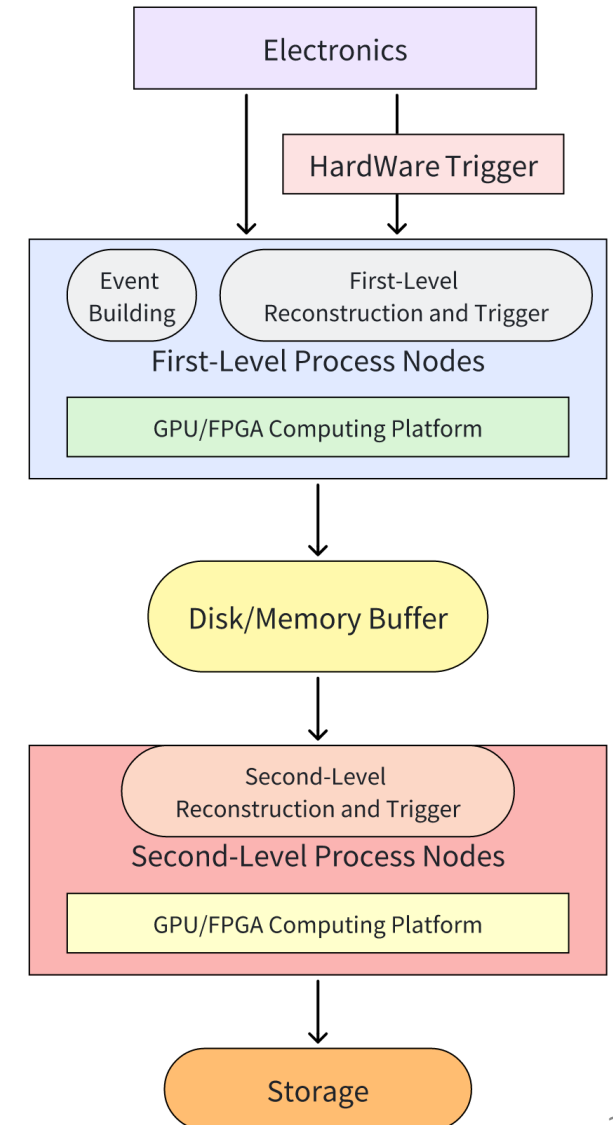




# Preliminary design of DCS

## Requirements

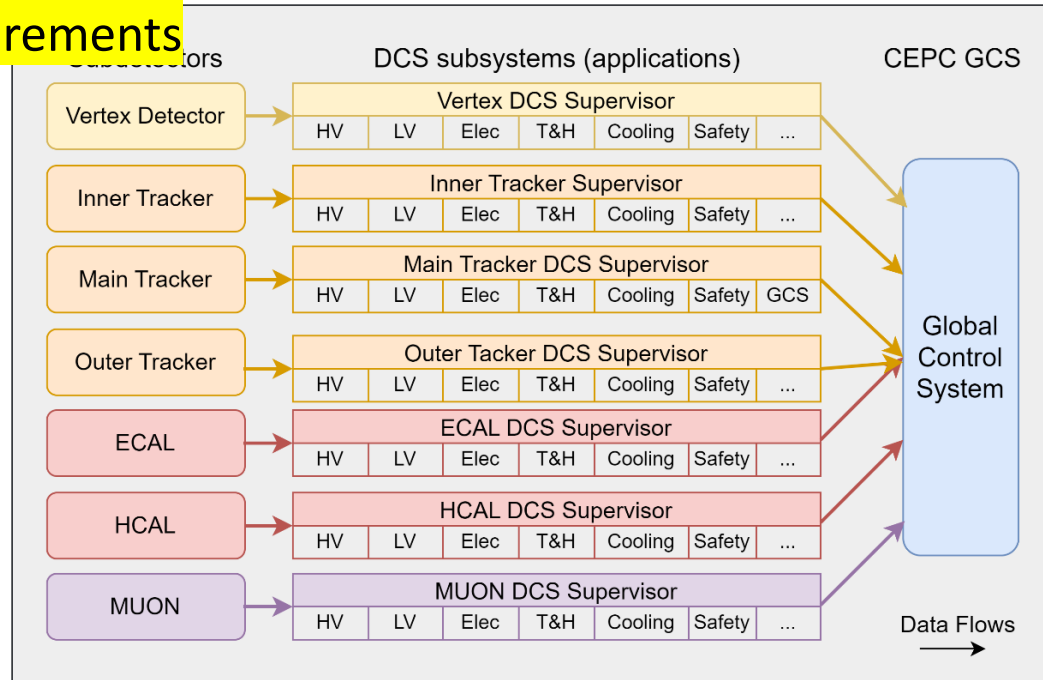


## BESIII Detector Control System Based on LabVIEW

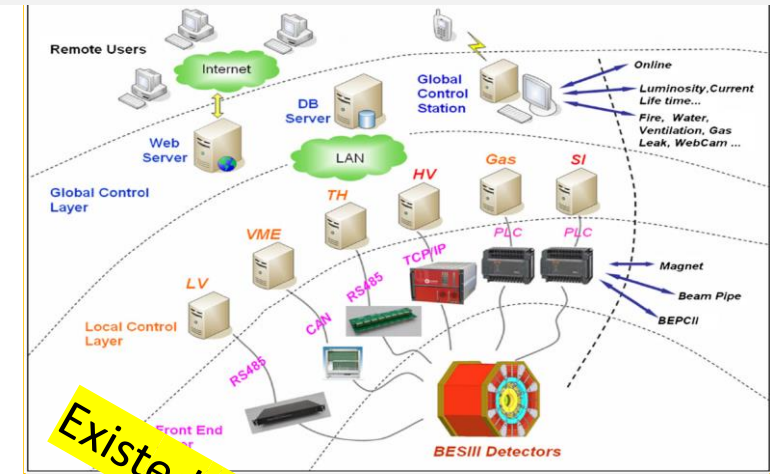

Existed Solutions

## Preliminary Design

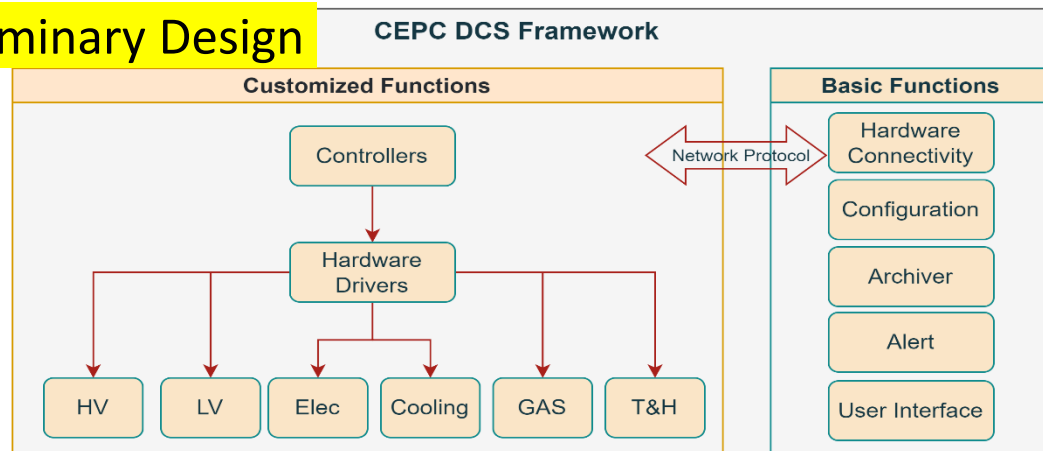

## JUNO DCS Based on EPICS



The screenshot shows the JUNO DCS interface based on EPICS. It includes a control panel for 'Electronics Room 2' and a data table for GCU (Global Control Unit) monitoring.

Set 800v	Set 1200v	Set 1400v	Set 1500v	Set 1600v	Set 17	HV Temp	GCU Temp	Trip	Trip code	Type to search by GCU ID
1	13.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
2	13.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
3	13.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
1	26.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
2	26.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
3	26.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
1	39.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
2	39.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF
3	39.00 V	13	Set	23.00	23.00	23.00	23.00	●	22	TripReset Turn ON Turn OFF

Designed framework based on existed solutions

# Preliminary design of ECS

## Main components of the Experiment Control System

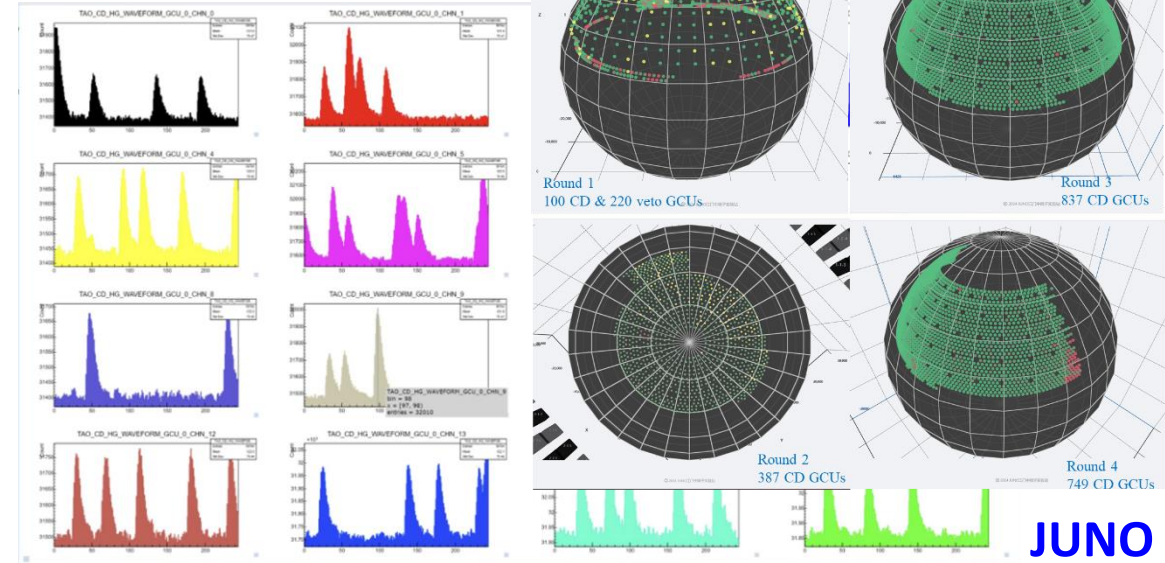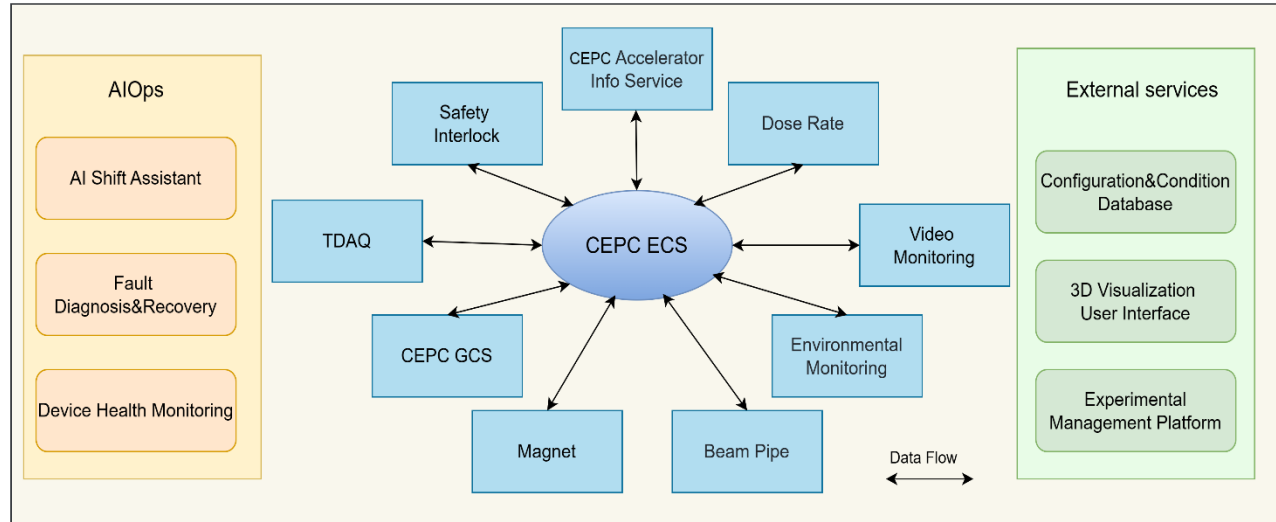


### R&D progress from JUNO and BESIII

- 3D Visualization Monitoring
- AI shift assistant based on LLM+RAG (TAOChat)
- ROOT-based Online Visualization System

### Unified control and monitoring for all system

- TDAQ, DCS, electronics, accelerator and others

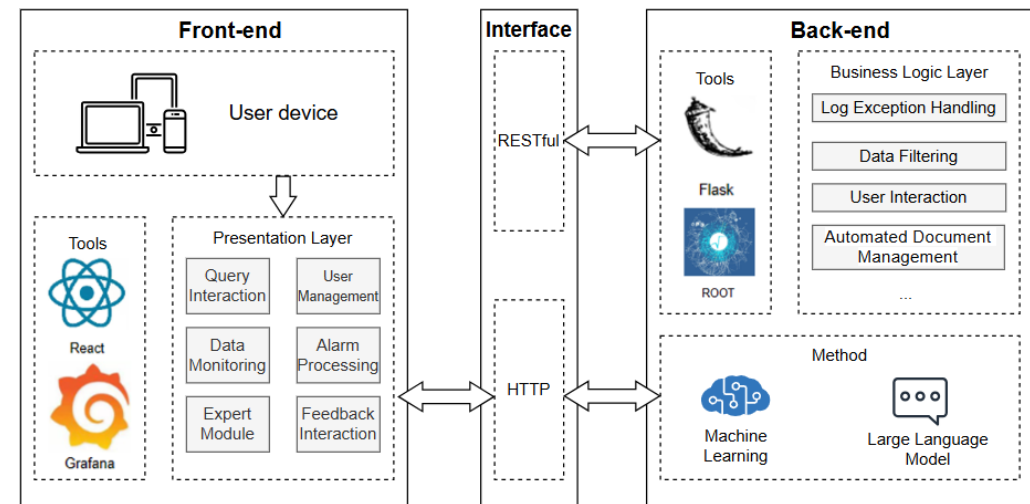

# Research Team

- 15 staff of IHEP TDAQ group
- DAQ
  - Fei Li (DAQ, team leader)
  - Hongyu Zhang (readout)
  - Xiaolu Ji (online processing)
  - Minhao Gu (software architecture)
- Trigger
  - Zhenan Liu (trigger schema)
  - Jingzhou Zhao (hardware trigger)
  - Boping Chen (simulation/algorithm)
  - Sheng Dong (firmware/DCS)
- DCS/ECS
  - Si Ma
- IHEP Students(20 totally)
  - 2 PhD and 3 master
- New member planned
  - 1 staff next year
  - 2 postdoc
- Collaborators
  - Qidong Zhou (HLT, SDU)
  - Yi Liu (HLT, ZZU)
  - Junhao Yin(HLT, NKU)
  - 3 students planned
- We're looking for more collaborators



# Working plan

## ■ TDR related

- Basic trigger simulation and algorithm study
  - Background event study and basic algorithm scheme for each detector
- Detailed hardware trigger and interface design
- Finalize TDAQ and online design scheme

## ■ R&D directions

- Trigger hardware, fast control and clock distribution
- TB/s level high throughput software framework(RADAR)
  - FPGA/GPU acceleration and heterogeneous computing
  - Memory-based distributed buffer
- Detailed trigger simulation and algorithm
- ML/AI algorithm application
  - Trigger/data compression/ AI operation and maintenance
- ROCE/RDMA readout protocol and smart NIC

## ■ Joined DRD WP7.5(Backend systems and COTS components) as an observer.

# Summary

- Following sub detectors design and simulation
- Completed architecture design of TDAQ and online
  - Conventional hardware and high level trigger – default choice
- No show-stopper found for TDAQ and online scheme
  - Challenges: efficient trigger algorithm and handling TB/s data at manageable hardware scale
- More R&D efforts needed to move forward



The logo for the Circular Electron-Positron Collider (CEPC), featuring the letters 'CEPC' in a stylized font with an orange 'e'.

# Thank you for your attention!



中國科學院高能物理研究所  
*Institute of High Energy Physics*  
*Chinese Academy of Sciences*

Oct. 21<sup>th</sup>, 2024, CEPC Detector Ref-TDR Review