

Complementarity Between CEPC & ILC

Tim Barklow (SLAC)


Aug 12, 2015

Workshop on Physics at the CEPC

ILC International Linear Collider

$e^+ e^-$ linear collider with Superconducting RF linac

$250 \leq \sqrt{s} \leq 500$ GeV 31 km in length

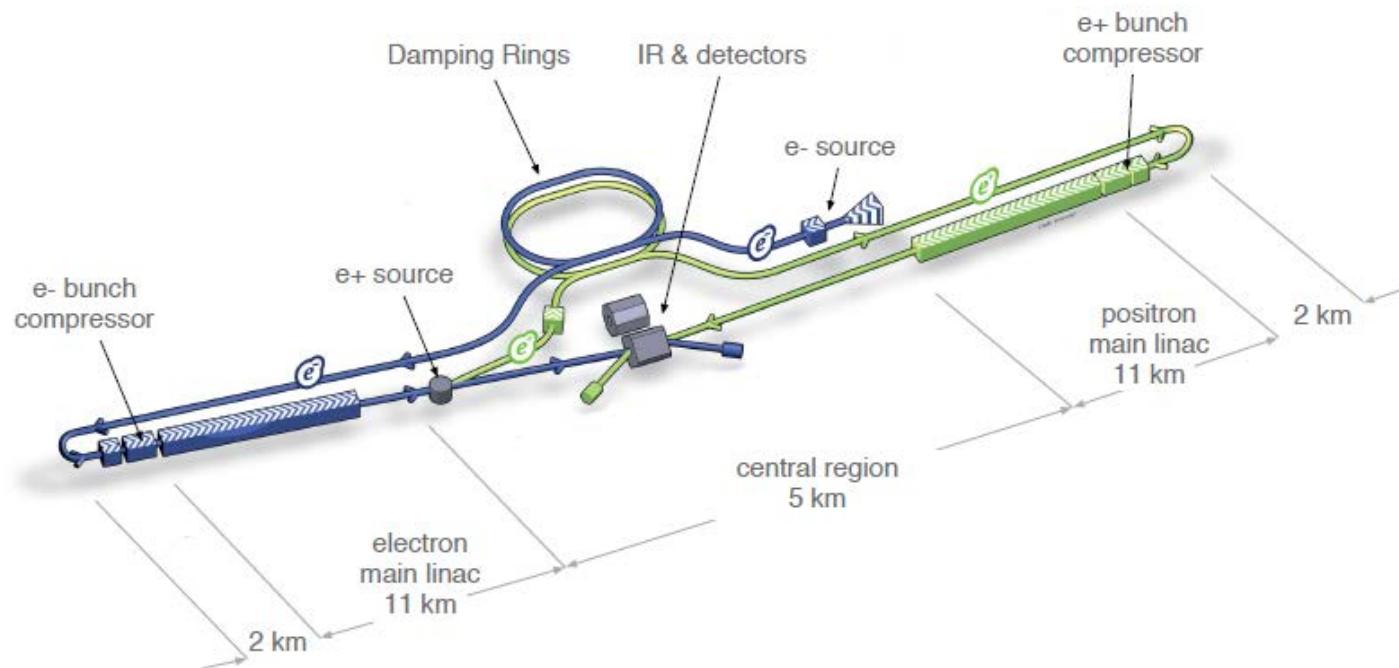

ILC Machine Parameters from TDR

Center-of-mass energy	E_{CM}	GeV	Baseline 500 GeV Machine			L Upgrade	E_{CM} Upgrade	
			250	350	500		A 1000	B 1000
Collision rate	f_{rep}	Hz	5	5	5	5	4	4
Electron linac rate	f_{linac}	Hz	10	5	5	5	4	4
Number of bunches	n_b		1312	1312	1312	2625	2450	2450
Bunch population	N	$\times 10^{10}$	2.0	2.0	2.0	2.0	1.74	1.74
Bunch separation	Δt_b	ns	554	554	554	366	366	366
Pulse current	I_{beam}	mA	5.8	5.8	5.8	8.8	7.6	7.6
Main linac average gradient	G_a	MV m ⁻¹	14.7	21.4	31.5	31.5	38.2	39.2
Average total beam power	P_{beam}	MW	5.9	7.3	10.5	21.0	27.2	27.2
Estimated AC power	P_{AC}	MW	122	121	163	204	300	300
RMS bunch length	σ_z	mm	0.3	0.3	0.3	0.3	0.250	0.225
Electron RMS energy spread	$\Delta p/p$	%	0.190	0.158	0.124	0.124	0.083	0.085
Positron RMS energy spread	$\Delta p/p$	%	0.152	0.100	0.070	0.070	0.043	0.047
Electron polarization	P_-	%	80	80	80	80	80	80
Positron polarization	P_+	%	30	30	30	30	20	20
Horizontal emittance	$\gamma \epsilon_x$	μm	10	10	10	10	10	10
Vertical emittance	$\gamma \epsilon_y$	nm	35	35	35	35	30	30
IP horizontal beta function	β_x^*	mm	13.0	16.0	11.0	11.0	22.6	11.0
IP vertical beta function	β_y^*	mm	0.41	0.34	0.48	0.48	0.25	0.23
IP RMS horizontal beam size	σ_x^*	nm	729.0	683.5	474	474	481	335
IP RMS vertical beam size	σ_y^*	nm	7.7	5.9	5.9	5.9	2.8	2.7
Luminosity	L	$\times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$	0.75	1.0	1.8	3.6	3.6	4.9
Fraction of luminosity in top 1%	$L_{0.01}/L$		87.1%	77.4%	58.3%	58.3%	59.2%	44.5%
Average energy loss	δ_{BS}		0.97%	1.9%	4.5%	4.5%	5.6%	10.5%
Number of pairs per bunch crossing	N_{pairs}	$\times 10^3$	62.4	93.6	139.0	139.0	200.5	382.6
Total pair energy per bunch crossing	E_{pairs}	TeV	46.5	115.0	344.1	344.1	1338.0	3441.0

Note there are two types of upgrades:

Luminosity upgrade: Install extra klystrons and modulators so number of bunches can be doubled; envisioned after 8 years of baseline running

Energy upgrade: Increase accel. gradient, lengthen linac, or both. TDR config assumes 49 km. length; envisioned after 20 years of running

Luminosity Upgrade for Ecm=250 GeV

			Baseline ILC	Lumi Upgrade
Center-of-mass energy	E_{CM}	GeV	250	250
Collision rate	f_{rep}	Hz	5	10
Electron linac rate	f_{linac}	Hz	10	10
Number of bunches	n_b		1312	2625
Pulse current	I_{beam}	mA	5.8	8.75
Average total beam power	P_{beam}	MW	5.9	21
Estimated AC power	P_{AC}	MW	129	200
Luminosity	L	$\times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$	0.75	3.0


The $\sqrt{s} = 250$ GeV lumi is quadrupled by doubling the number of bunches *and* the collision rep rate

The 10 Hz operation which in the baseline was split between 5 Hz collision and 5 Hz e^+ production is now 100% collision in the lumi upgrade config. A longer undulator should be ready that can produce sufficient e^+ yield with 125 GeV electrons

Note the AC power is 200 MW, the same as the 5 Hz lumi upgrade power at $\sqrt{s} = 500$ GeV.


Also note that ILC produces $3 \times 10^{34} \text{ cm}^{-2}\text{s}^{-1}$ luminosity with 200 MW total AC power.

Luminosity [$10^{34} \text{ cm}^{-2}\text{s}^{-1}$]

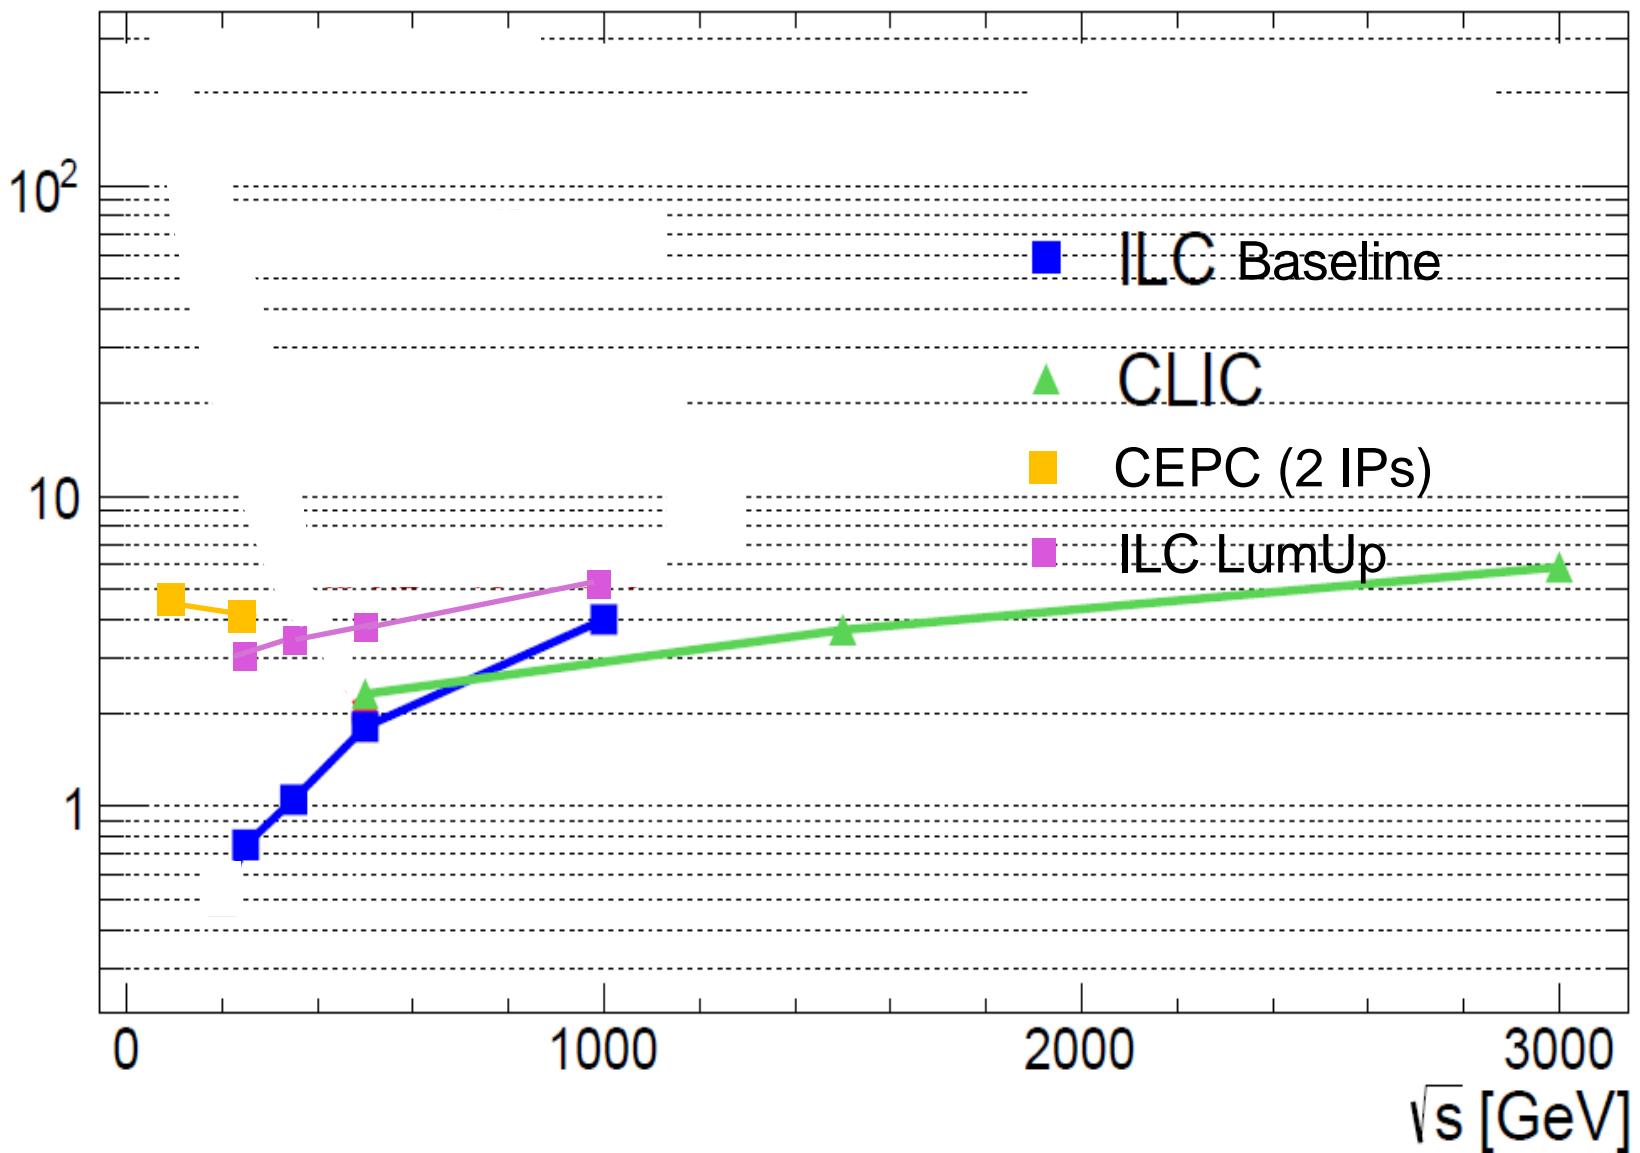


Full Simulation Performed with ILD and/or SiD Detector

The SiD Detector

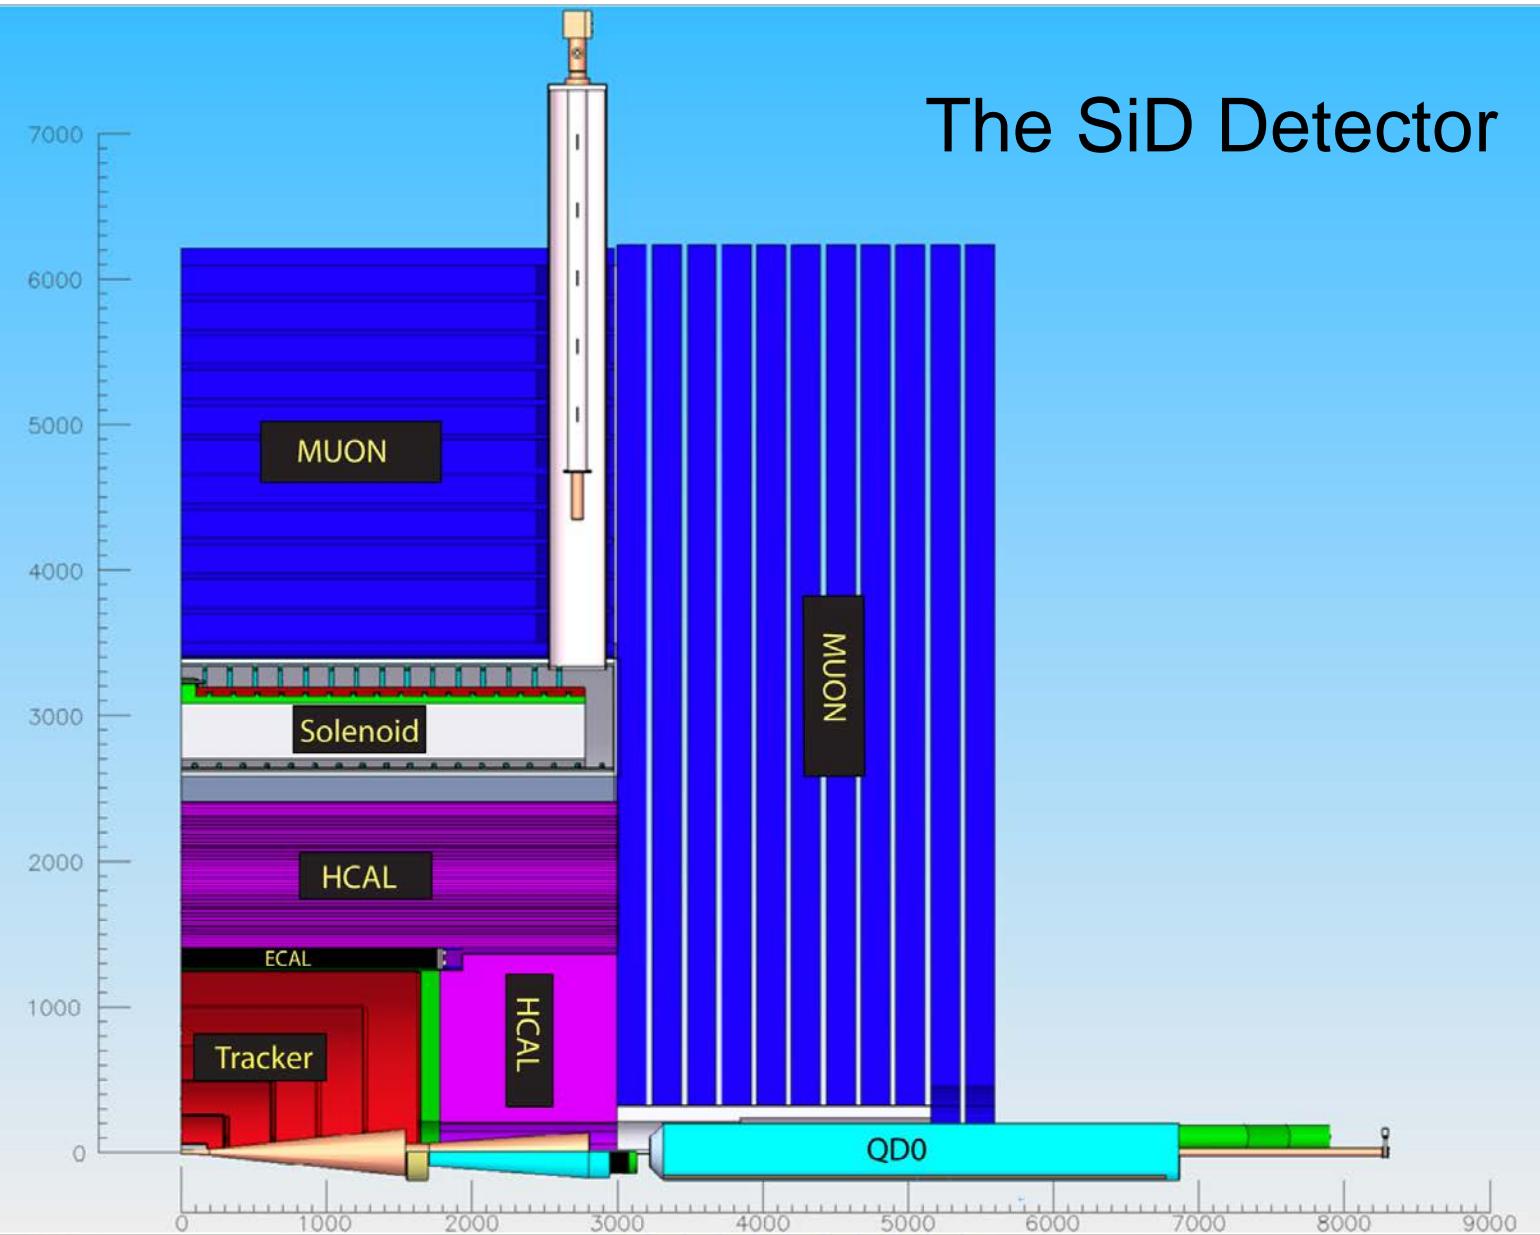

SiD Global Parameters

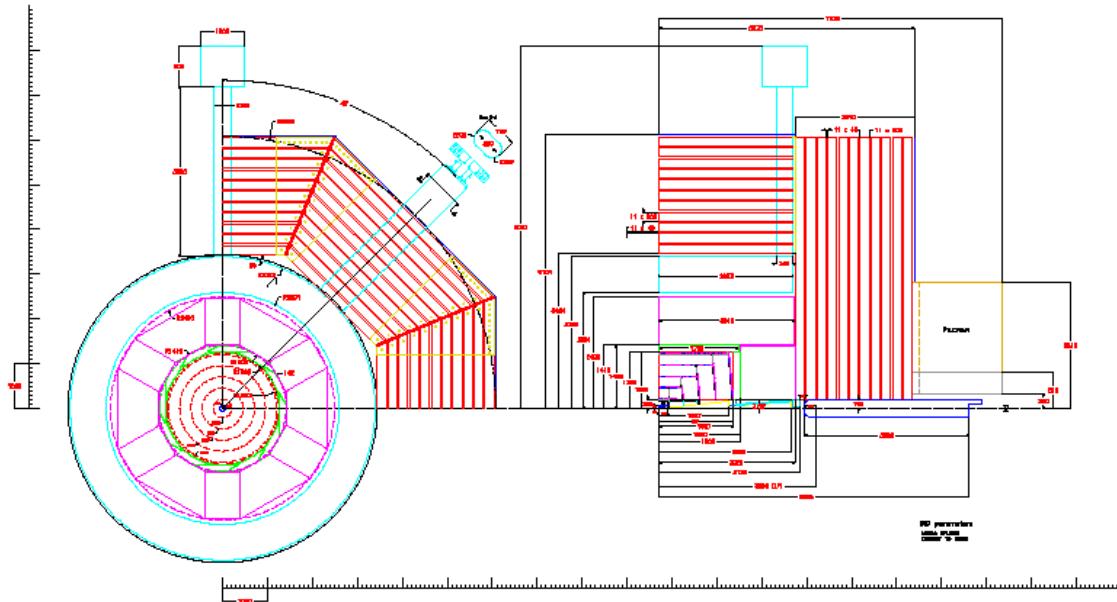

Detector		Radius (m)		Axial (z) (m)	
		Min	Max	Min	Max
Vertex Detector	Pixels	0.014	0.06		0.18
Central Tracking	Strips	0.206	1.25		1.607
Endcap Tracker	Strips	0.207	0.492	0.85	1.637
Barrel Ecal	Silicon-W	1.265	1.409		1.765
Endcap Ecal	Silicon-W	0.206	1.25	1.657	1.8
Barrel Hcal	RPCs	1.419	2.493		3.018
Endcap Hcal	RPCs	0.206	1.404	1.806	3.028
Coil	5 tesla	2.591	3.392		3.028
Barrel Iron	RPCs	3.442	6.082		3.033
Endcap Iron	RPCs	0.206	6.082	3.033	5.673

Combining barrel and endcaps
these trackers and calorimeters
cover $|\cos \theta| \leq 0.99$

LumiCal and BeamCal are used
for $|\cos \theta| > 0.99$

Pulsed power is possible due to
low duty cycle 5 Hz rep rate:
eliminates need for cooling

Construct 500 GeV from start

- 500 GeV scenarios study
 - TDR Baseline
 - Emphasizes higher energy - strength of ILC
- Study parameters
 - assume 20 years of operation
 - compare 3 scenarios (studied more)
 - G₂₀, H₂₀, I₂₀
 - Snowmass white paper studied also for comparison
 - arXiv:1310.0763 [hep-ph]

Assumptions

- Full calendar year is assumed to be 8 months at a 75% efficiency (the RDR assumption). This corresponds to $Y = 1.6 \times 10^7$ seconds of integrated running. (significantly higher than a Snowmass year of 10^7 seconds.)
- A **ramp-up** of luminosity performance is in general assumed after:
 - (a) initial construction and after ‘year 0’ commissioning;
 - (b) after a downtime for a luminosity upgrade;
 - (c) a change in operational mode which may require some learning curve (e.g. going to 10-Hz collisions).
- For initial physics run *after construction and year 0 commissioning*, the RDR ramp of 10%, 30%, 60% and 100% is assumed over the first four years.
- The ramp *after the shutdowns for installation of the luminosity upgrade* is assumed slightly shorter (10%, 50%, 100%) with no year 0.
- *Going down in centre of mass energy* from 500 GeV to 350 GeV or 250 GeV is assumed to have no ramp, since there is no machine modification.
- *Going to 10-Hz operation at 50% gradient* does assume a ramp (25%, 75%, 100%), since 10-Hz affects the entire machine.
- A major 18 month shutdown is assumed for the luminosity upgrade.
- Unlike TDR: 10-Hz and 7-Hz operation assumed at 250 GeV and 350 GeV

Preferred Scenario

	\sqrt{s}	$\int \mathcal{L} dt$	L_{peak}	Ramp				T	T_{tot}	Comment
	[GeV]	[fb $^{-1}$]	[fb $^{-1}$ /a]	1	2	3	4	[a]	[a]	
Physics run	500	500	288	0.1	0.3	0.6	1.0	3.7	3.7	TDR nominal at 5 Hz
Physics run	350	200	160	1.0	1.0	1.0	1.0	1.3	5.0	TDR nominal at 5 Hz
Physics run	250	500	240	0.25	0.75	1.0	1.0	3.1	8.1	operation at 10 Hz
Shutdown								1.5	9.6	Luminosity upgrade
Physics run	500	3500	576	0.1	0.5	1.0	1.0	7.4	17.0	TDR lumi-up at 5 Hz
Physics run	250	1500	480	1.0	1.0	1.0	1.0	3.2	20.2	lumi-up operation at 10 Hz

Table 7: Scenario H-20: Sequence of energy stages and their real-time conditions.

H-20



	first phase	lumi upgrade	total	Snowmass Lum-up [†]
250 GeV	500 fb $^{-1}$	1500 fb $^{-1}$	2 ab $^{-1}$	1.15 ab $^{-1}$
350 GeV	200 fb $^{-1}$		0.2 ab $^{-1}$	
500 GeV	500 fb $^{-1}$	3500 fb $^{-1}$	4 ab $^{-1}$	1.6 ab $^{-1}$
time	8.1 yrs	10.6 yrs	20.2 yrs*	

* includes 1.5 years for luminosity upgrade

† ILC Higgs whitepaper: arXiv:1310.0763

Top Physics and New Particle Searches at $\sqrt{s} \geq 350$ GeV


Top mass from an LC threshold scan

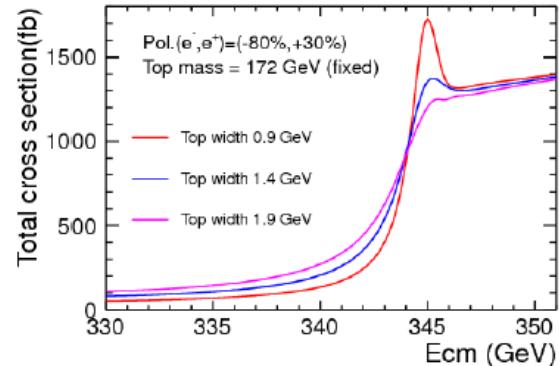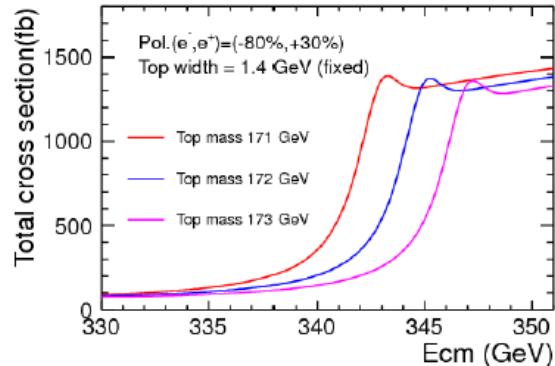

Threshold shape depends strongly on mass, width.
Normalization sensitive to strong coupling constant and top Yukawa coupling.

Kuhn, Acta Phys. Polon. B12 (1981) 347

Beam energy spread and ISR smear the shape

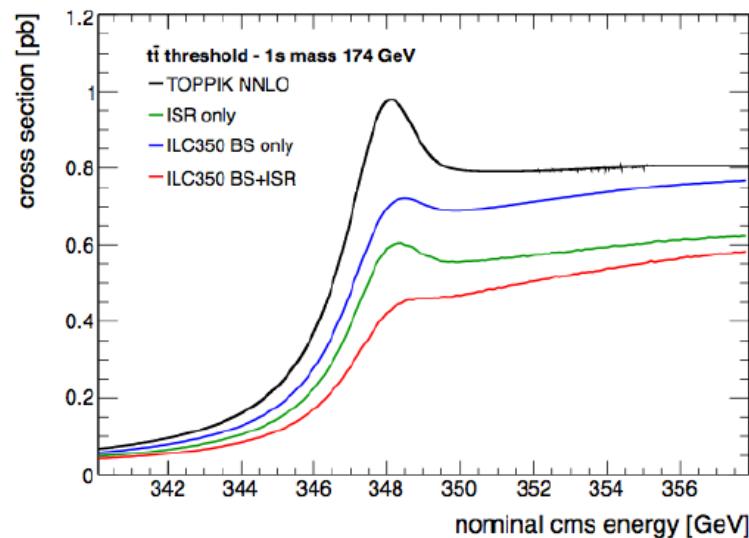


Top quark mass: summary



A very precise measurement of the top quark mass, $\Delta m_t \sim 50$ MeV, can be extracted from a threshold scan

- + $\Delta \alpha_s < 0.001$ (not competitive with world average)
- + $\Delta \Gamma_t < 30$ MeV (translate to constraint on V_{tb})
- + $\Delta y_t/y_t \sim 4.2\%$ (if a precise value of α_s is inserted, otherwise 35%)

Time Evolution of Left-handed Top Coupling & M_{KK} Limit

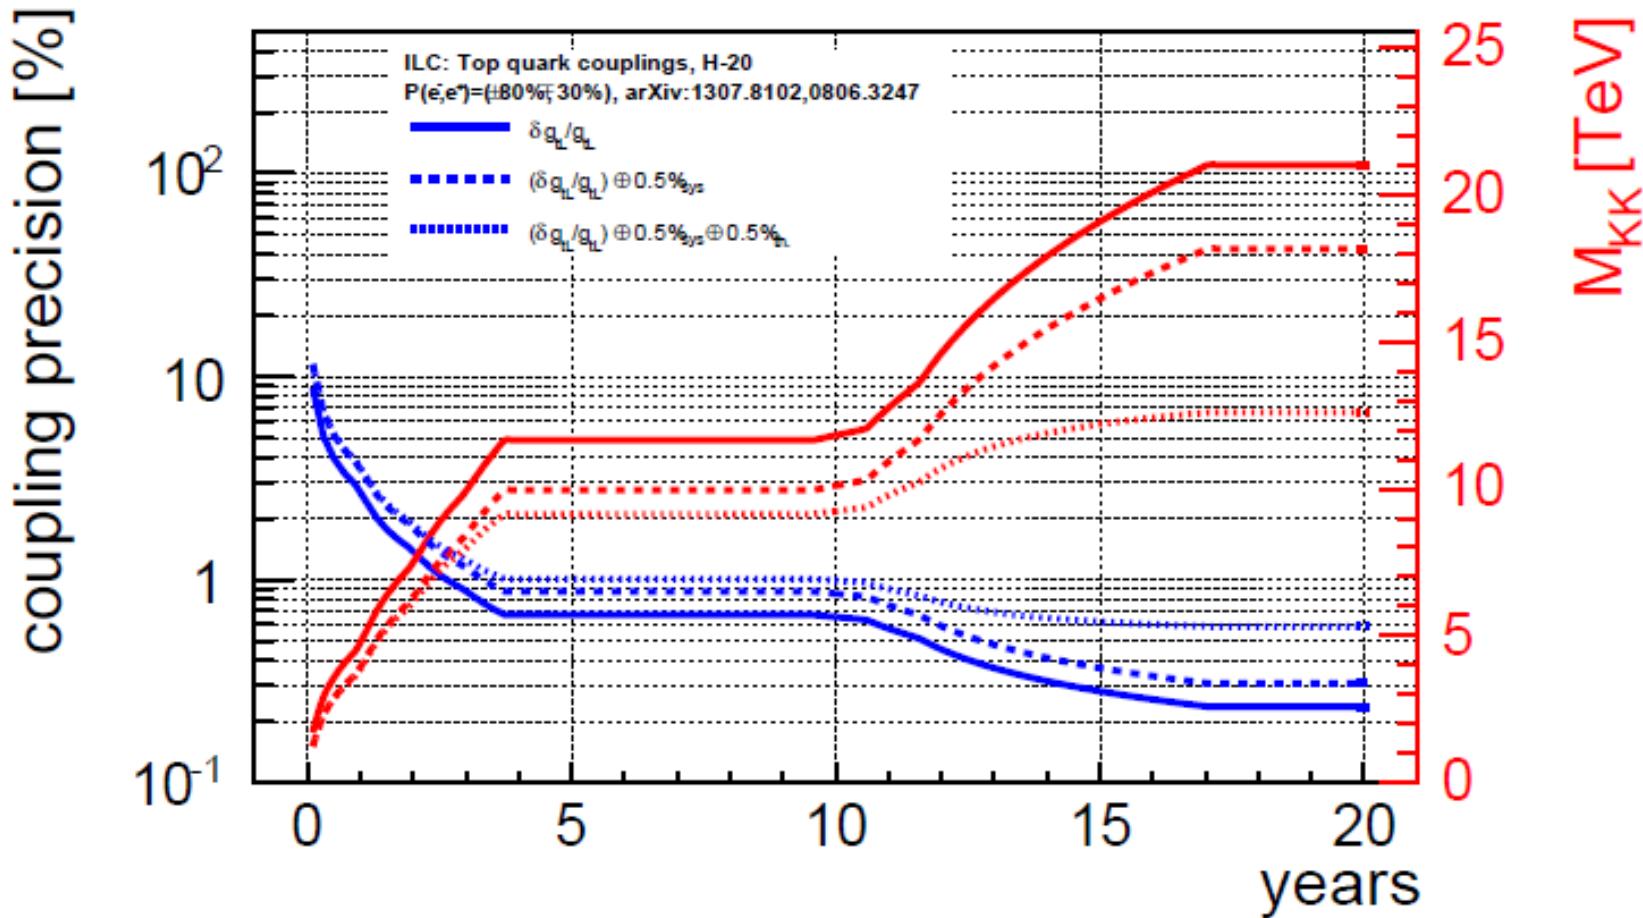



ILC BSM Physics (SUSY and Dark Matter)

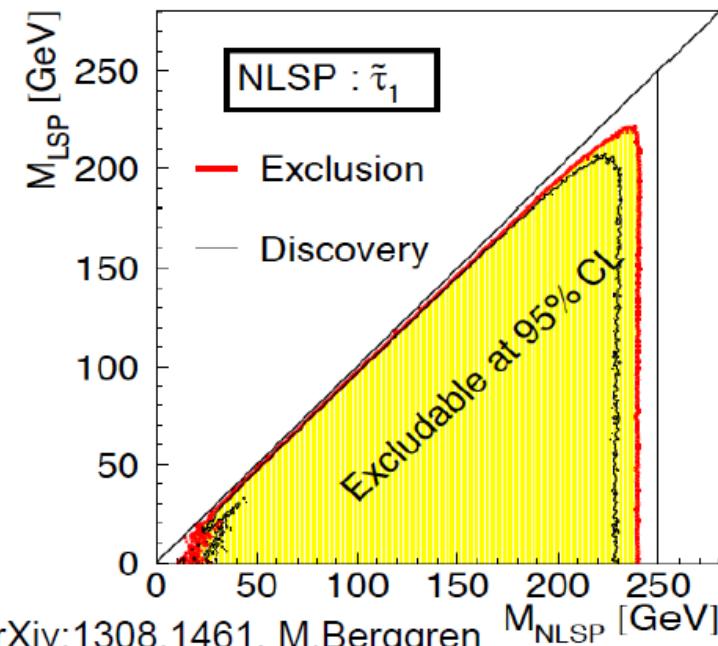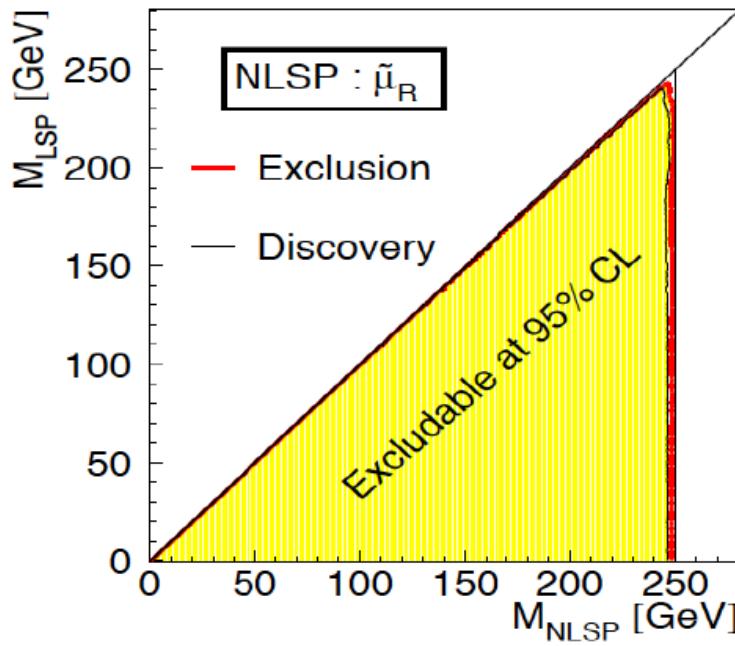


ArXiv:1308.1461, M.Berggren

Loop-hole free, model-independent sensitivity down to very small mass differences

Mono-Photon WIMP prospects at the ILC

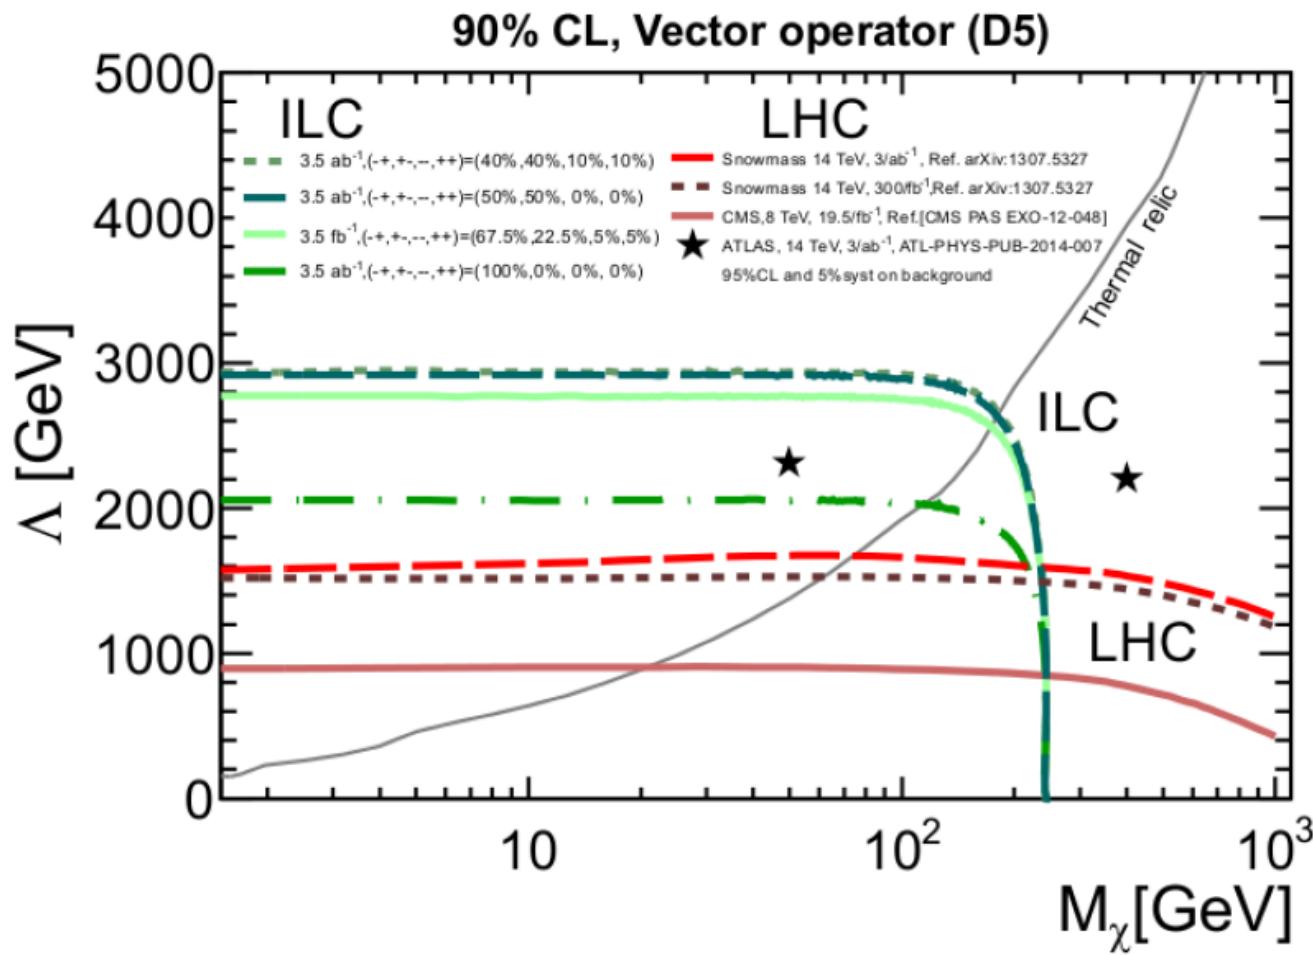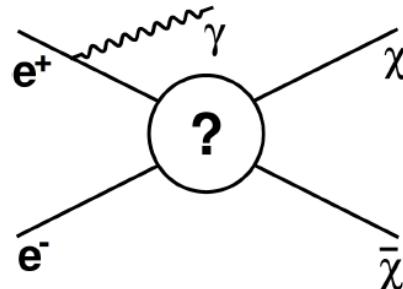

EW Precision Measurements at $\sqrt{s} = 91$ & 160 GeV

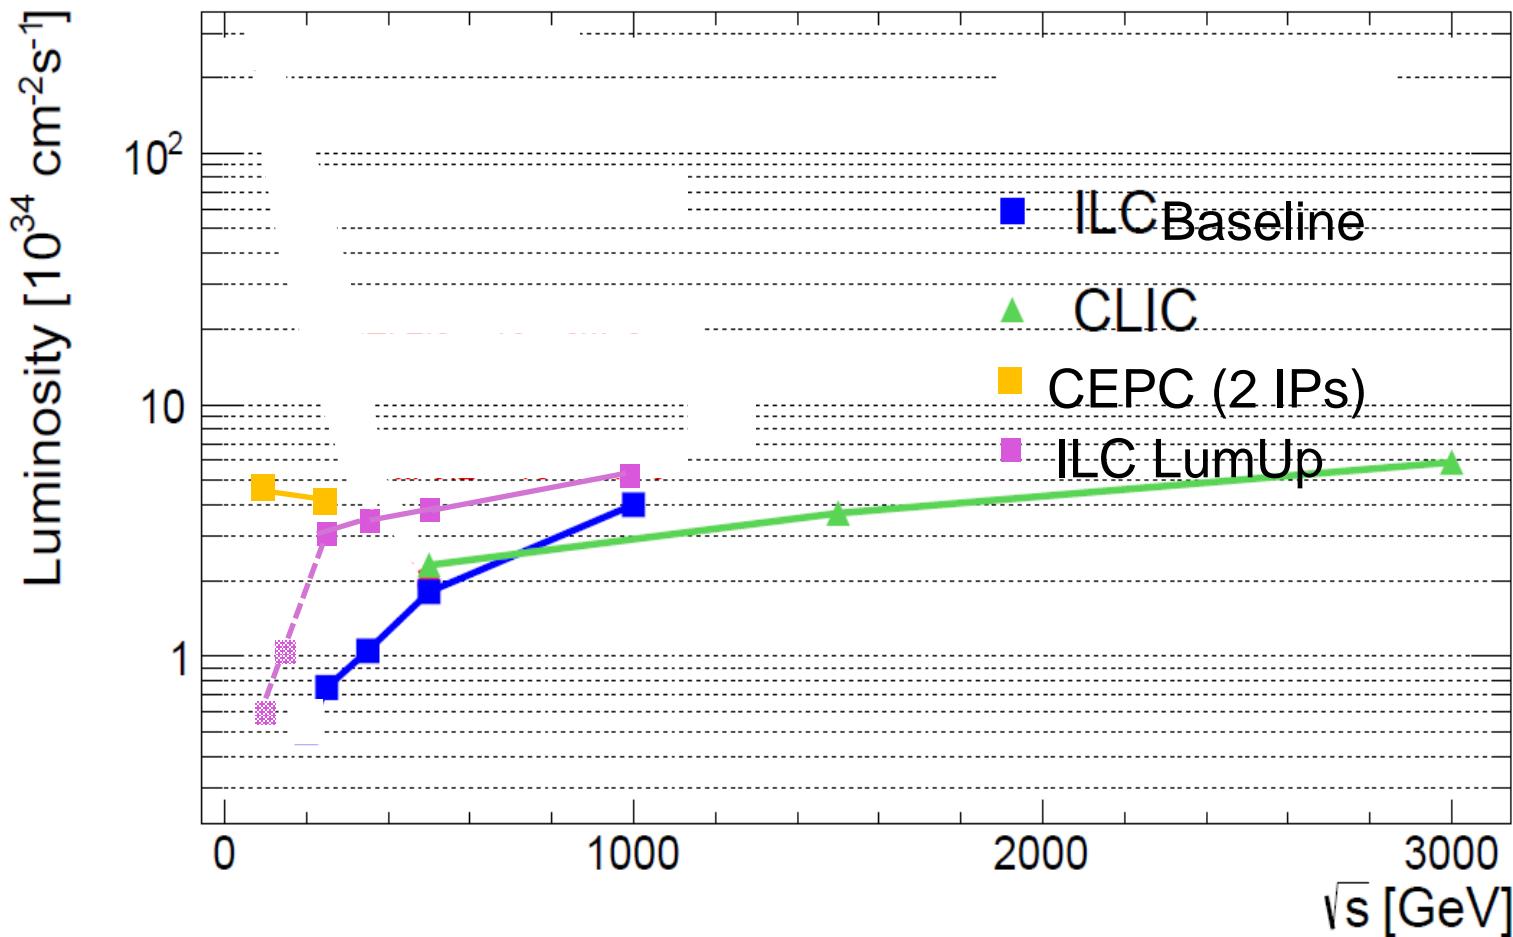

Currently no ILC design for $\sqrt{s} = 90, 160 \text{ GeV}$. Not easy to run the ILC at these energies.

e.g. 150 GeV (125 GeV) e^- beam needed for positron production in baseline (lumi upgrade) design.

A reasonable design goal might be $L=5 \times 10^{33}$ @ 91 GeV and $L=1 \times 10^{34}$ @ 160 GeV in the lumi upgrade config.

This would provide $\int L dt = 100 \text{ fb}^{-1}$ @ 91 GeV in 8mos. and $\int L dt = 200 \text{ fb}^{-1}$ @ 160 GeV in 8 mos.

EW Precision Measurements with CEPC & ILC


	CEPC 91 +160 GeV $100 + 500 \text{ fb}^{-1}$	ILC 91 + 160 GeV $100 + 200 \text{ fb}^{-1}$
ΔA_{LR}	–	1×10^{-4}
$\Delta \sin^2 \theta_W^{eff}$	2.7×10^{-5}	1.3×10^{-5}
ΔM_z	0.5 MeV	1.6 MeV
$\Delta \Gamma_z$	0.5 MeV	0.5 MeV
$\Delta \alpha_s(M_z^2)$	1.0×10^{-4}	5.0×10^{-4}
ΔN_ν	0.001	0.004
ΔA_b	–	0.001
$\Delta R_b \equiv \Delta \frac{\Gamma_b}{\Gamma_{had}}$	1.7×10^{-4}	1.4×10^{-4}
$\Delta R_l \equiv \Delta \frac{\Gamma_{had}}{\Gamma_l}$	0.007	–
ΔM_W	2.5 MeV	4 MeV

Note : This is probably the maximum integrated luminosity at these energies during the lifetime of the ILC. On the other hand CEPC can readily accumulate much more luminosity at these energies.


Higgs Physics

ILC Measurement of $\sigma(e^+e^- \rightarrow ZH)$ $\sqrt{s} = 250$ GeV


Higgs Recoil Measurement of Higgs Mass and Higgstrahlung Cross Section

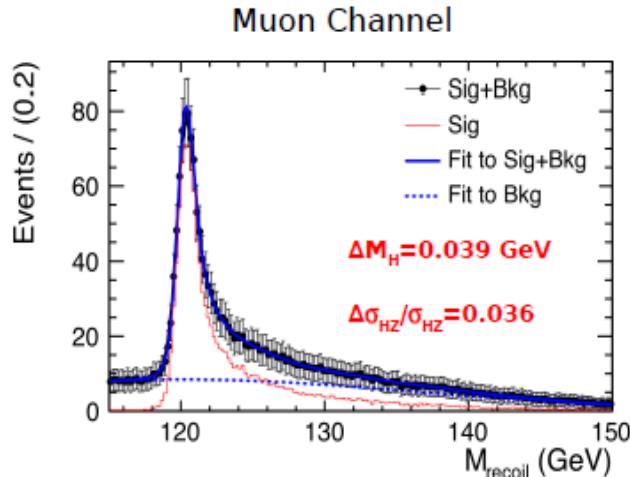

Very Precise Measurement
S/B = 8 in Peak Region

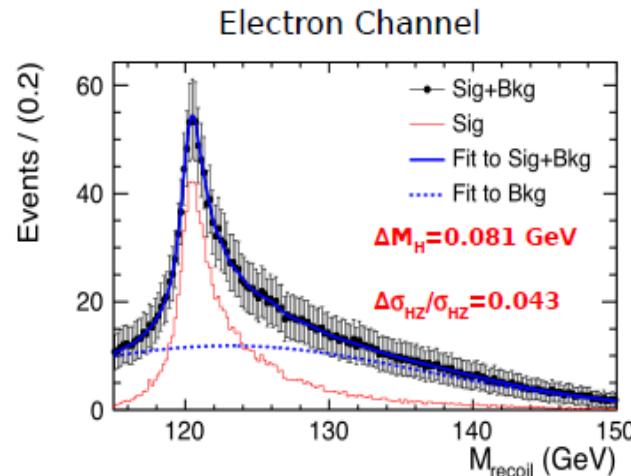

Less Precise
Bremsstrahlung in detector material

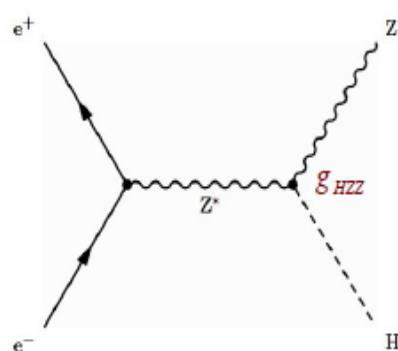


ILC: $\Delta M_H = .032$ GeV, $\Delta \sigma_{HZ} / \sigma_{HZ} = 2.5\%$ for $L = 250 \text{ fb}^{-1}$
 $\Delta M_H = .015$ GeV, $\Delta \sigma_{HZ} / \sigma_{HZ} = 1.2\%$ for $L = 1150 \text{ fb}^{-1}$

$$\sigma_{HZ} \sim g_{HZZ}^2$$

$$\Rightarrow \Delta g_{HZZ} / g_{HZZ} = 1.3\% \text{ (0.6\%)} \text{ for } L = 250 \text{ (1150) } \text{fb}^{-1}$$

$$e^+ e^- \rightarrow ZH, \nu\nu H \sqrt{s} = 350 \text{ GeV}$$

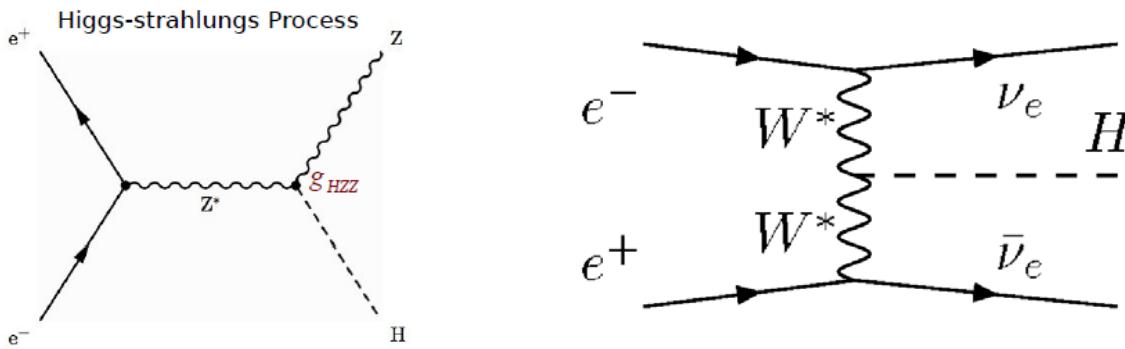


All of the Higgstrahlung studies that were done at $\sqrt{s} = 250$ GeV can also be done at $\sqrt{s} = 350$ GeV. Precisions for $\sigma \cdot BR$ are comparable, as is the precision for $\sigma(ZH)$ once $Z \rightarrow q\bar{q}$ decays are included.

WW fusion production of the Higgs at $\sqrt{s} = 350$ GeV provides a much better measurement of g_{HWW} compared to $\sqrt{s} = 250$ GeV. This gives a much improved estimate of the total Higgs width Γ_H which in turn significantly improves the coupling errors obtained from $\sigma \cdot BR$ measurements made at $\sqrt{s} = 250$ GeV.

The recoil Higgs mass measurement is significantly worse at $\sqrt{s} = 350$ GeV with respect to $\sqrt{s} = 250$ GeV. However, there is hope that direct calorimeter Higgs mass measurements using $e^+e^- \rightarrow \nu\nu H$ will recover the precision.

$$e^+ e^- \rightarrow ZH, \nu\nu H, t\bar{t}H, ZHH \quad \sqrt{s} = 500 \text{ GeV}$$

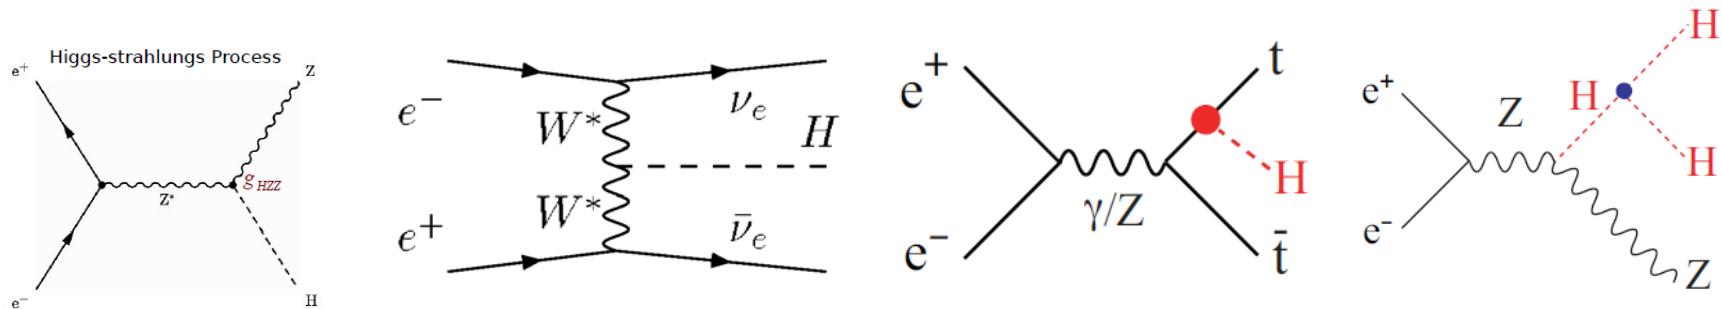


The g_{HWW} coupling can also be measured well at $\sqrt{s} = 500$ GeV through WW fusion production of the Higgs. Also the measurement of $\sigma(e^+e^- \rightarrow \nu\nu H) \times BR(H \rightarrow X)$ can be made for many Higgs decay modes $H \rightarrow X$.

Through $e^+e^- \rightarrow ttH$ the top Yukawa coupling can be measured to $\Delta y_t / y_t = 16.6\%$ with 500 fb^{-1} at $\sqrt{s} = 500 \text{ GeV}$. With same luminosity at $\sqrt{s} = 550 \text{ GeV}$ the precision is $\Delta y_t / y_t = 6.73 \Rightarrow$ **strong motivation to increase nominal energy to $\sqrt{s} = 550 \text{ GeV}$**

The ZHH channel is open at $\sqrt{s} = 500 \text{ GeV}$. The Higgs self coupling can be measured to 27% with 4 ab^{-1} assuming the true value is the SM value.


$e^+e^- \rightarrow \nu\nu H, \; ttH, \; \nu\nu HH$ ILC Energy Upgrade $\sqrt{s} = 1 \text{ TeV}$

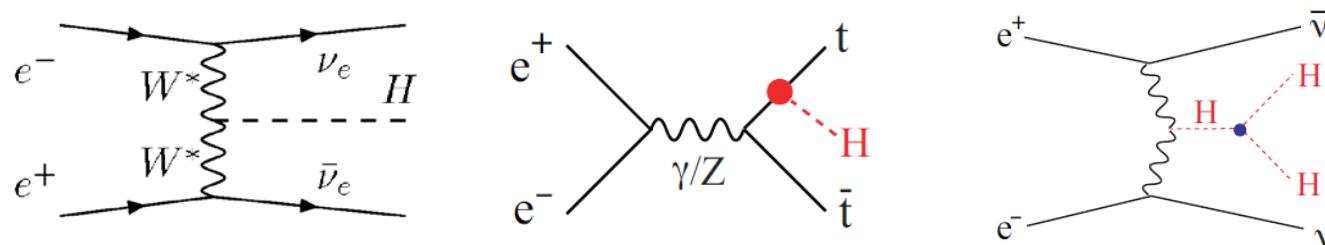

At $\sqrt{s} = 1 \text{ TeV}$ the ILC provides better measurements of the top Yukawa coupling and Higgs self coupling. For example the Higgs self coupling can be measured to an accuracy of 10% with 4 ab^{-1} at $\sqrt{s} = 1 \text{ TeV}$ (again, assuming the true value is the SM value).

Search for additional Higgs bosons that might have been missed at LHC.

In addition, the ILC becomes a Higgs factory again since the total Higgs cross section is larger than the total cross sections at 250 GeV, specially if polarized beams are used:


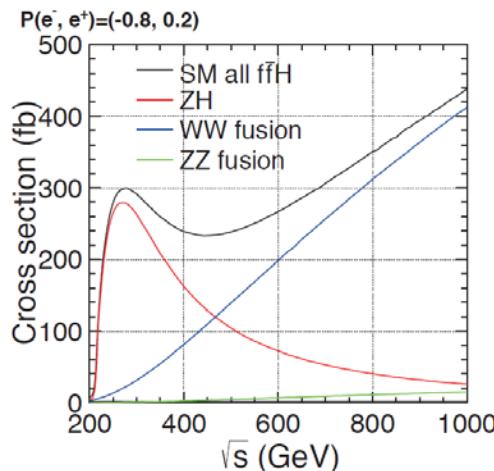


Summary of ILC Higgs Measurement Precisions


From "500 GeV ILC Operating Scenarios" arXiv :1506.07830

$\int \mathcal{L} dt$ at \sqrt{s}	250 fb^{-1} at 250 GeV	330 fb^{-1} at 350 GeV		500 fb^{-1} at 500 GeV			
$P(e^-, e^+)$	(-80%, +30%)						
production	Zh	$v\bar{v}h$	Zh	$v\bar{v}h$	Zh	$v\bar{v}h$	$t\bar{t}h$
$\Delta\sigma/\sigma$	[39] 2.0%	-	[10,40] 1.6%	-	3.0	-	-
BR(invis.) [41]	< 0.9%	-	< 1.2%	-	< 2.4%	-	-
decay	$\Delta(\sigma \cdot BR) / (\sigma \cdot BR)$						
$h \rightarrow bb$	1.2%	10.5%	1.3%	1.3%	1.8%	0.7%	28%
$h \rightarrow c\bar{c}$	8.3%	-	9.9%	13%	13%	6.2%	-
$h \rightarrow gg$	7.0%	-	7.3%	8.6%	11%	4.1%	-
$h \rightarrow WW^*$	6.4%	-	6.8%	5.0%	9.2%	2.4%	-
$h \rightarrow \tau^+\tau^-$	[42] 3.2%	-	[43] 3.5%	19%	5.4%	9.0%	-
$h \rightarrow ZZ^*$	19%	-	22%	17%	25%	8.2%	-
$h \rightarrow \gamma\gamma$	34%	-	34%	[44] 39%	34%	[44] 19%	-
$h \rightarrow \mu^+\mu^-$ [45]	72%	-	76%	140%	88%	72%	-

ILC Higgs Coupling Precision vs Time

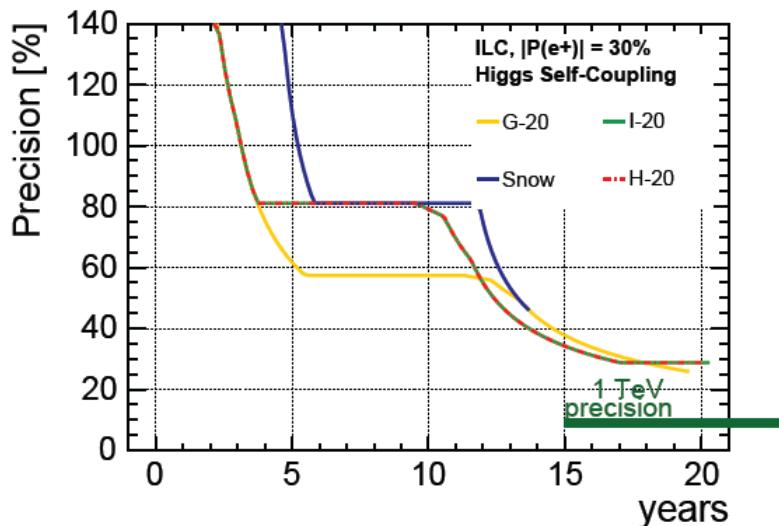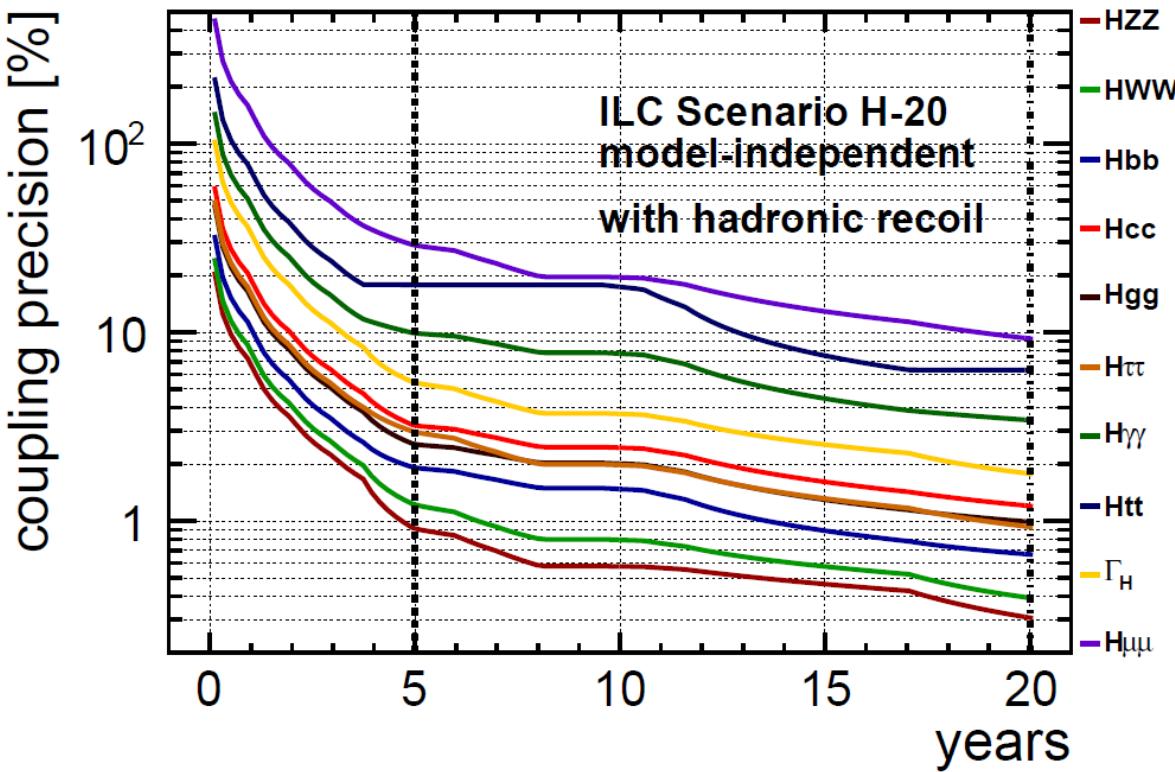


- ILC 250+350+500 GeV with $340+200+1000 \text{ fb}^{-1}$ (G-20 scenario at 8.1 yrs)
- CEPC 250 GeV with 5000 fb^{-1}
- ILC + CEPC under the conditions listed above

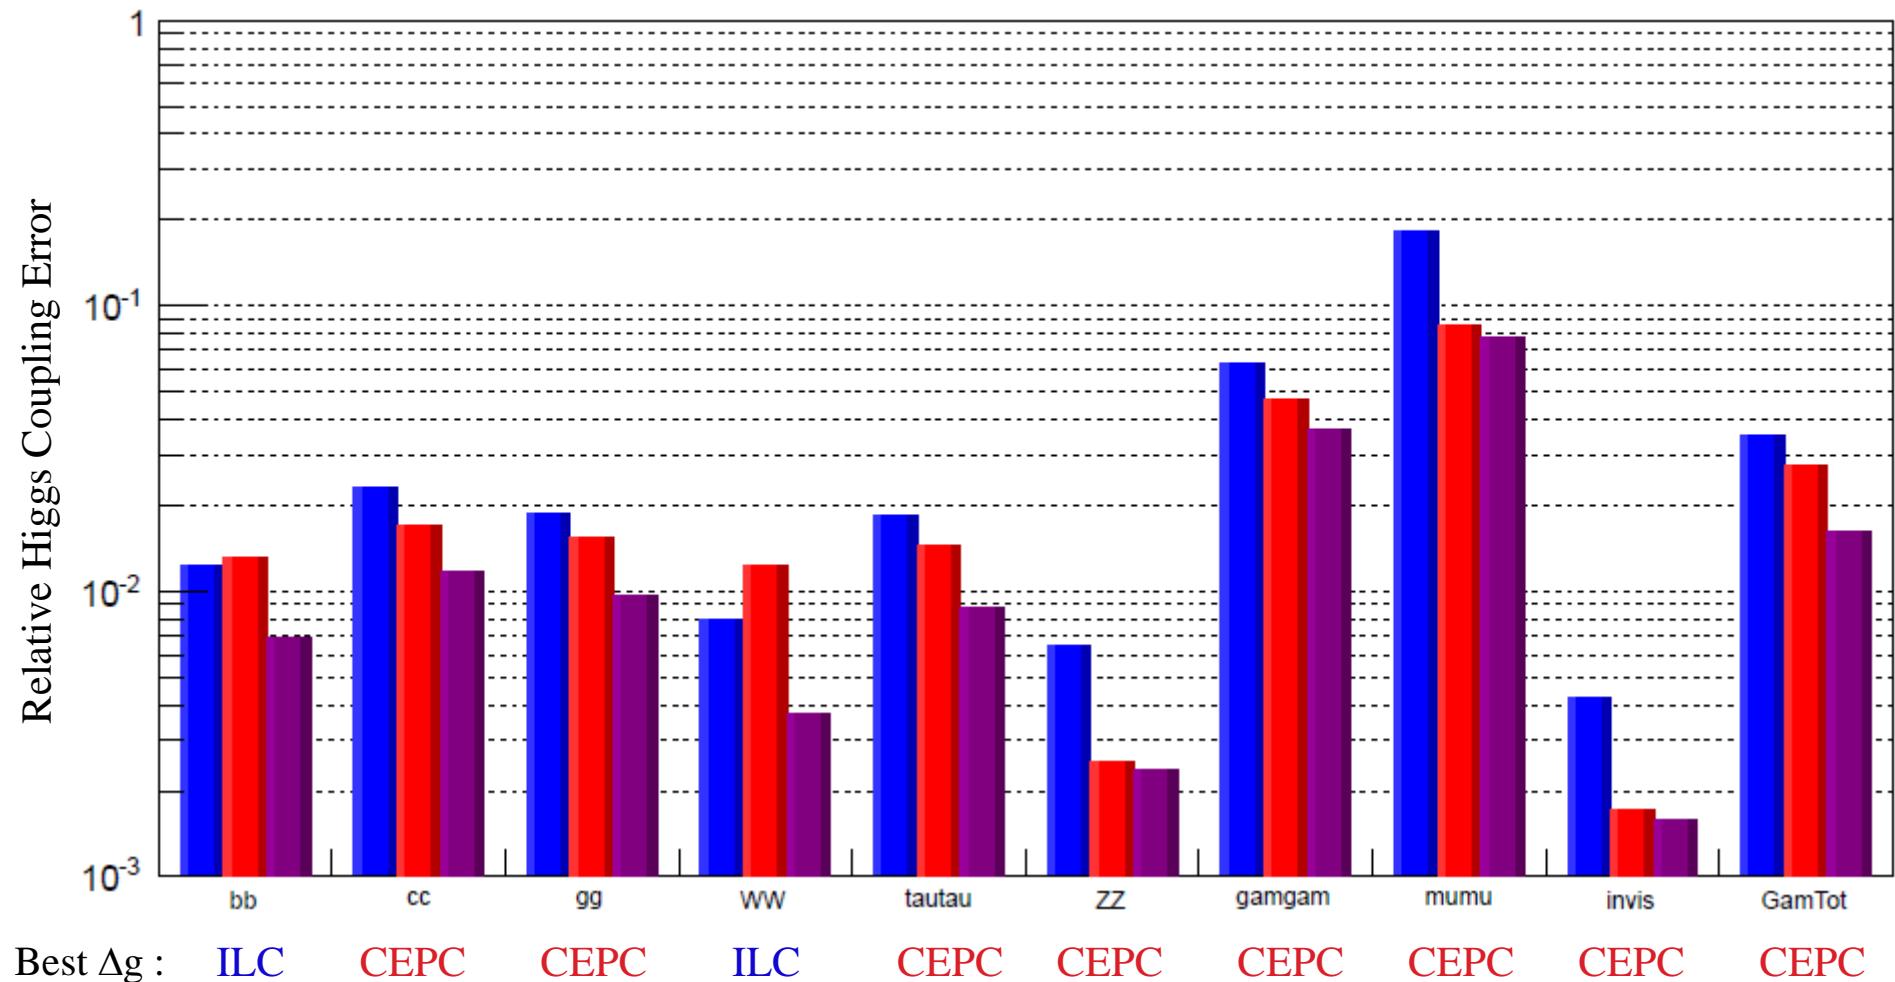

ILC 250+350+500 GeV with 500+200+500 fb^{-1} (H-20 scenario at 8.1 yrs)


CEPC 250 GeV with 5000 fb^{-1}

ILC + CEPC under the conditions listed above

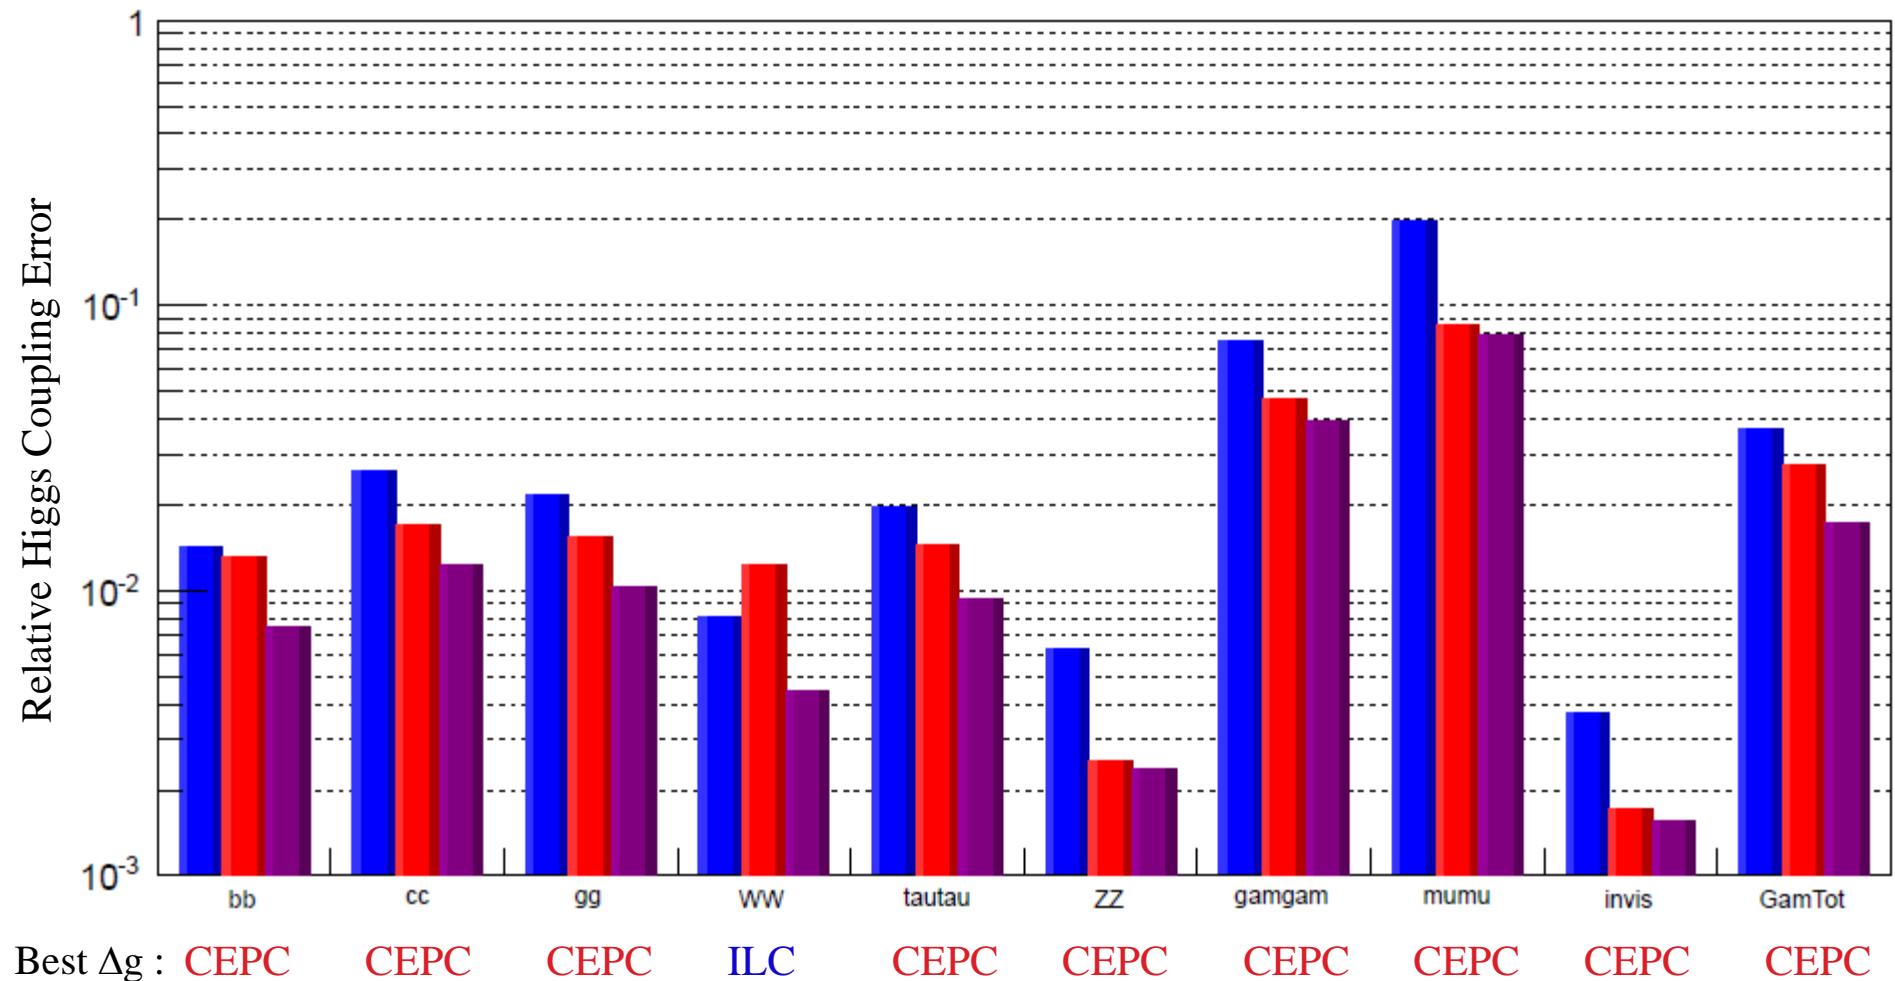

Best Δg : CEPC CEPC CEPC ILC CEPC CEPC CEPC CEPC CEPC CEPC


- ILC 250+350+500 GeV with $500+200+5000 \text{ fb}^{-1}$ (G-20 scenario full run $\Rightarrow 19.7 \text{ yrs}$)
- CEPC 250 GeV with 5000 fb^{-1}
- ILC + CEPC under the conditions listed above

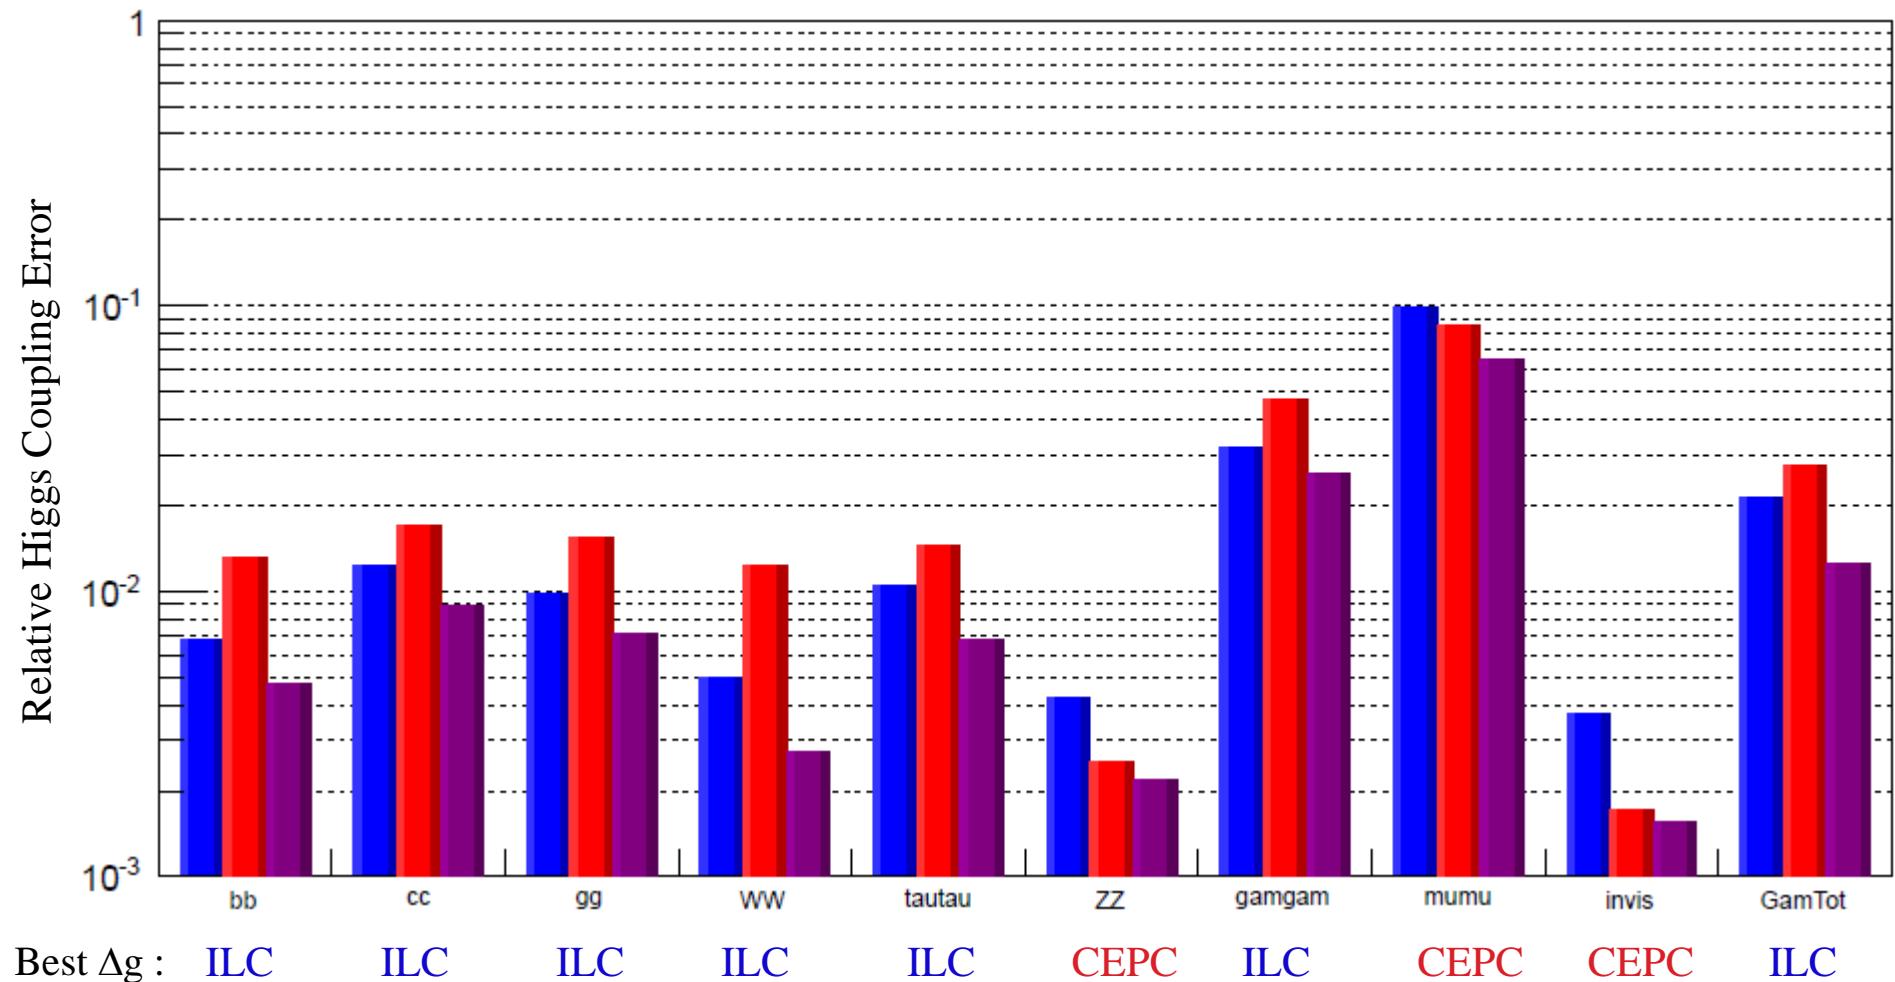

ILC 250+350+500 GeV with 2000+200+4000 fb^{-1} (H-20 scenario full run \Rightarrow 20.2 yrs)

CEPC 250 GeV with 5000 fb^{-1}

ILC + CEPC under the conditions listed above

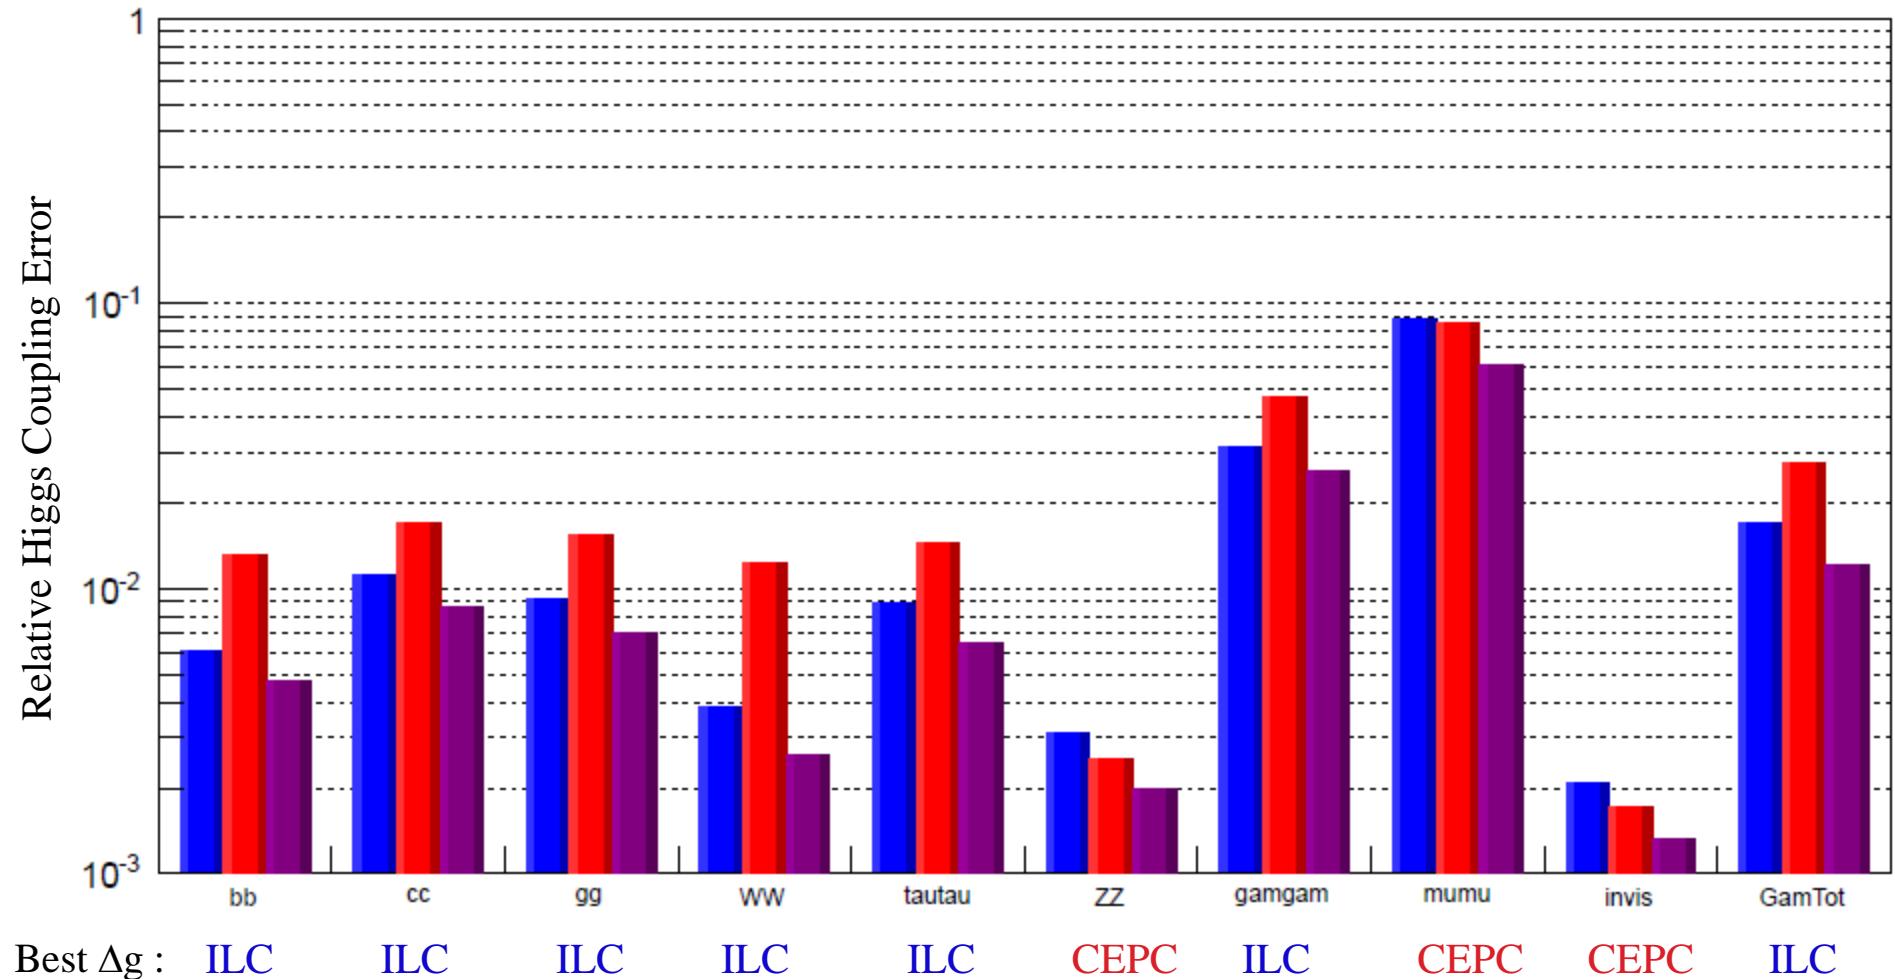


Best Δg : ILC ILC ILC ILC ILC CEPC ILC CEPC CEPC ILC

ILC 250+350+500 GeV with 340+200+1000 fb^{-1} (G-20 scenario at 8.1 yrs)

CEPC 250 GeV with 5000 fb^{-1}

ILC + CEPC under the conditions listed above

How does ILC help CEPC in a situation where
CEPC has (mostly) the best individual results?

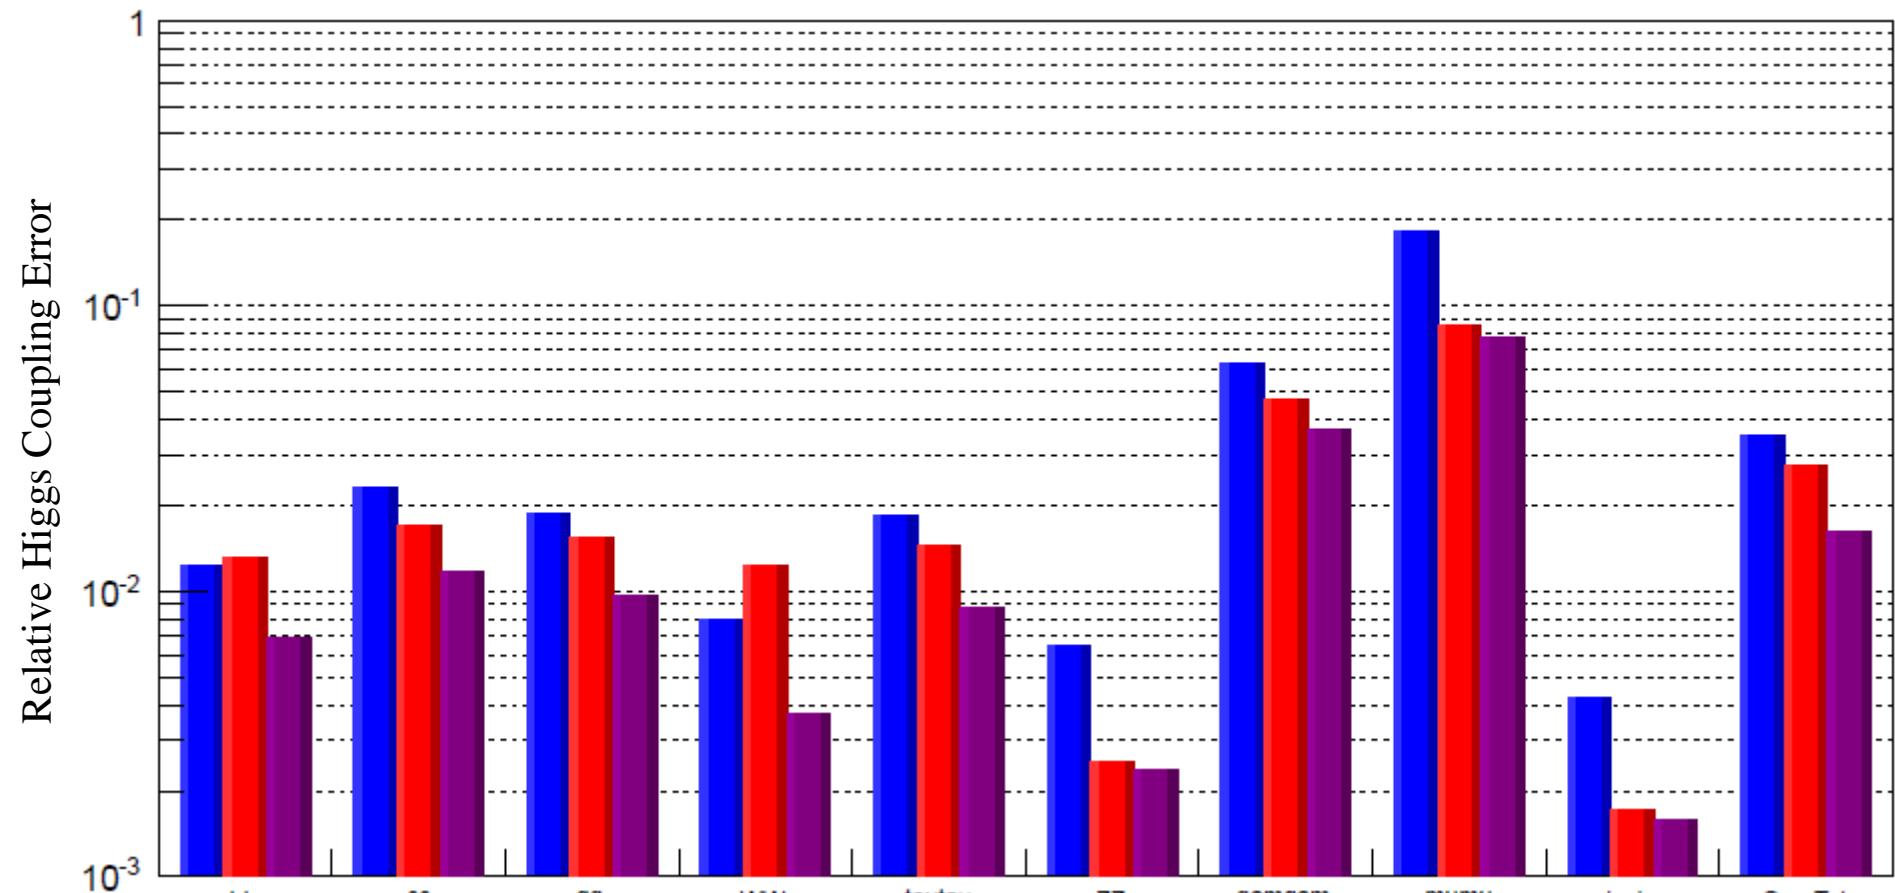

$\frac{\text{CEPC } \Delta g}{\text{Comb. } \Delta g}$	1.91	1.45	1.58	3.26	1.63	1.07	1.26	1.11	1.08	1.70
Extra CEPC* Running (yr)	26.5	11.0	15.0	96.3	16.6	1.4	5.9	2.3	1.7	18.9


*Additional CEPC running required to match ILC contribution to Combination. Assumes all extra running at $\sqrt{s} = 250$ GeV

ILC 250+350+500 GeV with 2000+200+4000 fb^{-1} (H-20 scenario full run \Rightarrow 20.2 yrs)

CEPC 250 GeV with 5000 fb^{-1}

ILC + CEPC under the conditions listed above

How does CEPC help ILC in a situation where ILC has (mostly) the best individual results?

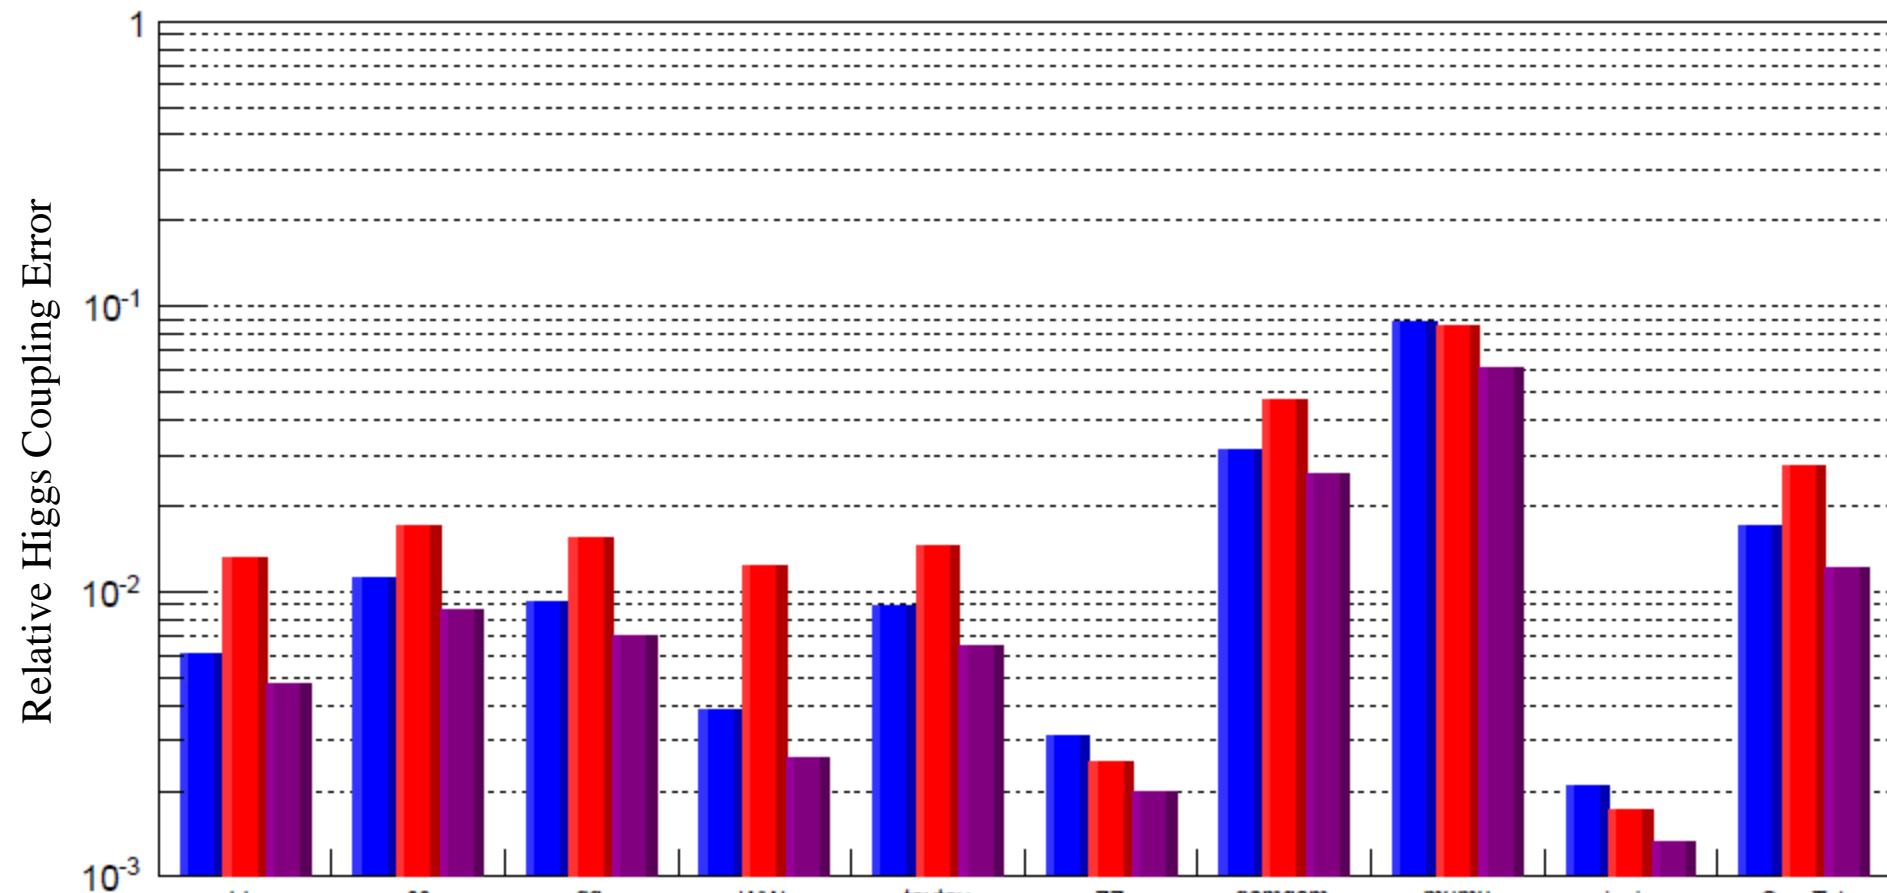

$\frac{\text{ILC } \Delta g}{\text{Comb. } \Delta g}$	1.28	1.31	1.31	1.47	1.37	1.58	1.21	1.44	1.58	1.42
Extra ILC* Running (yr)	10.4	10.4	10.4	10.4	10.4	10.4	10.4	10.4	10.4	10.4

*Additional ILC running required to match CEPC contribution to Combination. Assumes all extra running at $\sqrt{s} = 250 \text{ GeV}$

Highlights of Combination of CEPC with ILC G-20 @ 8.1 yrs

	CEPC	ILC+CEPC
Δg_{HZZ}	0.26%	\Rightarrow 0.22%
Δg_{HWW}	1.22%	\Rightarrow 0.38% *
Δg_{Hbb}	1.30%	\Rightarrow 0.68%
$\Delta g_{H\tau\tau}$	1.44%	\Rightarrow 0.88%
Δg_{Hgg}	1.53%	\Rightarrow 0.97%


* Might be interesting to include $\sigma(WW \rightarrow H)$ in precision Higgs analyses

Highlights of Combination of CEPC with ILC H-20 @ 20 yrs

	CEPC	ILC+CEPC
Δg_{HZZ}	0.26%	\Rightarrow 0.20%
Δg_{HWW}	1.22%	\Rightarrow 0.26% *
Δg_{Hbb}	1.30%	\Rightarrow 0.47%
$\Delta g_{H\tau\tau}$	1.44%	\Rightarrow 0.65%
Δg_{Hgg}	1.53%	\Rightarrow 0.70%

* Again, might be interesting to include $\sigma(WW \rightarrow H)$ in precision Higgs analyses

CEPC Higgs Self Coupling Measurement at Ecm=240 GeV

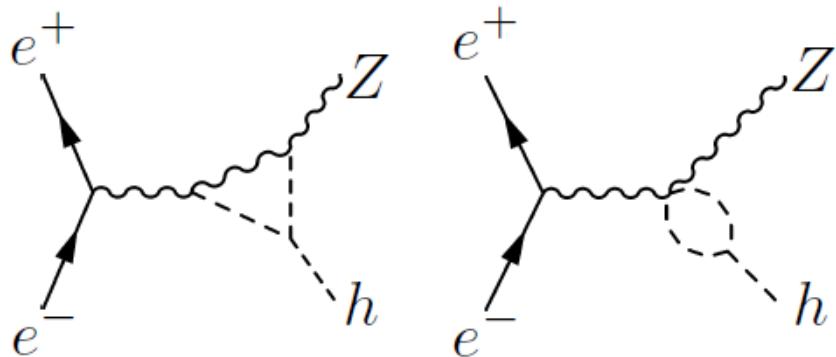

M. McCullough, arXiv:1312.3322

$$\delta_{\sigma}^{240} = 100 (2\delta_Z + 0.014\delta_h) \%$$


g_{hZZ} fixed to SM value ($\delta_z = 0$)

g_{hhZZ} fixed to SM value

$$\Rightarrow \delta_H = \frac{\delta_{\sigma}^{240}}{0.014} = \frac{0.0051}{0.014} = 36\%$$

Note : Oft quoted 30% error comes from combining CEPC with 50% HL-LHC meas.

CEPC Higgs Self Coupling Measurement at Ecm=240 GeV

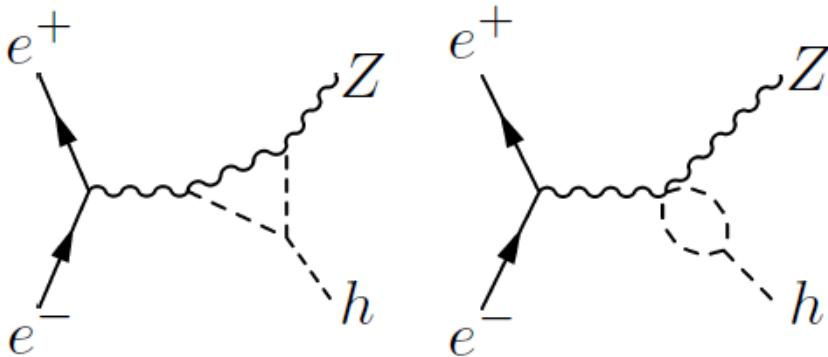

M. McCullough, arXiv:1312.3322

$$\delta_{\sigma}^{240} = 100(2\delta_Z + 0.014\delta_h)\%$$


g_{hZZ} fixed to SM value ($\delta_z = 0$)

g_{hhZZ} fixed to SM value


$$\Rightarrow \delta_H = \frac{\delta_{\sigma}^{240}}{0.014} = \frac{0.0051}{0.014} = 36\%$$

Examples of
BSM physics
with $\delta_z \neq 0$:

Neutral scalar partners

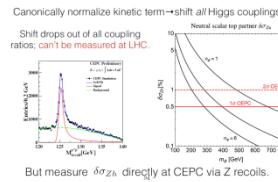

But measure $\delta\sigma_{Zh}$ directly at CEPC via Z recoils.

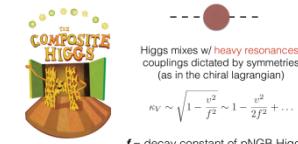


Higgs mixes w/ **heavy resonances**,
couplings dictated by symmetries
(as in the chiral lagrangian)

$$\kappa_V \sim \sqrt{1 - \frac{v^2}{f^2}} \sim 1 - \frac{v^2}{2f^2} + \dots$$

f = decay constant of pNGB Higgs


Coupling deviation contributes to precision electroweak
Pre-LHC constraints as good
as reach of LHC Higgs coupling measurements

Neutral fermionic partners
e.g. Twin Higgs



f sets mass scale for neutral
top partners: definitive and test of "neutral" naturalness.


Results: Inert Doublet

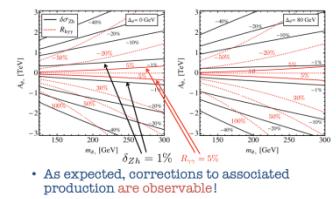

As expected, corrections to associated production are observable!

Note: Oft quoted 30% error comes from combining CEPC with 50% HL-LHC meas.

ILC Higgs Self Coupling Measurement at Ecm=500 GeV

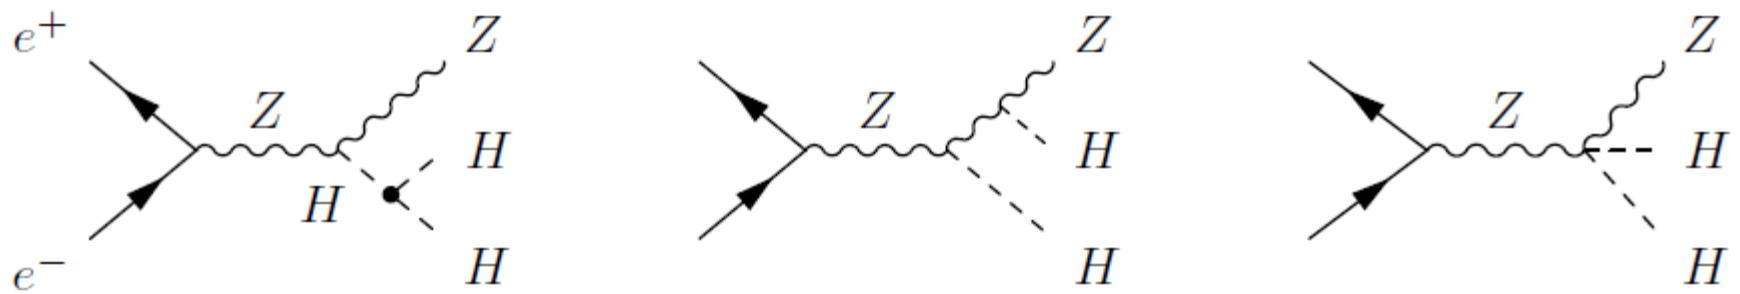

g_{hZZ} fixed to value from $\sigma(ZH)$ measurement

g_{hhZZ} fixed to SM value ← Needs to be more fully addressed in ILC studies

Extract g_{hhh} from measurement of $\sigma(ZHH)$

using $HH \rightarrow b\bar{b}b\bar{b}$ & $b\bar{b}W^+W^-$

$$\frac{\Delta\sigma(ZHH)}{\sigma(ZHH)} = 16\% \Rightarrow \frac{\Delta g_{hhh}}{g_{hhh}} = 27\% \text{ for ILC scenario H-20 @ 20 years.}$$

Note : This assumes SM g_{HHH} . If $g_{HHH} = 2 \times \text{SM}$ then $\frac{\Delta g_{hhh}}{g_{hhh}} = 27\% \Rightarrow \frac{\Delta g_{hhh}}{g_{hhh}} = 14\%$.

Other Higgs Measurements with CEPC & ILC G-20 at 8.1 yrs

	CEPC 250 GeV 5000 fb^{-1}	ILC $250 + 350 + 500 \text{ GeV}$ $500 + 250 + 500 \text{ fb}^{-1}$	Combined
Δm_H	5.9 MeV	25 MeV	5.7 MeV
$\frac{\Delta g_{HHH}}{g_{HHH}}$	36 %	76 %	33 %
$\frac{\Delta g_{ttH}}{g_{ttH}}$	—	16.6 %	16.6 %
$\frac{\Delta g_{ttH}^{(*)}}{g_{ttH}}$	—	6.7 %	6.7 %

* Assumes ILC 500 GeV running actually takes place at $\sqrt{s} = 550 \text{ GeV}$

Other Higgs Measurements with CEPC & ILC H-20 at 20 yrs

	CEPC 250 GeV 5000 fb^{-1}	ILC 250 + 350 + 500 GeV $2000 + 250 + 4000 \text{ fb}^{-1}$	<i>Combined</i>
Δm_H	5.9 MeV	12.5 MeV	5.3 MeV
$\frac{\Delta g_{HHH}}{g_{HHH}}$	36 %	27 %	22 %
$\frac{\Delta g_{tH}}{g_{tH}}$	—	5.9 %	5.9 %
$\frac{\Delta g_{tH}^{(*)}}{g_{tH}}$	—	2.4 %	2.4 %

^(*) Assumes ILC 500 GeV running actually takes place at $\sqrt{s} = 550 \text{ GeV}$

Summary

- ▶ ILC helps CEPC:
 - A_{LR} measurement and top mass
 - Precise g_{HWW} measurement reduces errors on all Higgs couplings
 - Top Yukawa coupling
 - ILC $\sigma(ZHH)$ measurement (and others I assume) help interpret precision CEPC $\sigma(ZH)$ meas.
 - New particle searches at 500 GeV
- ▶ CEPC helps ILC:
 - Many EW precision measurements: M_Z , Γ_Z , α_S , Nv , MW , ...
 - Precise g_{HZZ} measurement reduces errors on all Higgs couplings
 - Much better meas. of Higgs invisible width, BSM decays, rare decays such as $\gamma\gamma$ and $\mu\mu$
 - In general, CEPC gives ILC more flexibility to concentrate on higher E_{cm} running.
- ▶ CEPC+ILC combination helps the particle physics community:
 - Higgs Z coupling error $\Delta g_{HZ} = 0.2\%$
 - Higgs W coupling error $\Delta g_{WW} = 0.3\%$
 - Higgs b coupling error $\Delta g_{bb} = 0.5\%$
 - Higgs self coupling error $\Delta g_{HHH} = 22\%$