

# CLIC-based $\gamma\gamma$ collider

Edu Marin

special thanks to Daniel Schulte

April 23<sup>rd</sup>, 2017

**ICFA Mini-Workshop on Future gamma-gamma Collider  
Tsinghua University, Beijing (China)**

[emarinla@cern.ch](mailto:emarinla@cern.ch)



# Outline

## 1 CLIC Project

## 2 $\gamma\gamma$ -Collider

- 380 GeV
  - Luminosity
  - Background
  - Optimization
- 3 TeV
  - Luminosity
  - Background
  - Optimization

## 3 Conclusions


# CLIC Project

# Project

2-beam scheme allows to sustain a gradient of 100 MeV/m



Footprint < 50 km for collisions at  $E_{CM} = 3 \text{ TeV}$

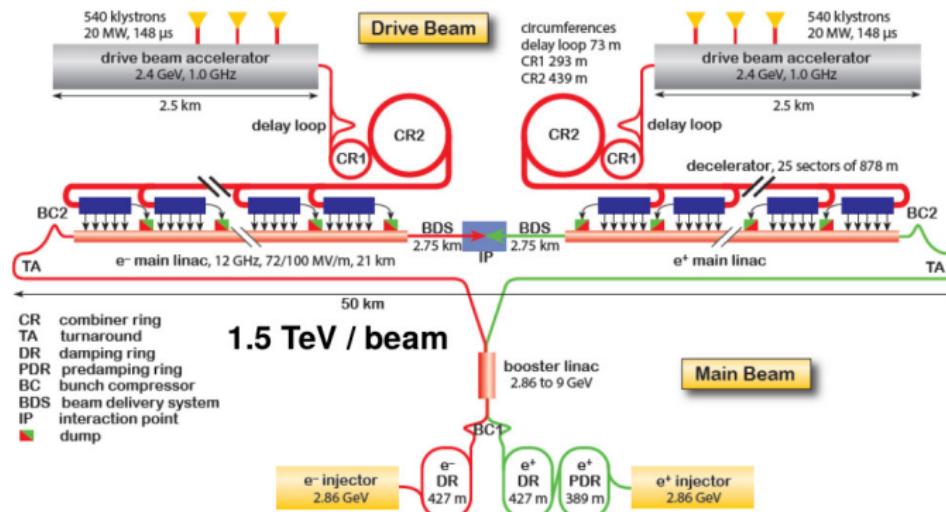

CLIC is the only  $e^-e^+$  LC capable of reaching multi-TeV

# CERN Strategy



## Scientific strategy: 3 main directions

F. Gianotti,

A great year ahead of us



### Full exploitation of the LHC:

- successful Run 2 (~100 fb<sup>-1</sup> of good data) and LS2
- construction of LIU/HL-LHC on track and financially secured (accelerator and experiments)

### Complementary diverse programme serving a broad community, e.g.:

- ongoing experiments and projects at Booster, PS, SPS and their upgrades (ELENA, HIE-ISOLDE 2)
- participation in (global) neutrino projects outside Europe (presently mainly LBNF in the US) through CERN Neutrino Platform

### Preparation for the future of CERN (and of the discipline):

- vibrant accelerator R&D programme exploiting CERN's strengths and uniqueness  
(> enhance worldwide coordination)
- design studies for future accelerators: CLIC, FCC (including HE-LHC\*)
- develop a compelling diverse scientific programme complementary to high-E colliders  
→ "Physics with injectors" WG (involving accelerator experts, experimentalists, theorists) is being set up → explore future exciting opportunities (beam dump experiments, precision measurements, etc.) using unique capabilities of CERN's rich accelerator complex, complementary to other efforts in the world → produce report by ~ 2018

## CLIC Strategy

### Preparing input for European Strategy Particle Physics 2020

- Project Plan for CLIC as a strong post-LHC option
  - Suited for conducting precise studies of potential LHC findings
- Initial costs compatible with CERN budget
  - Cost optimization from 380 GeV  $\Rightarrow$  3 TeV
  - Reduce power consumption
    - High-efficiency Klystrons (380 GeV case)
    - Permanent magnets (3 TeV case)
- Upgradeable in stages over 20-30 years

↓ "Rebaselining"<sup>†</sup> ↓

Optimize machine design w.r.t. cost and power for a staged approach to reach multi-TeV scale

---

<sup>†</sup> Updated baseline for a staged CLIC, CERN-2016-004, arXiv:1608.07537

## Parameters

Parameter	Unit	380 GeV	1.5 TeV	3 TeV
Total Lumi. ( $\mathcal{L}$ )	[ $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ ]	1.5	3.7	5.9
Peak Lumi. ( $\mathcal{L}_{\text{peak}}$ )	[ $10^{34} \text{ cm}^{-2}\text{s}^{-1}$ ]	0.9	1.4	2.0
IP beam size ( $\sigma_{x/y}^*$ )	[nm]	149/2.9	60/1.5	45/1.0
Emittance ( $\gamma\epsilon_{x/y}$ )	[nm]	920/20	660/20	660/20
Bunch Charge ( $Q$ )	[ $10^9$ ]	5.2	3.72	3.72
Bunch length ( $\sigma_z$ )	[ $\mu\text{m}$ ]	70	44	44
Linac Rep. Freq.	[Hz]	50	50	50
# Bunches / train		352	312	312
Bunch separation	[ns]	0.5	0.5	0.5
Acc. Gradient	[MV/m]	72	100	100
Site Length	[km]	11	29	50
Total site power	[MW]	252	364	589

Efforts are put to reduce cost and power consumption at all stages

## Parameters II

Parameter choices are determined by beam dynamics studies;


- $Q$ ,  $\sigma_z$  and bunch spacing are limited by wakefield in the ML
- $\epsilon_x$  is mainly determined by the DR as a function of  $Q$
- $\epsilon_y$  is given by the DR, RTML, ML and BDS
- $\sigma_y^*$  is determined by FFS
- $\sigma_x^*$  has two sources for the lower limit
  - FFS
  - beamstrahlung effect  $\Rightarrow Q, \mathcal{L}$ -spectrum

Thinking forward to  $\gamma\gamma$ -collider:

- Only clear parameter which could be further pushed is  $\sigma_x^*$   
What is then the limitation from FFS?
- Other parameters may be optimised
  - Different parameters choice may provide an overall  $\mathcal{L}$  gain, despite compromising one of the mentioned variables


## Stages

- The accelerator is foreseen to be built in three stages with centre-of-mass energies of 380 GeV, 1.5 TeV and 3 TeV
- At each energy stage the centre-of-mass energy can be tuned to lower values ( $\approx 1/3$ ), with limited loss of luminosity

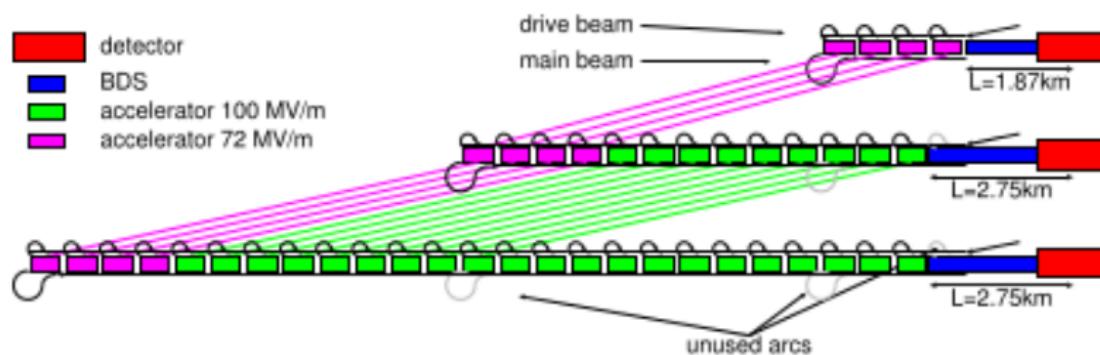


- Only 1 DB is required for feeding both ML at  $E_{\text{CM}} \leq 1.5\text{ TeV}$

# Site

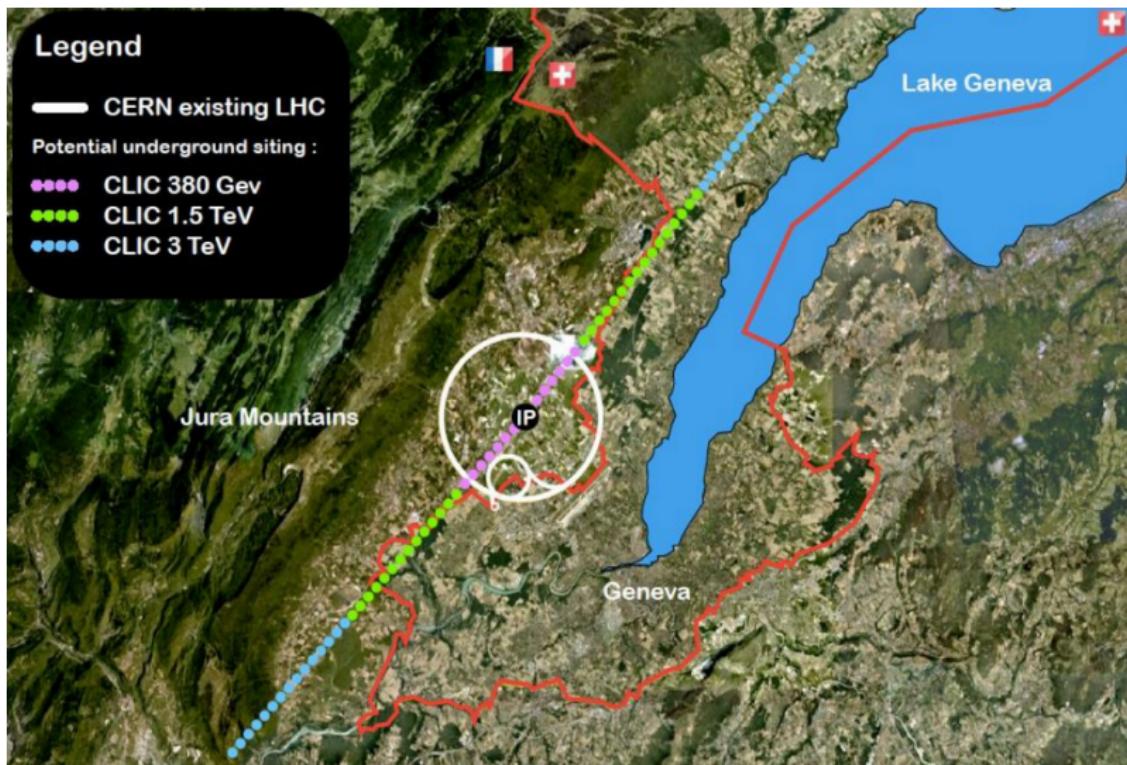

## Run Model

- The overall duration of the three-stage programme is 22 years
- 3 energy stages (0.38/1.5/3.0) each lasting 7, 5 and 6 years

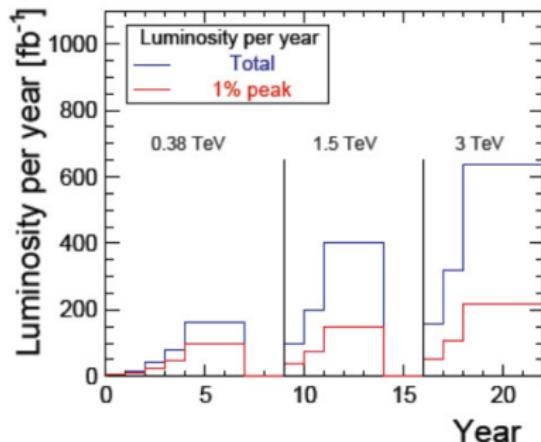

Stage	$\sqrt{s}$ (GeV)	$\mathcal{L}_{\text{int}}$ (fb <sup>-1</sup> )
1	380	500
	350	100
2	1500	1500
3	3000	3000

- Initial 7 years of construction
- 2 years upgrade periods between stages

# $\gamma\gamma$ -Collider

## Codes Implemented

- PLACET is used to obtain particle distribution at the IP
- Scatter<sup>†</sup> function written in c
  - IP beam is backtracked to conversion plane ( $\approx 1$  mm upstream)
  - Interaction with the laser
  - Scattered electrons and hard photons propagated to IP
- GUINEA-PIG calculates luminosity
  - for  $e^-e^-$ ,  $e^-\gamma$ ,  $\gamma\gamma$
  - Coherent and incoherent pairs
  - Photons production
  - Hadrons
- PYTHIA tracks hadrons (*not yet implemented*)

PLACET and GUINEA-PIG have been cross-checked with similar codes (Elegant, MAD) or CAIN respectively, with reasonable agreement

---

<sup>†</sup>more details in D. Shulte, *TESLA-Report 1997-08*.

380 GeV

# CLIC FFS Parameters


Parameter	Unit	380 GeV
Total Lumi. ( $\mathcal{L}$ )	[ $10^{34} \text{ cm}^{-2} \text{s}^{-1}$ ]	1.5
Peak Lumi. ( $\mathcal{L}_{\text{peak}}$ )	[ $10^{34} \text{ cm}^{-2} \text{s}^{-1}$ ]	0.9
IP beam size ( $\sigma_{x/y}^*$ )	[nm]	149/2.9
IP betas ( $\beta_{x/y}^*$ )	[mm]	8.2/0.1
Emittance ( $\gamma \epsilon_{x/y}$ )	[nm]	920/20
Energy spread ( $\Delta p/p$ )	[%]	0.3
Bunch Charge ( $Q$ )	[ $10^9$ ]	5.2
Bunch length ( $\sigma_z$ )	[ $\mu\text{m}$ ]	70
# Bunches / train		352
Chromaticity ( $\xi_y$ )		43000
$L_{\text{QD0-IP}}$	[m]	4.3

380 GeV

## Conversion

### Assumed values for hard photons generation

- $d = 1 \text{ mm}$  (dist. from laser to IP)
  - $\rho = \frac{d}{\gamma \sigma_y^*} = 1$
  - $k = 1$  (conversion efficiency)
  - max  $E_\gamma = 157 \text{ GeV}$  ( $x = 4.83$ )
  - $\lambda_e = 80\%$  (electron helicity)
  - $P_\gamma = -1$  (laser polarisation)

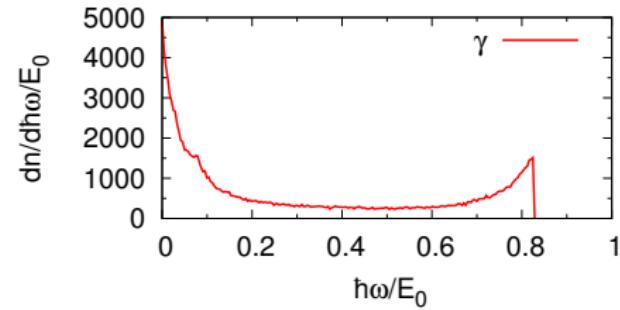


## e<sup>-</sup>-beam and $\gamma$ -beam parameters after conversion

Parameter	Unit	$e^-$	$\gamma$
IP beam size ( $\sigma_{x/y}^*$ )	[nm]	149/4.4	219/190
Energy spread ( $\Delta p/p$ )	[%]	65	96

380 GeV

*L*-Spectra

Luminosity	Unit	$e^- e^-$	$e^- \gamma$	$\gamma \gamma$
Total ( $\mathcal{L}$ )	$[10^{33} cm^{-2}s^{-1}]$	0.9	1.3	1.4
High ( $\mathcal{L}_{\text{high}}^{\dagger}$ )	$[10^{33} cm^{-2}s^{-1}]$	0.3	-	0.4

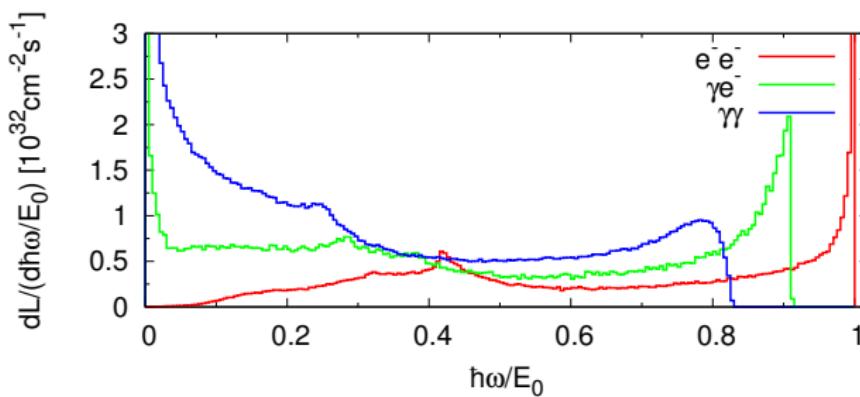


<sup>†</sup>above  $0.6 \cdot E_0$

380 GeV

## Incoherent Pairs

## Criteria for hitting the BeamCal:


- polar angle  $\theta \geq 10\text{mrad}$
  - transverse momentum  $p_T \geq 20\text{MeV}$

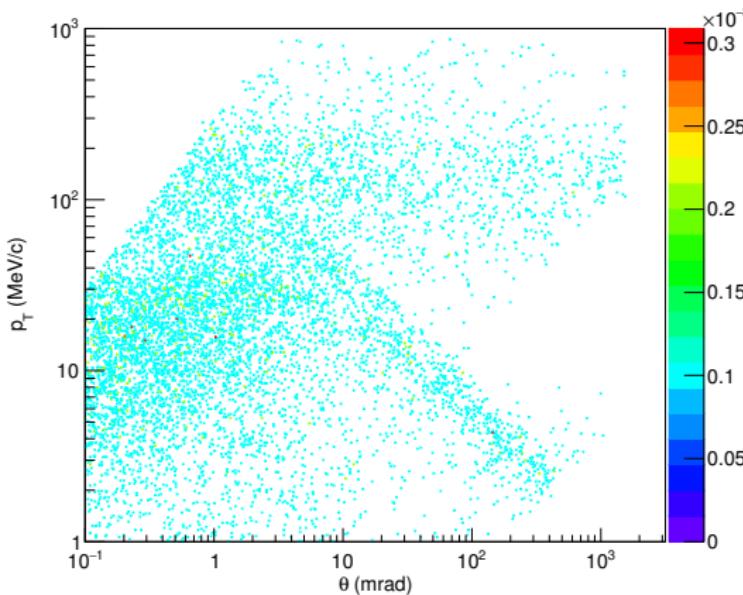

Pairs captured by detector  
18%  
Dissipated Power : 15 W

380 GeV

# Photons

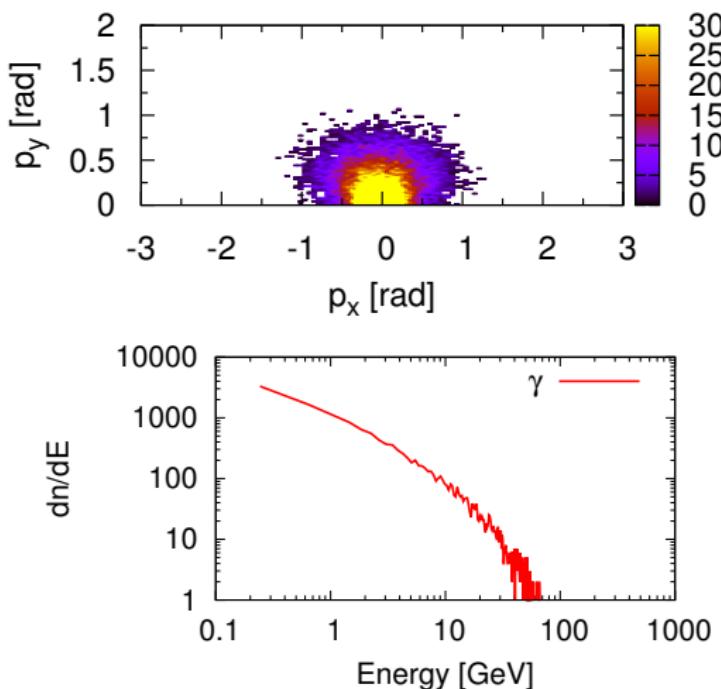

Photons captured by  
detector 70%  
Dissipated Power :  
**3.1 W**

# Hadrons

Number of Hadronic events<sup>†</sup> per bunch crossing:

Collision	Beam	Rate [x b.c.]	Beam	Rate [x b.c.]
$e^- e^-$	1	0.02	2	0.014
$e^- \gamma$	1	0.15	2	0.011
$\gamma e^-$	1	0.15	2	0.011
$\gamma\gamma$	1	0.48	2	0.47
Sum	1	0.8	2	0.71



---

<sup>†</sup>Tracking of hadronics events is pending


380 GeV

## Parameters Scan

Scan of  $k$ ,  $\rho$  and  $\sigma_x^*$

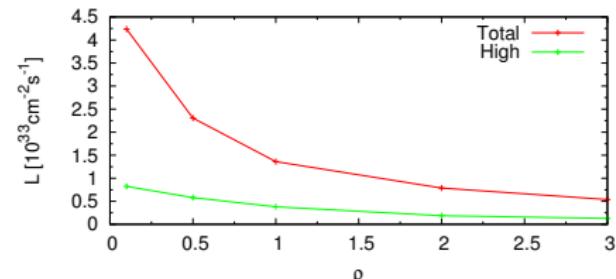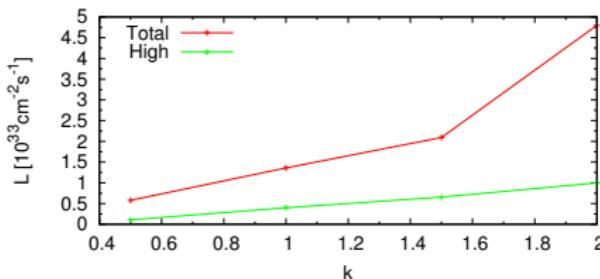

Further study of background level is required

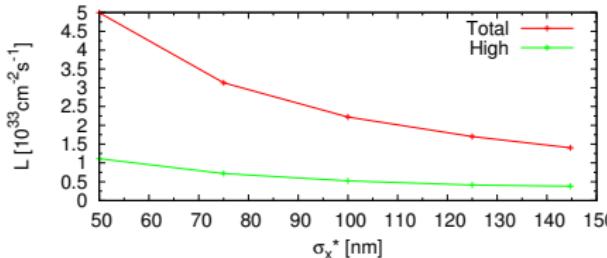

Reducing  $\sigma_x^*$  a factor 2 is possible  
Factor 4 is challenging

3 TeV


# CLIC FFS Parameters

Luminosity	Unit	3 TeV
Total ( $\mathcal{L}$ )	[ $10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ ]	5.9
High ( $\mathcal{L}_{\text{high}}$ )	[ $10^{34} \text{ cm}^{-2} \text{ s}^{-1}$ ]	2.0
IP beam size ( $\sigma_{x/y}^*$ )	[nm]	45/1.0
IP betas ( $\beta_{x/y}^*$ )	[mm]	10/0.07
Emittance ( $\gamma \epsilon_{x/y}$ )	[nm]	660/20
Energy spread ( $\Delta p/p$ )	[%]	0.3
Bunch Charge ( $Q$ )	[ $10^9$ ]	3.7
Bunch length ( $\sigma_z$ )	[ $\mu\text{m}$ ]	44
# Bunches / train		312
Chromaticity ( $\xi_y$ )		50000
$L_{\text{QD0-IP}}$	[m]	3.5

# Conversion

Assumed values for hard photons generation :

- $d = 1$  mm (dist. from laser to IP)
- $\rho = \frac{d}{\gamma\sigma_y^*} = 1$
- $k = 1$  (conversion efficiency)
- max  $E_\gamma = 1243$  GeV ( $x = 4.83$ )
- $\lambda_e = 80\%$  (electron helicity)
- $P_\gamma = -1$  (laser polarisation)

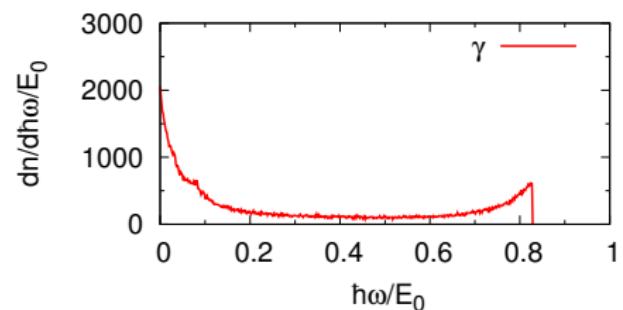


$e^-$ -beam and  $\gamma$ -beam parameters after conversion

Parameter	Unit	$e^-$	$\gamma$
IP beam size ( $\sigma_{x/y}^*$ )	[nm]	45/1.8	77/77
Energy spread ( $\Delta p/p$ )	[%]	65	96

3 TeV

 $\mathcal{L}$ -Spectra

Luminosity	Unit	$e^-e^-$	$e^-\gamma$	$\gamma\gamma$
Total ( $\mathcal{L}$ )	$[10^{34} \text{ cm}^{-2}\text{s}^{-1}]$	0.2	0.6	1.1
High ( $\mathcal{L}_{\text{high}}^\dagger$ )	$[10^{34} \text{ cm}^{-2}\text{s}^{-1}]$	0.09	-	0.8

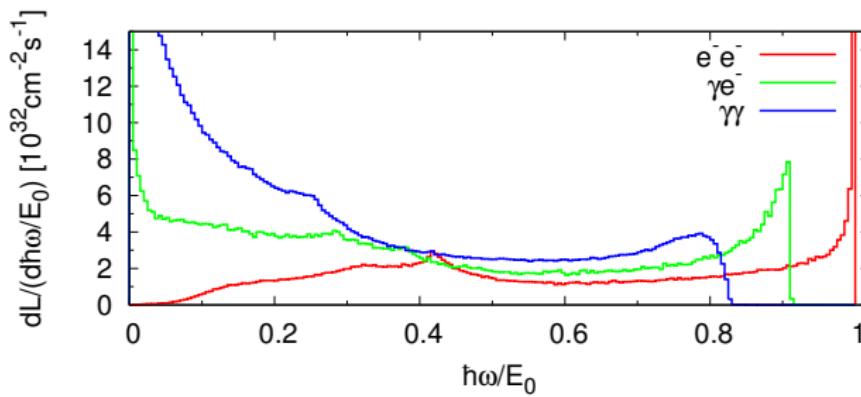


---



<sup>†</sup>above  $0.6 \cdot E_0$

3 TeV

# Spent $e^-$ beams

Criteria for hitting the BeamCal:

- polar angle  $\theta \geq 10 \text{ mrad}$
- transverse momentum  $p_T \geq 20 \text{ MeV}$

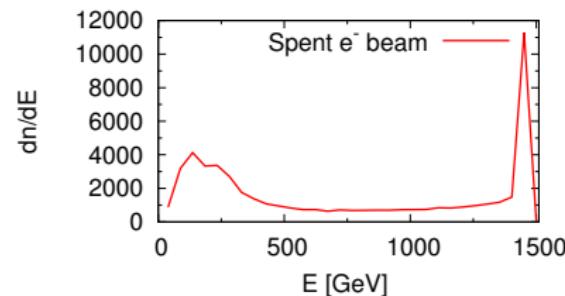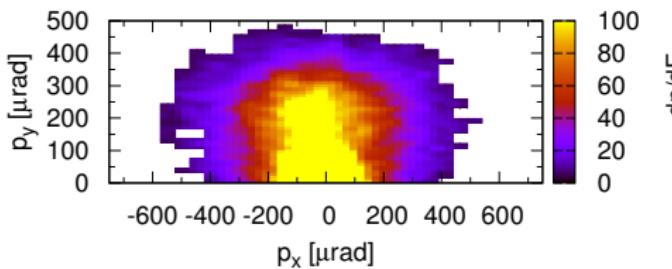


$e^-$  captured by detector 0%  
Dissipated Power : 0 W

3 TeV

## Incoherent Pairs

Criteria for hitting the BeamCal:

- polar angle  $\theta \geq 10 \text{ mrad}$
- transverse momentum  $p_T \geq 20 \text{ MeV}$

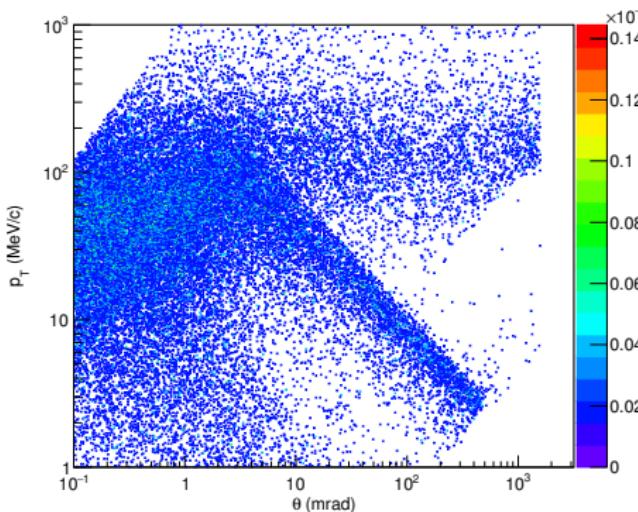



Pairs captured by detector  
26%  
Dissipated Power : **60 W**

Pairs created by scattered photons and laser are not simulated

# Coherent Pairs

Criteria for hitting the BeamCal:



- polar angle  $\theta \geq 10 \text{ mrad}$
- transverse momentum  $p_T \geq 20 \text{ MeV}$

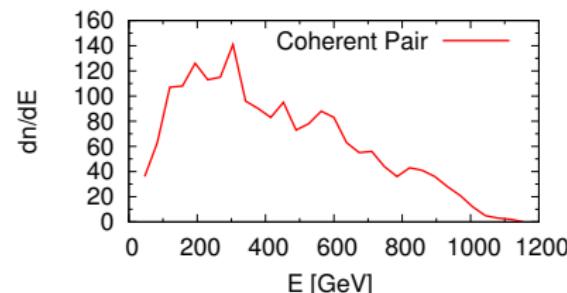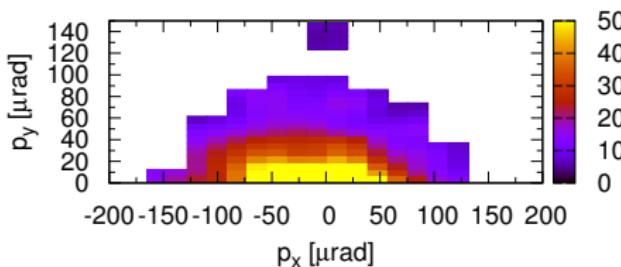

Pairs captured by detector 0%  
Dissipated Power : 0 W

3 TeV

# Photons

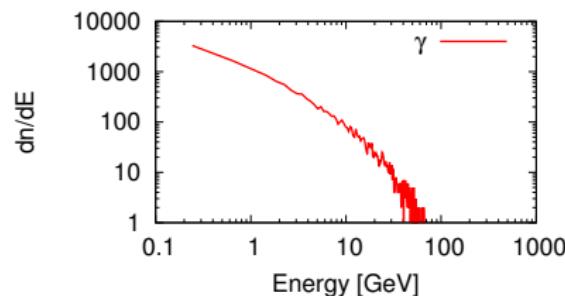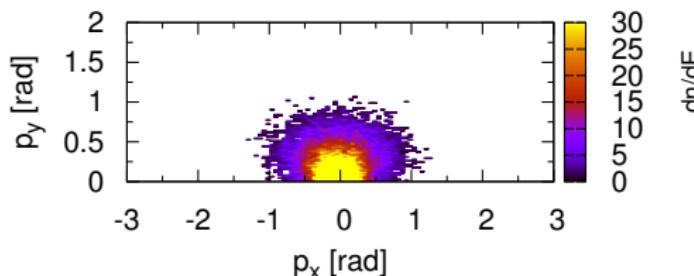

Photons intercepted by detector 87%  
Dissipated Power : 32 W

3 TeV

## Hadrons

Number of Hadronic events<sup>†</sup> per bunch crossing:

Collision	Beam	Rate [x b.c.]	Beam	Rate [x b.c.]
$e^- e^-$	1	0.02	2	0.014
$e^- \gamma$	1	0.12	2	0.010
$\gamma e^-$	1	0.12	2	0.010
$\gamma\gamma$	1	0.35	2	0.35
Sum	1	0.6	2	0.55




---

<sup>†</sup>Tracking of hadronics events is pending

3 TeV

# Parameters Scan

## Scan of $k$ , $\rho$ and $\sigma_x^*$

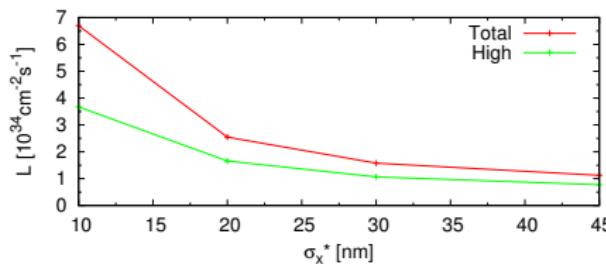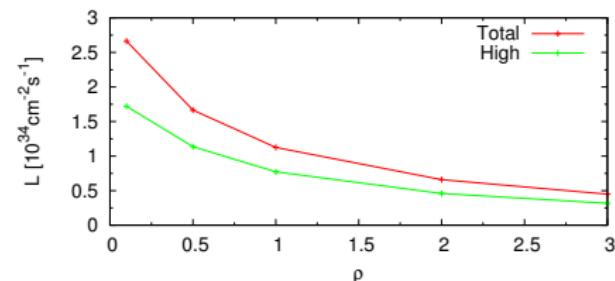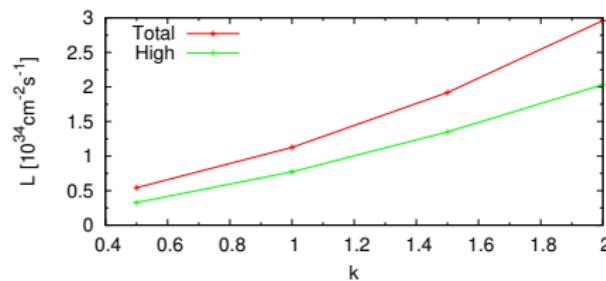

Reducing  $\sigma_x^*$  a factor 2 might be possible

# CONCLUSIONS

## Summary

Luminosity	Unit	380 GeV	Opt	3 TeV	Opt
Total ( $\mathcal{L}$ )	$[10^{34} \text{ cm}^{-2} \text{ s}^{-1}]$	0.14	0.3	1.1	2.5
High ( $\mathcal{L}_{\text{high}}$ )	$[10^{34} \text{ cm}^{-2} \text{ s}^{-1}]$	0.04	0.07	0.8	1.7

- Attractive luminosities for both 380 GeV and 3 TeV options with the current designs
- Further improvement can be achieved by optimizing  $\rho$ ,  $k$  and  $\sigma_x^*$  parameters
  - A detailed study would be necessary for the optimum cases
- When halving the value of  $\sigma_x^*$  (reasonable assumption) significant gain in  $\mathcal{L}$  and  $\mathcal{L}_{\text{high}}$ 
  - Understanding limitations of FFS on  $\sigma_x^*$  (common interest in the acc, community)

Laser compatible with the considered configurations?

# EXTRA SLIDES

## Laser Considerations

### e<sup>-</sup>-beam Parameters

- $E_0 = 380$  (3000) GeV
- $f_{\text{rep}} = 50$  Hz
- $n_b = 352$  (312)
- Bunch length = 70 (44)  $\mu m$

### Lasers concerns:

- pulse length
- non-linearity ( $\xi$ )
- wavelength

Parameter	Unit	380	3000
Wavelength x (pairs threshold)	$\mu m$	0.747	5.9
Photon Energy	eV	4.83	4.83
Power ( $n_\gamma = 10^{19}$ )	kW	1.66	0.21