




# Optimization of CEPC Vertex Detector


Hao Zeng, Joao Guimaraes Costa, Quan Ji, Jinyu Fu, Gang Li,  
Kewei Wu, Zhijun Liang, Mingyi Dong,  
April 26, 2021

# Vertex layout optimization


- vertex\_v1: realistic implementation of CDR vertex
  - Barrel: 3 double-layers
  - Endcap: 2 single disks
  - Only consider the barrel for MOST2 project
  - total average material budget is about 1.3% for vertex barrel, much more than CDR 0.9% ( $0.15\% \times 6$ )

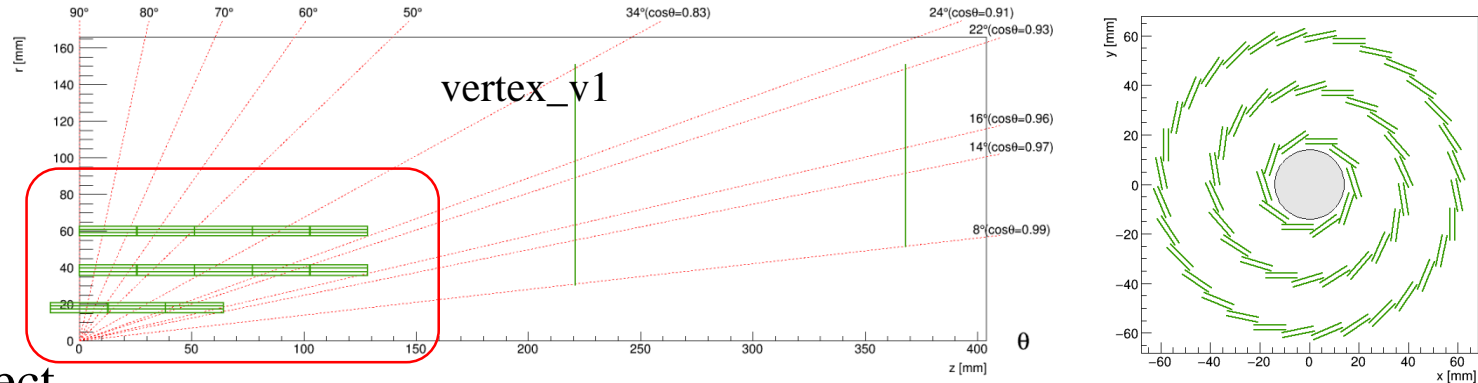

Transverse impact parameter error - const P across  $\cos\theta$

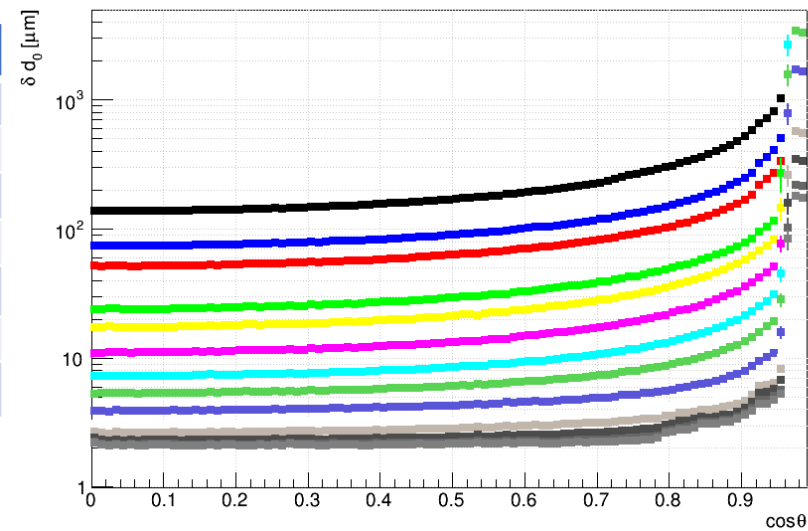








Radiation Length by Component

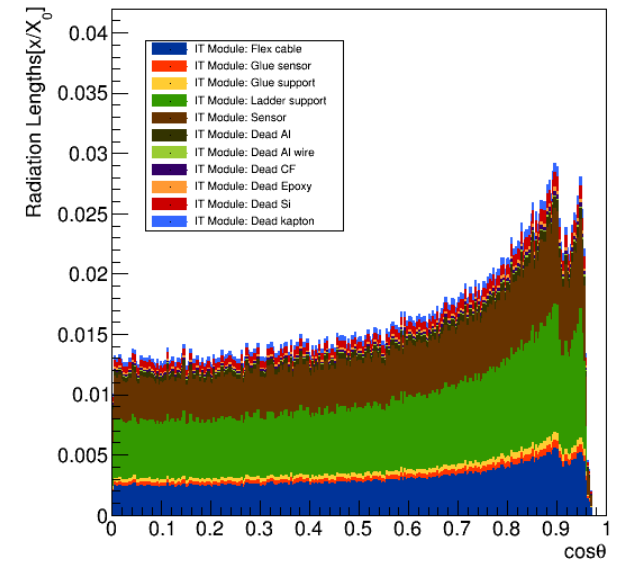

Barrel parameters

# Barrel optimization








- Changing the radius of vertex detector
  - the  $d_0$  resolution is no big difference for different detector size at very low momentum like 0.1GeV to 1GeV
  - while the  $d_0$  resolution is different at higher momentum like 1GeV to 100GeV.
    - bigger vertex detector has better resolution with momentum from 1GeV to 10GeV
    - smaller vertex detector has better resolution with momentum from 10GeV to 100GeV

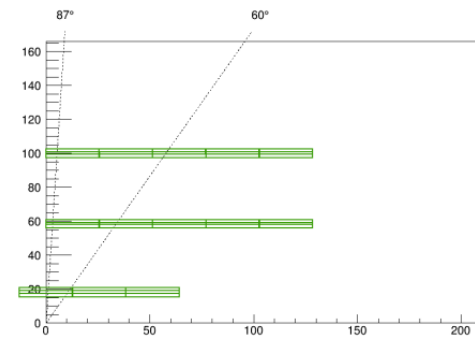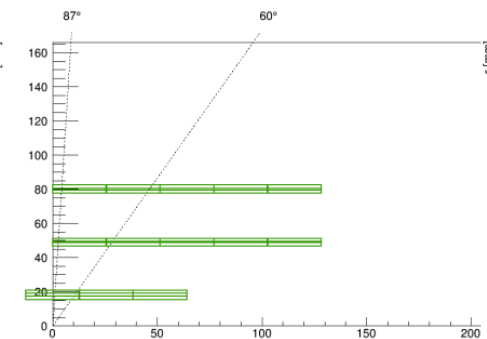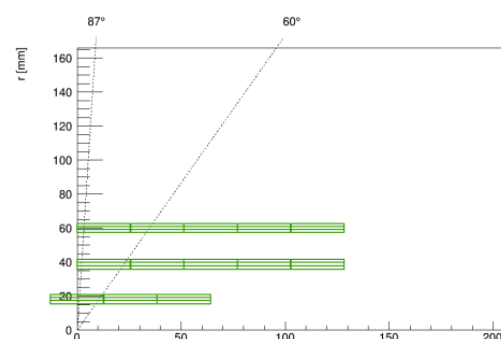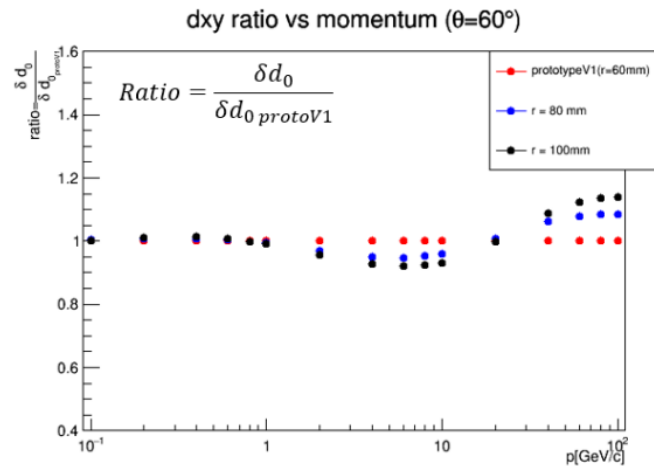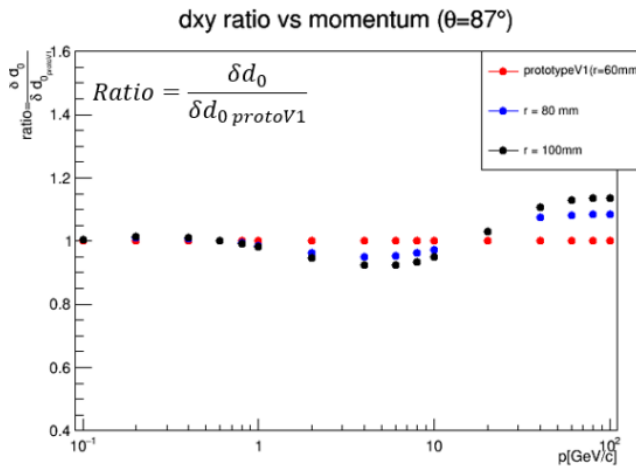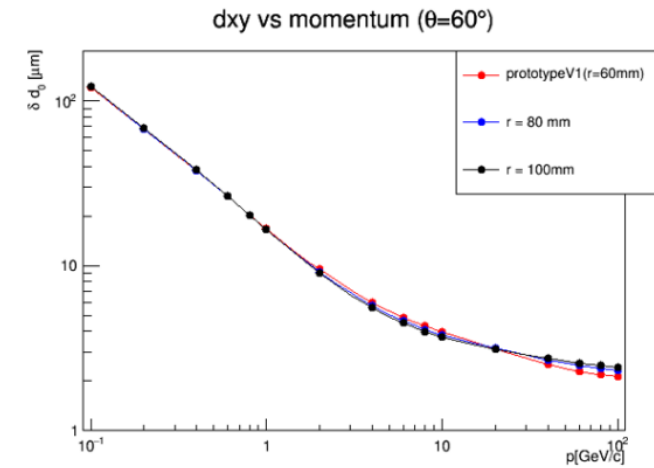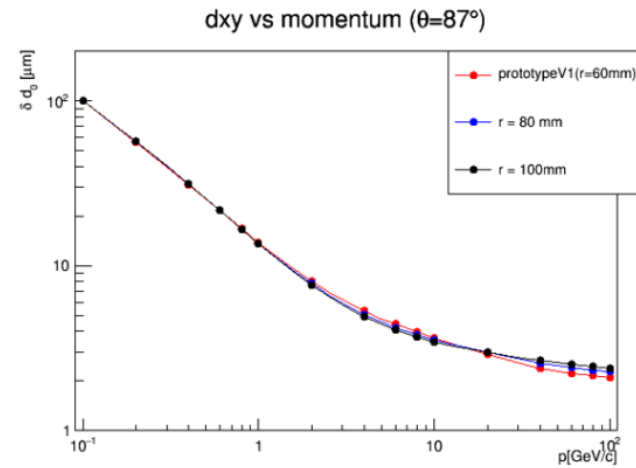

	prototype_v1	R=80mm	R=100mm
double-layer	R (mm)	R (mm)	R (mm)
Layer 1	18	18	18
Layer 2	38	49	59
Layer 3	60	80	100

# Barrel optimization

- Changing the number of layers
  - 0.1GeV-1GeV: The effect of number of layers on d0 resolution is very small.
  - 1GeV-10GeV: The vertex with less layers has better d0 resolution, which is probably because material effect dominate in this momentum range.
  - 20GeV-100GeV: The vertex with more layers has better d0 resolution, which is because vertex with more layers will have more measurement points for track reconstruction.

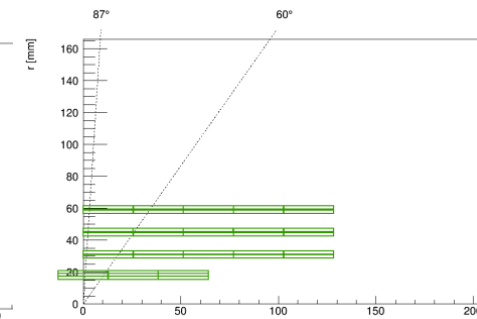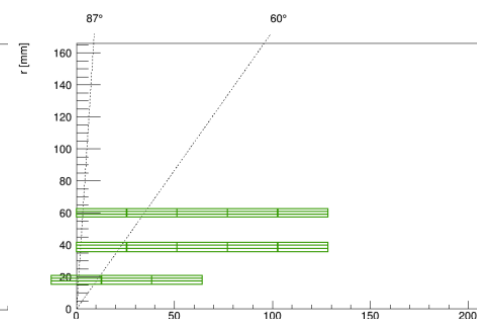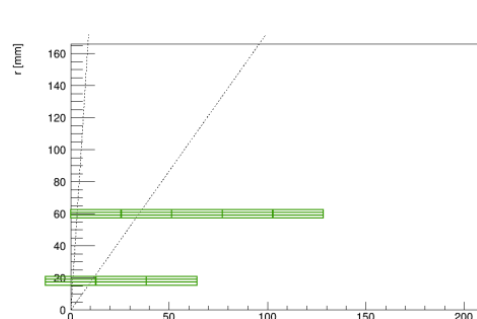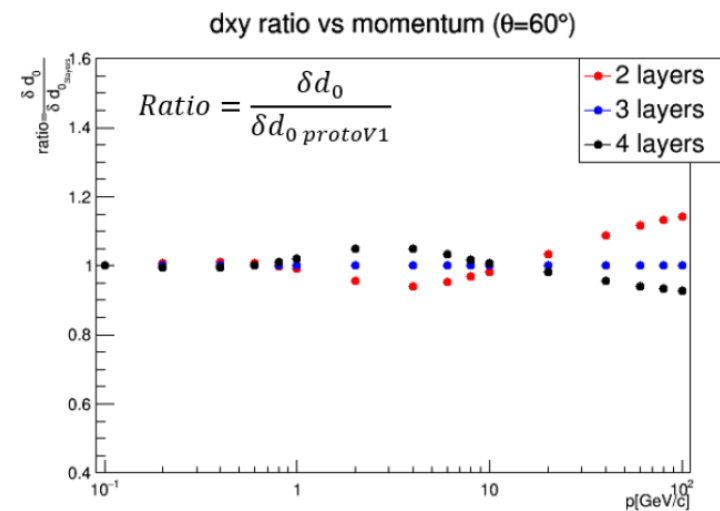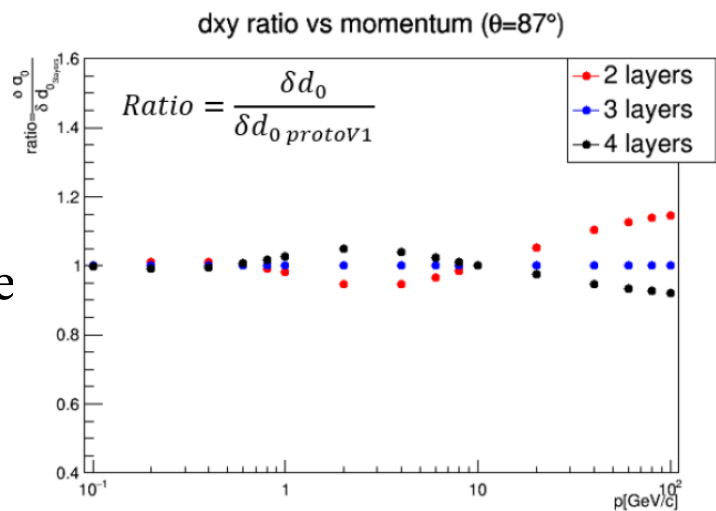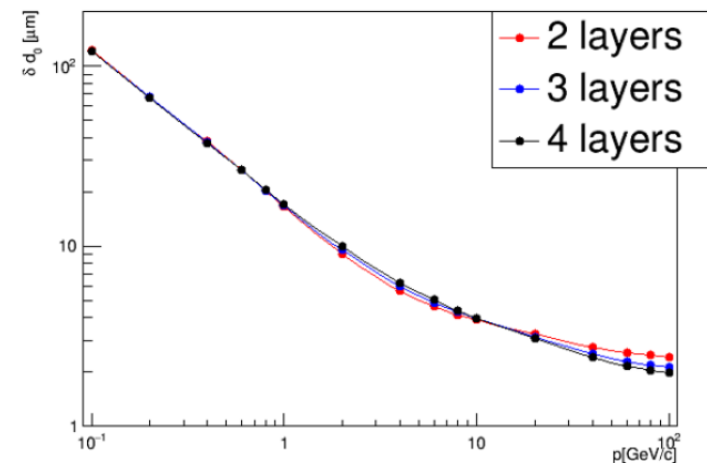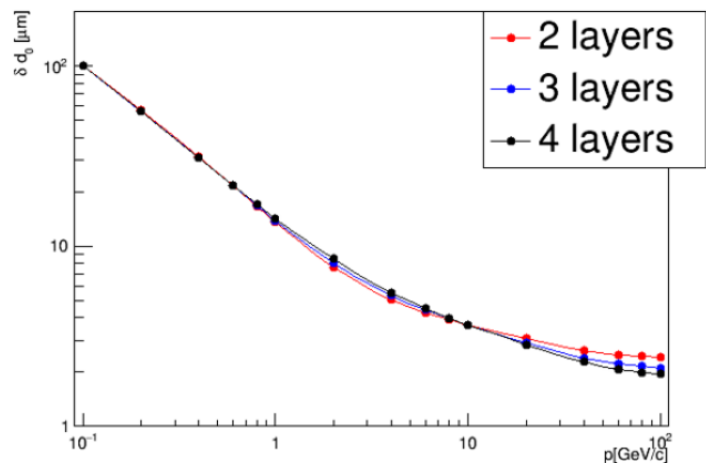


	2 layers	3 layers	4 layers
<b>double-layer</b>	R (mm)	R (mm)	R (mm)
Layer 1	18	18	18
Layer 2	60	38	31
Layer 3		60	45
Layer 4			60







# Barrel optimization

- Changing the radius of second layer
  - second layer radius has very small effect on d0 resolution.
  - In addition, second layer closer to first layer has better resolution for 10GeV and 100GeV tracks
  - second layer closer to first layer will get worse resolution for 1GeV tracks.
  - However, second layer in middle is a better choice for mechanics design.

dxy vs radius of second layer ( $\theta=87^\circ$ )

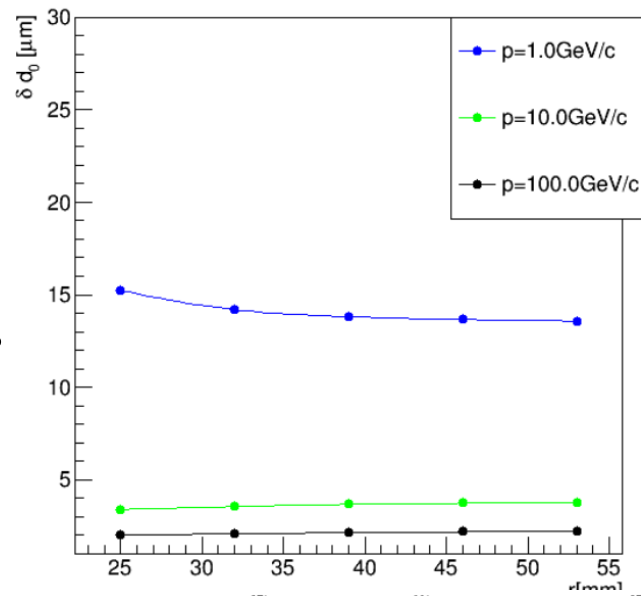


dxy vs radius of second layer ( $\theta=60^\circ$ )

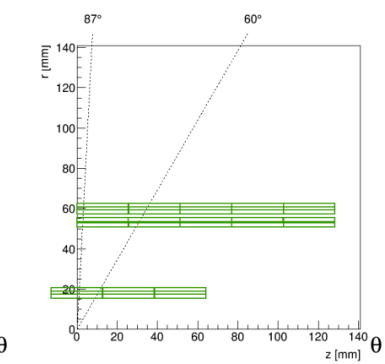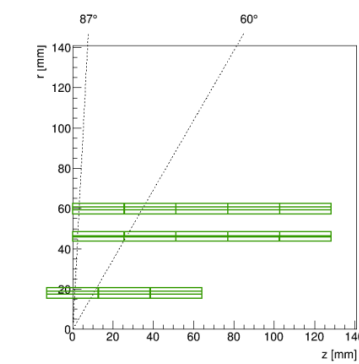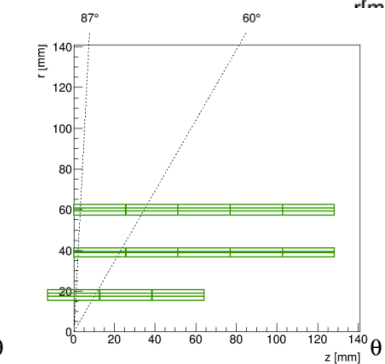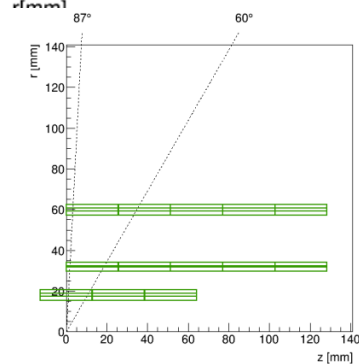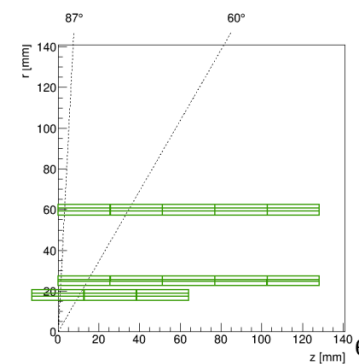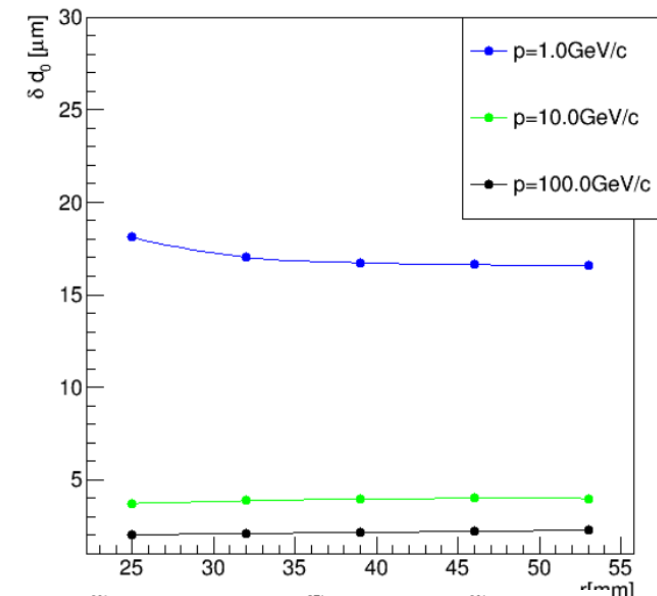


	$r_2=25\text{mm}$	$r_2=32\text{mm}$	$r_2=39\text{mm}$	$r_2=46\text{mm}$	$r_2=53\text{mm}$
<b>double-layer</b>	R (mm)	R (mm)	R (mm)	R (mm)	R (mm)
Layer 1	18	18	18	18	18
Layer 2	25	32	39	46	53
Layer 3	60	60	60	60	60

Finally, we choose the barrel with a radius of **60mm** and **3 equispaced** double-layers considering the **mechanics** and **material**, which is the CDR layout.

# Long barrel vertex

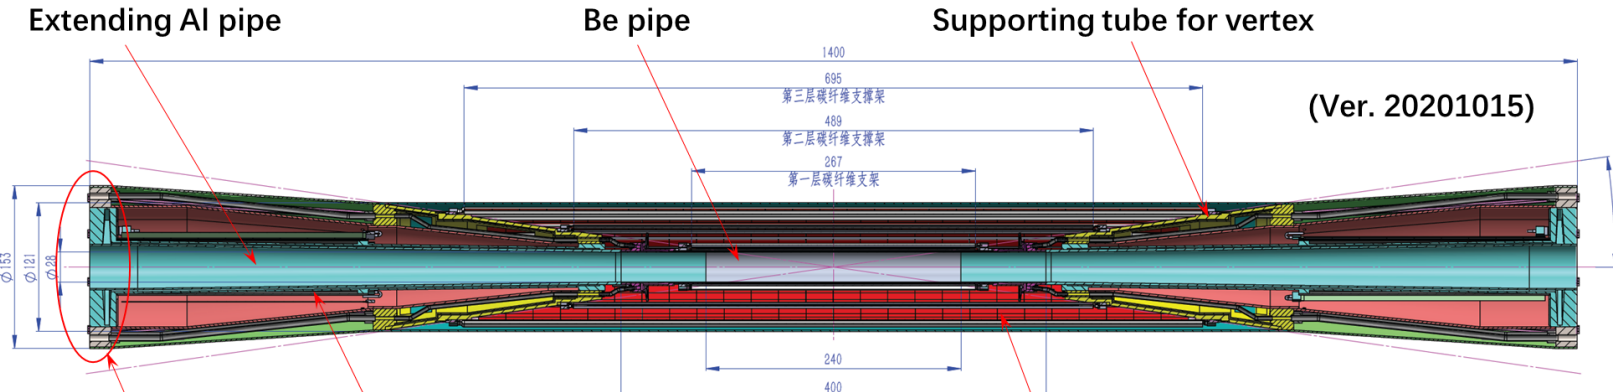

- Feasible solution for air cooling
- Simple structure
- Realistic long barrel vertex:
  - stiffer carbon fiber ladder support
  - more cable for read-out
  - vibration of long ladder

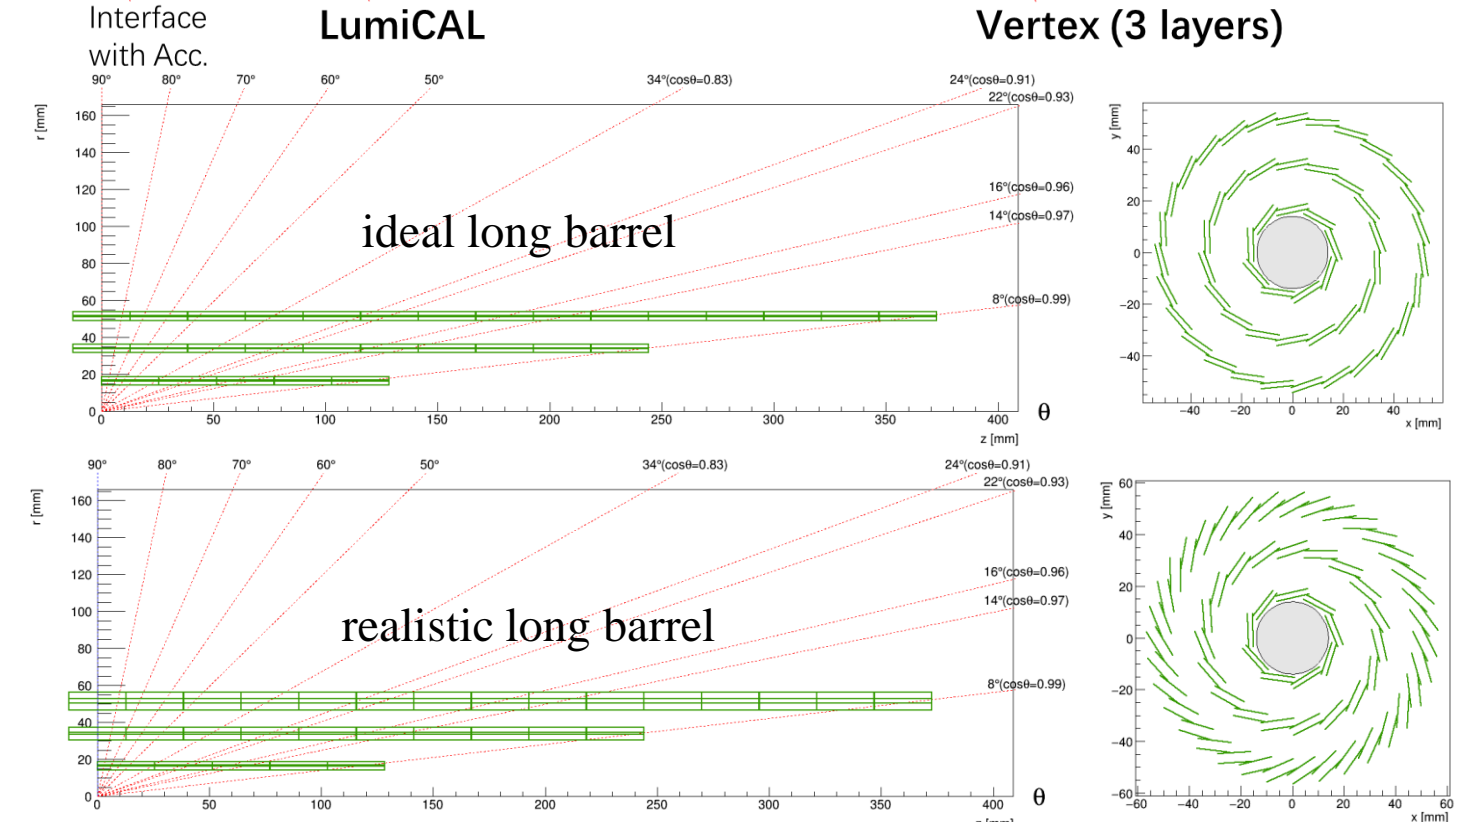


Long barrel design	Length of ladder	Chips / ladder	Readout mode	No. of flex Layers
layer1	250	10	Single end	2
layer2	500	20	double ends	2
layer3	750	30	double ends	4

			Optimization	
			Thickness	goal
2 flex layers	Polyimide	25um	12	
	Adhesive	28um	15	
	Plating Al	17.8um	?	
	kapton	50um	50	
	Plating Al	17.8um	?	
	Adhesive	28um	15	
4 flex layers	Polyimide	25um	12	
	Adhesive	28um	15	
	Plating Al	17.8um	?	
	kapton	50um	50	
	Plating Al	17.8um	?	
	kapton+adhesive	50um	50	
	Plating Al	17.8um	?	
	kapton	50um	50	
	Plating Al	17.8um	?	
	Adhesive	28um	15	
Polyimide	25um	12		


# Long barrel vertex

Radiation Length by Component

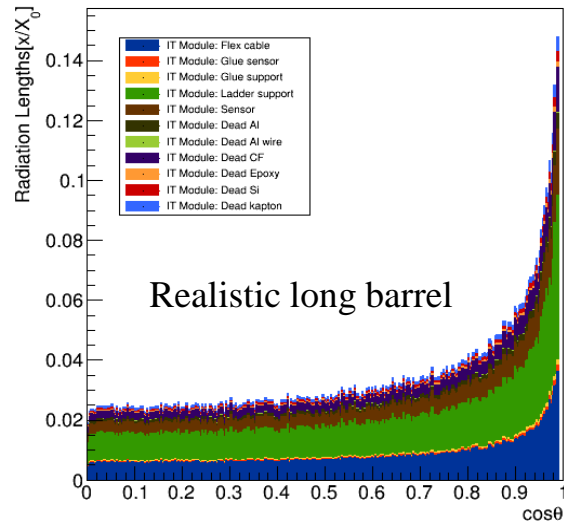


Realistic long barrel

Radiation Length by Component

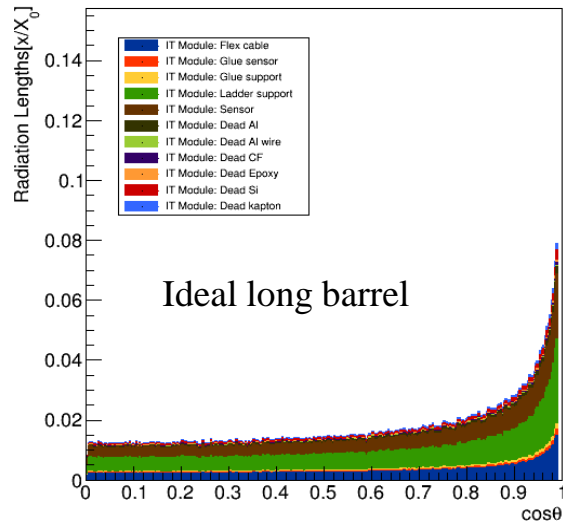


Ideal long barrel

Radiation Length by Component

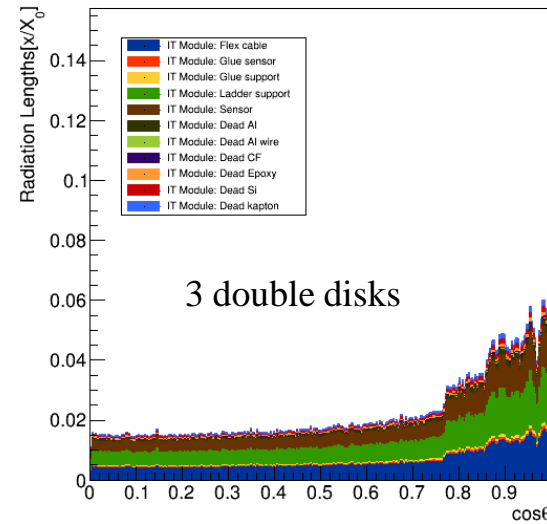

3 double disks


dx vs cosθ (p=20GeV)

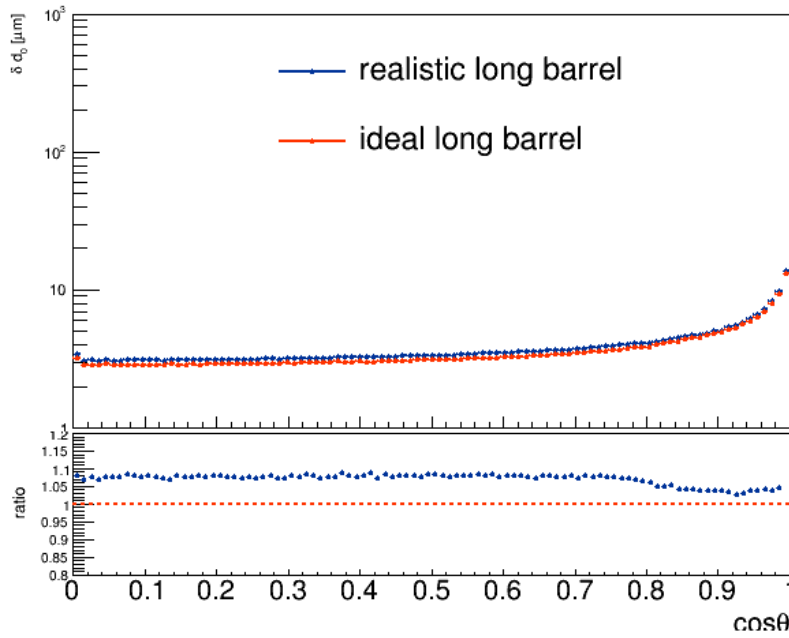





➤ The  $d_0$  resolution of realistic long barrel vertex is worse about 7% than ideal long barrel vertex.

- The material budget of realistic long barrel vertex is about twice as much as the ideal long barrel vertex.
- Much more material in the front region than disk version layout.

# Long barrel vertex performance

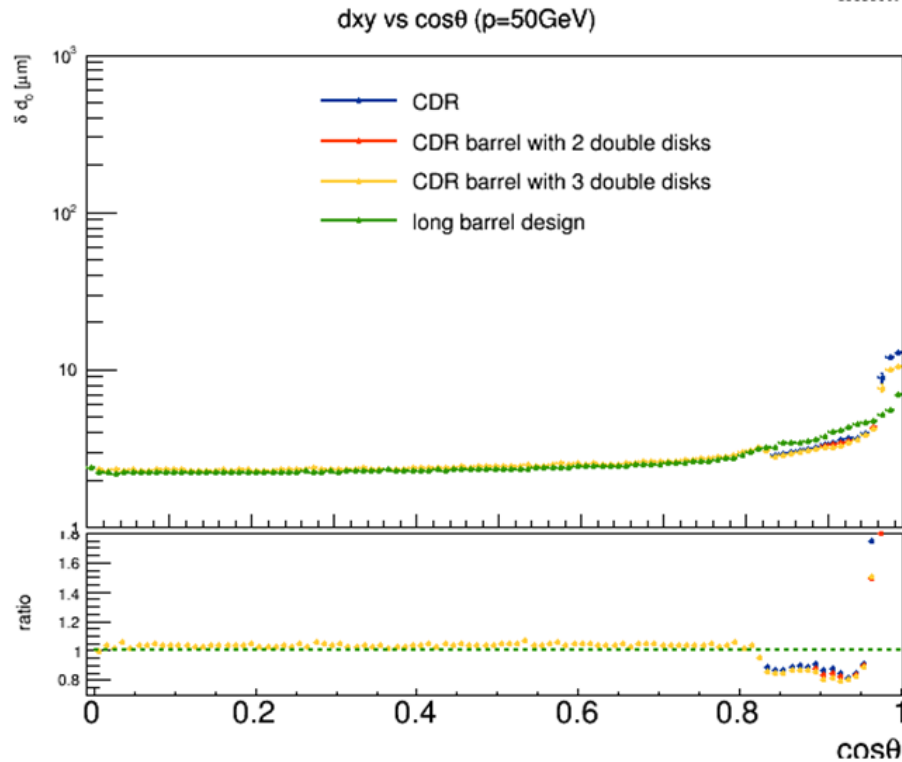



- $\cos\theta$ : 0.82-0.96, disk version better than long barrel design
- $\cos\theta > 0.96$ : long barrel design better CDR barrel with disk version, because innermost layer of long barrel provides closer first hit to IP

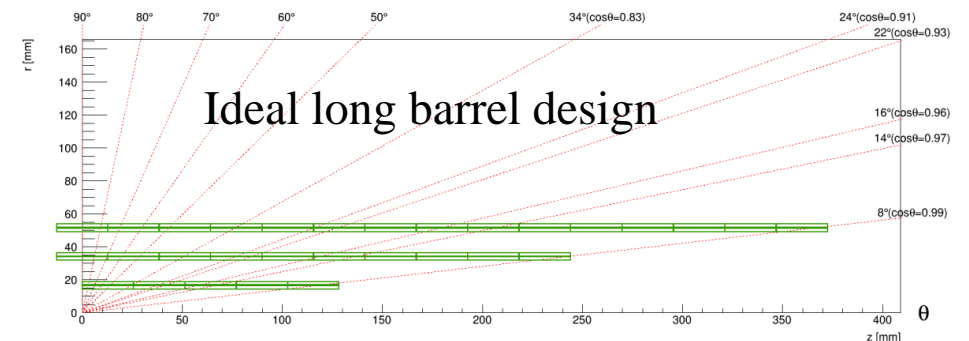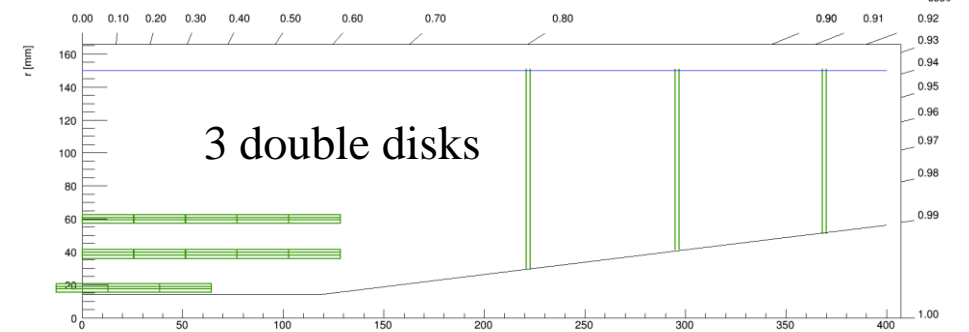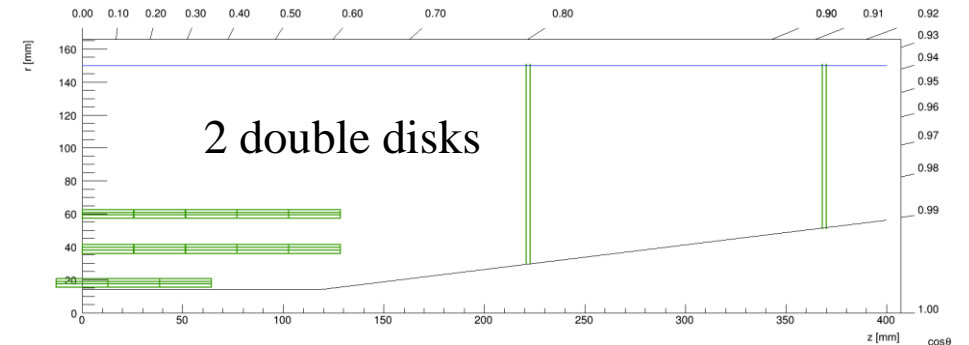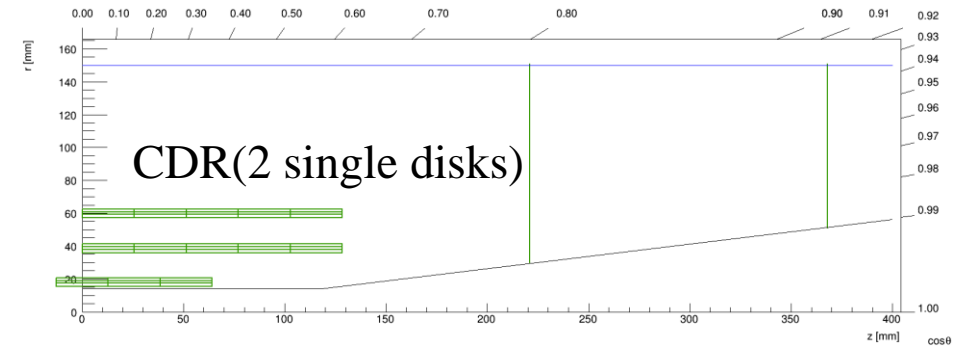





# Barrel optimization

- Lengthen the innermost layer
  - longer first layer design has the advantages of long barrel design and disk design
  - $\cos\theta$ : 0.82-0.96, same as CDR
  - $\cos\theta > 0.96$ : similar to long barrel design (even a little better), better than CDR

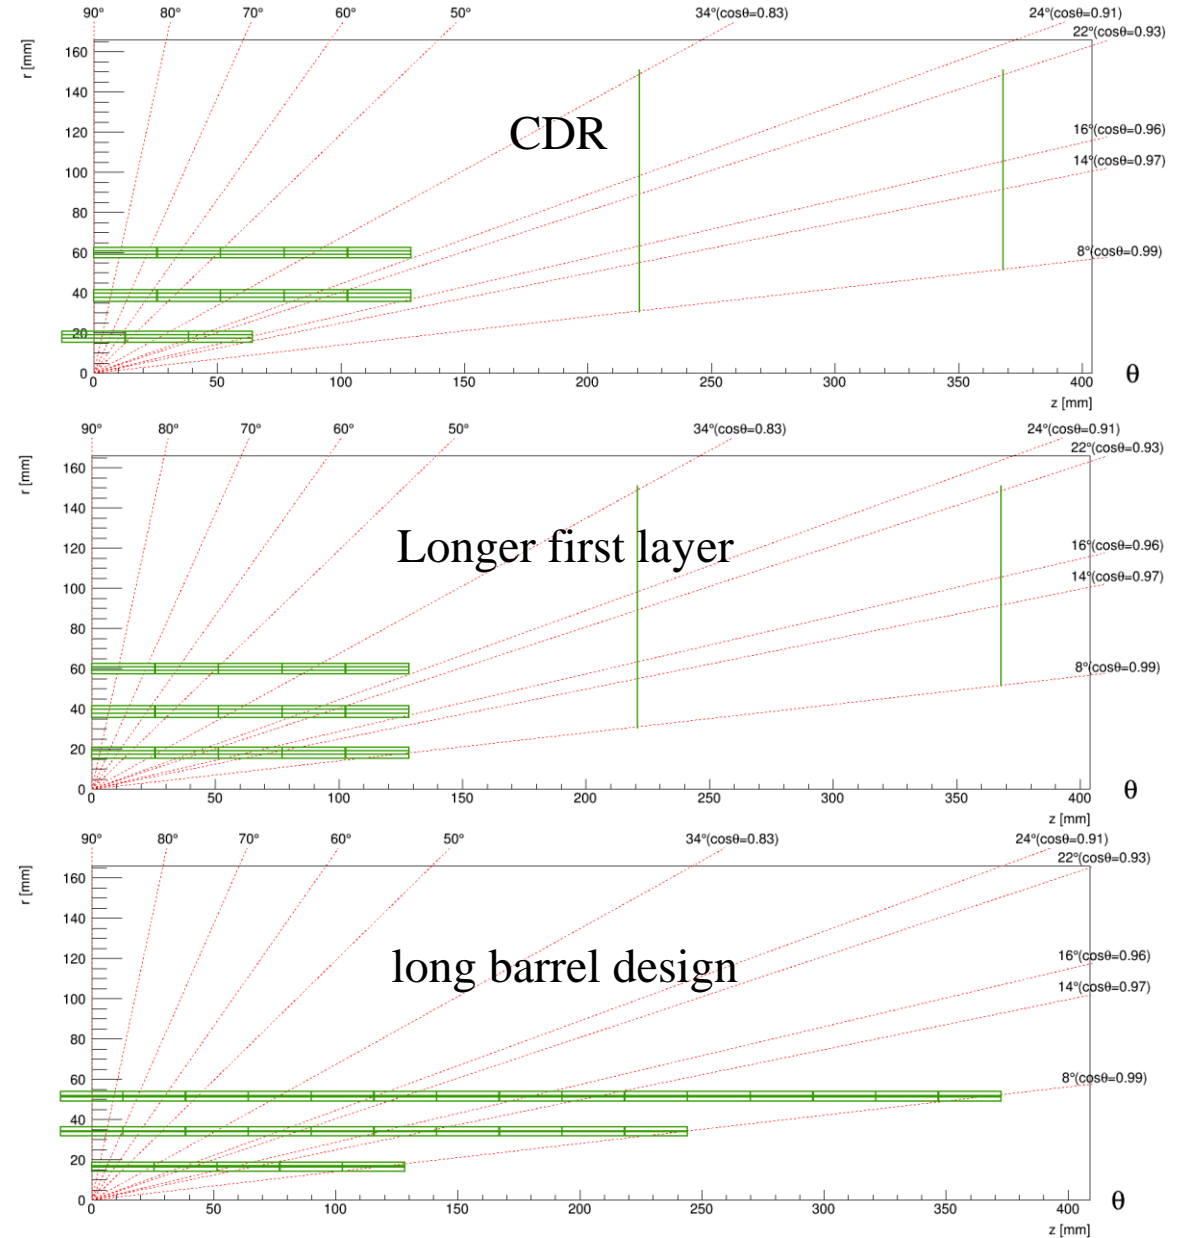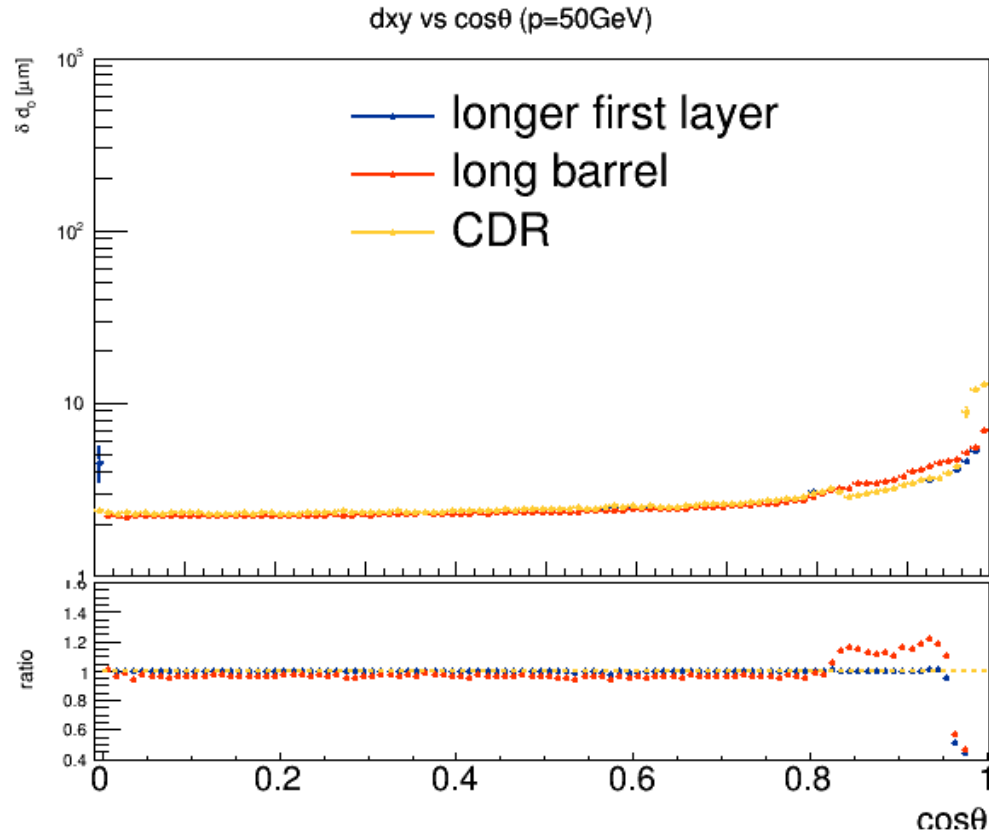

# Disk optimization

- Different position of 2 single-layer disks
  - not always improve resolution, some points better, some worse
  - moving disk closer to barrel can improve resolution at  $\cos\theta \approx 0.8$  (more hits)

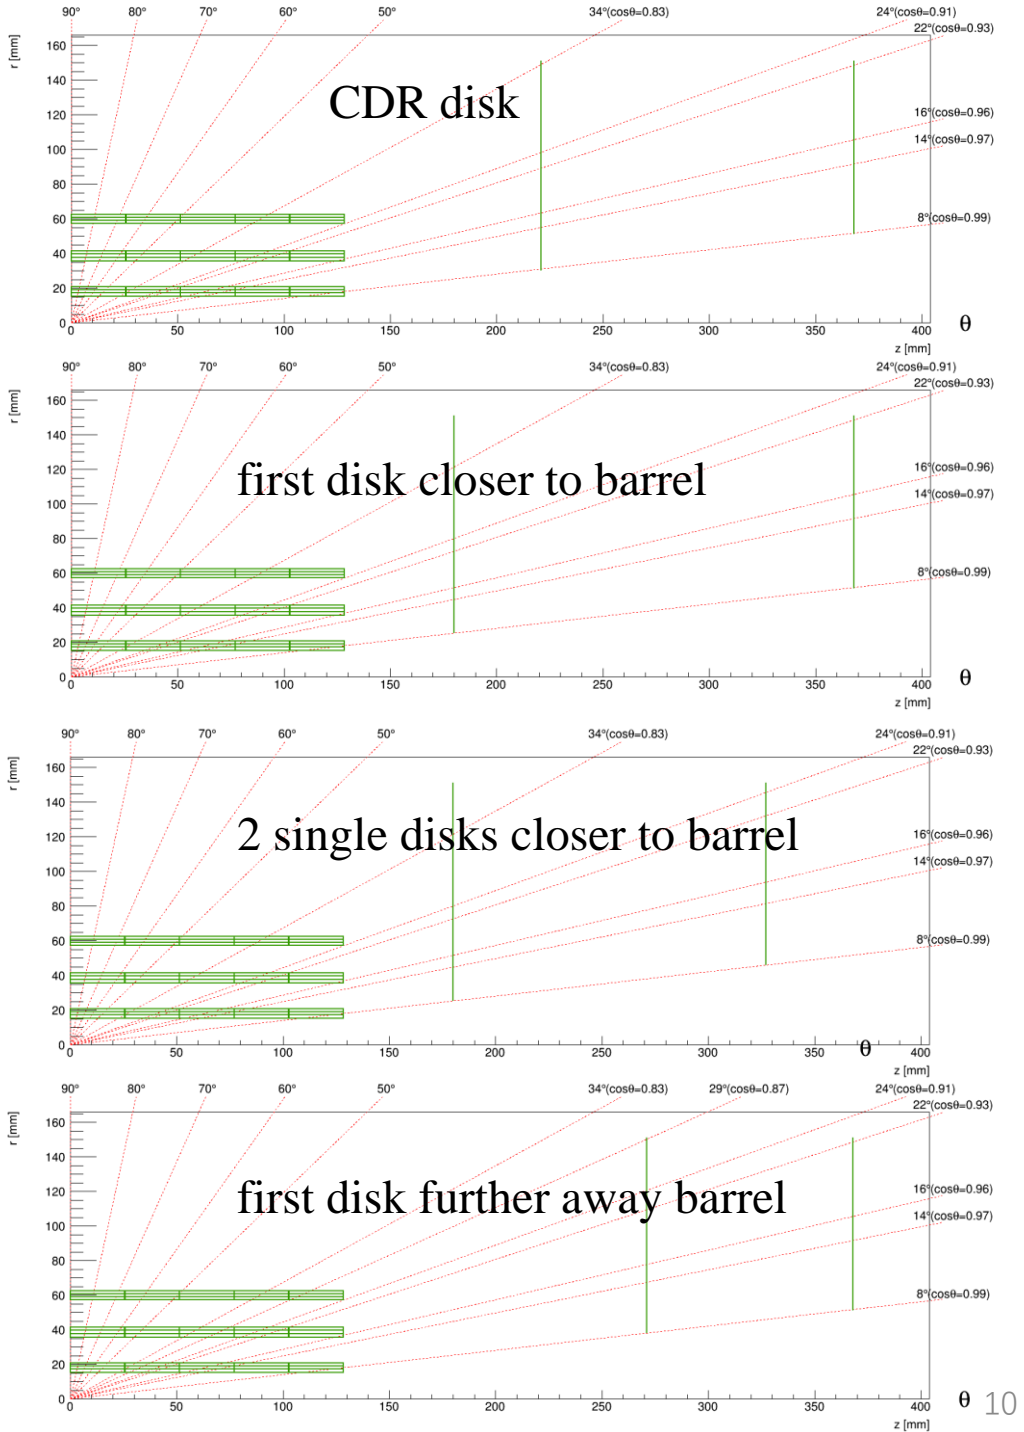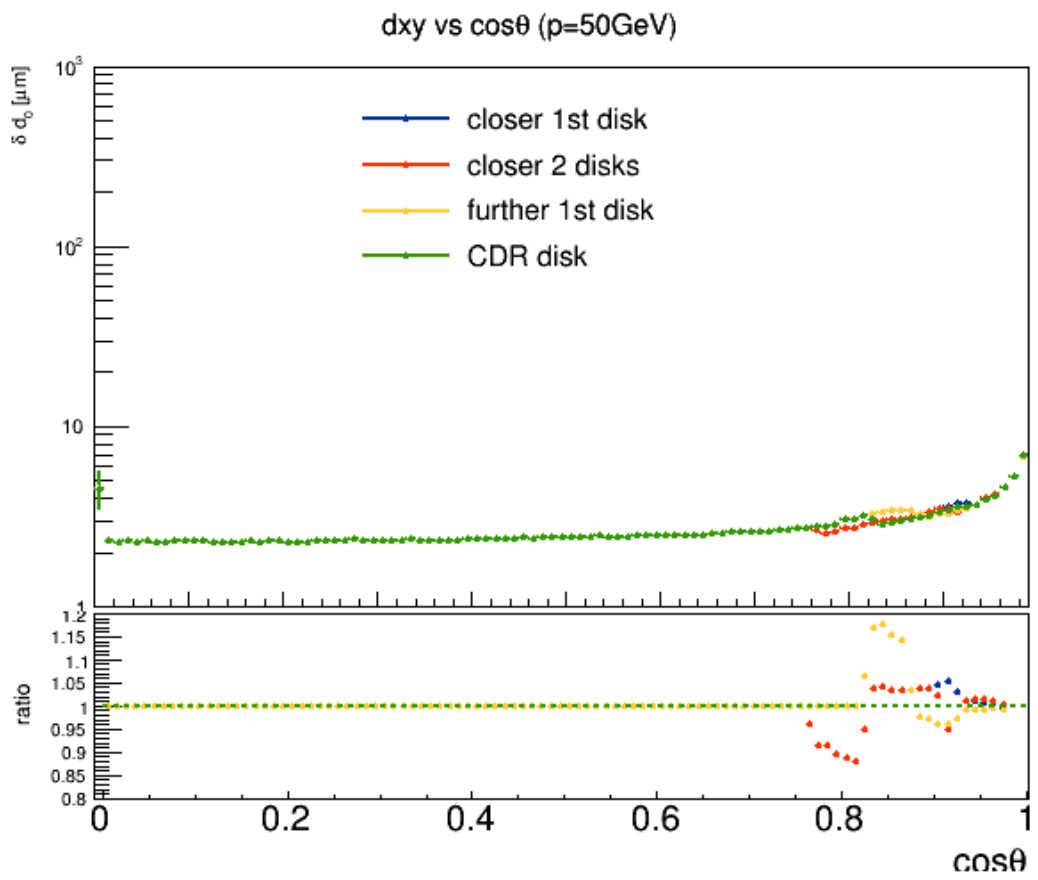



# Disk optimization

Longer first layer with different number of disk:

2 ways to improve resolution:

- increase the number of disk
- replace single disk with double disk


no worse resolution points

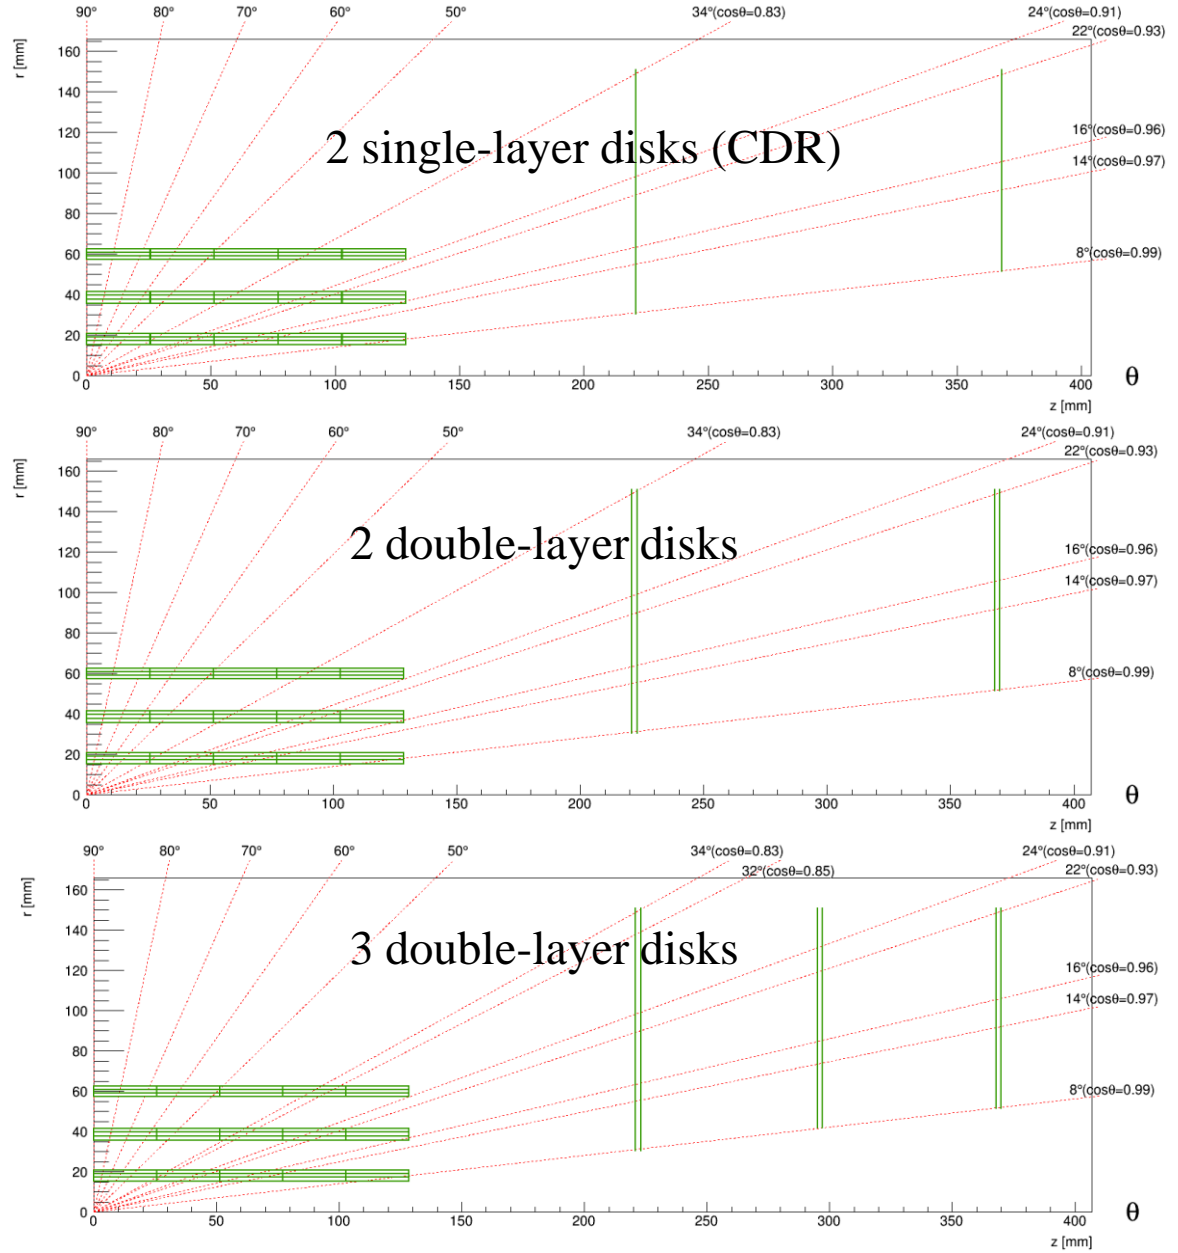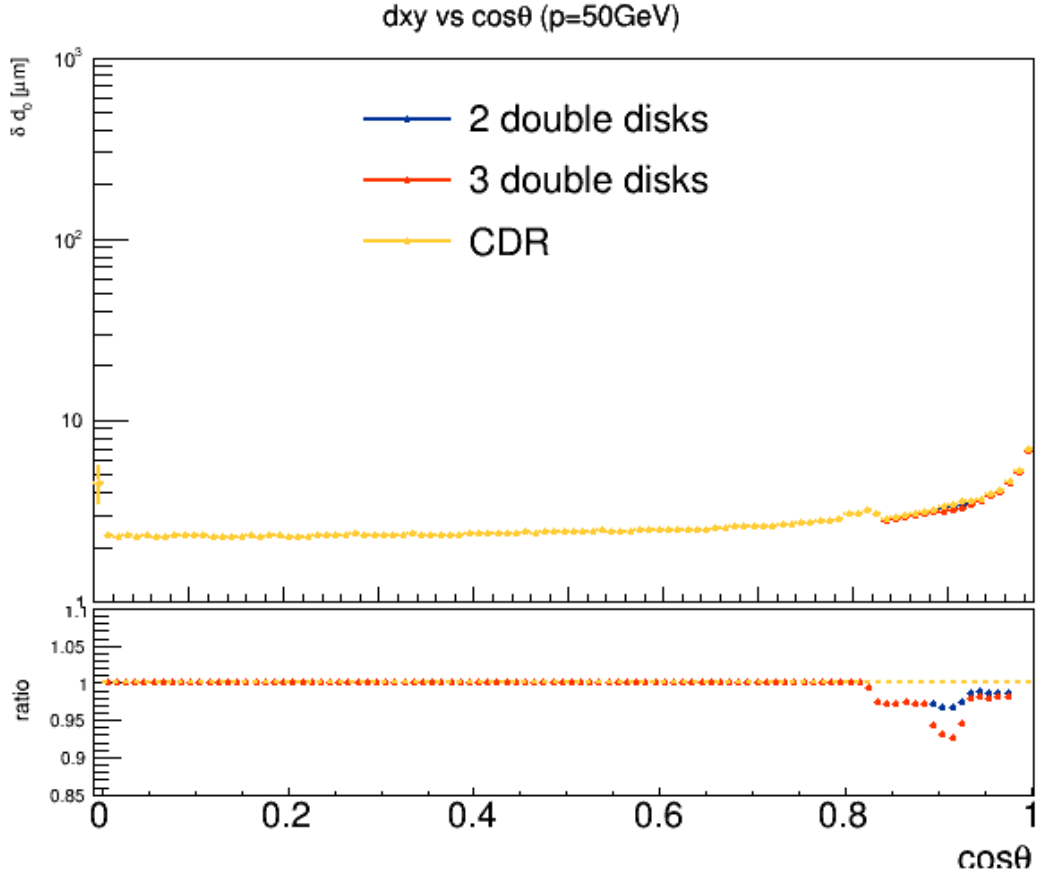




# Disk optimization

## 3 double-layer disks closer to barrel

- longer innermost layer with disk has better resolution than full barrel design in front region
- moving disk closer to barrel will enlarge the improved region
- considering the mechanics, putting 3 double disk at CDR disk position is a better design.

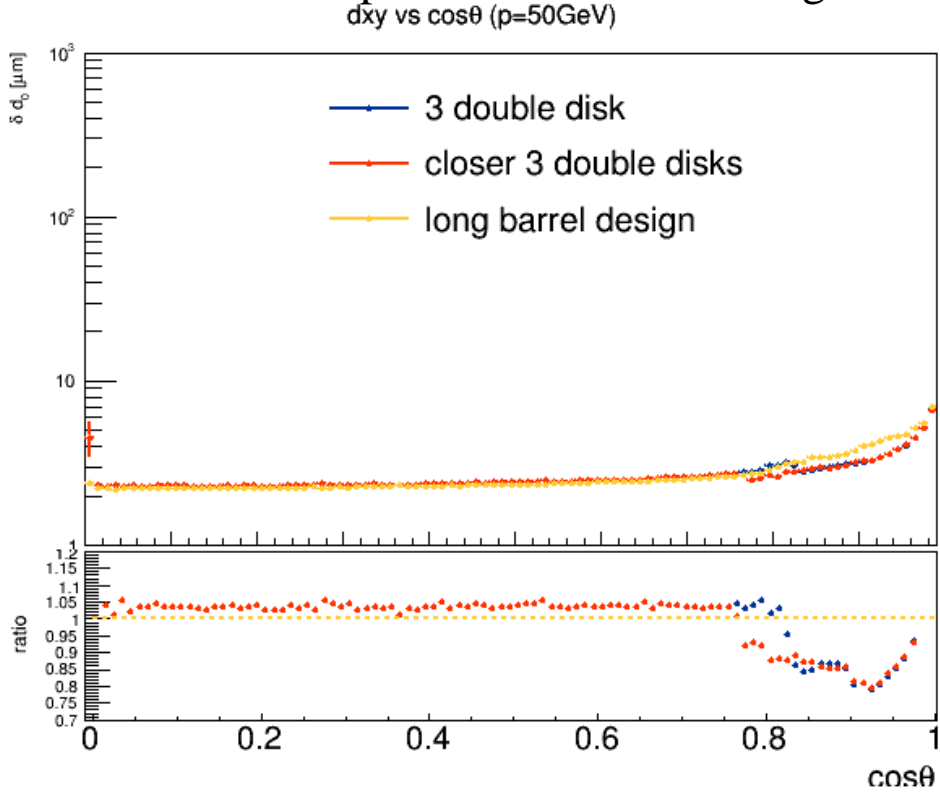


## Better layout after barrel optimization and disk optimization

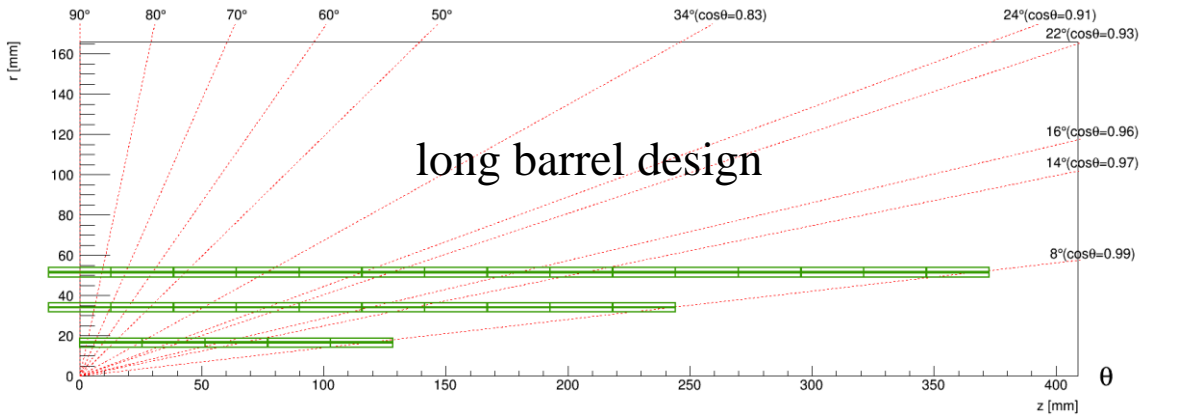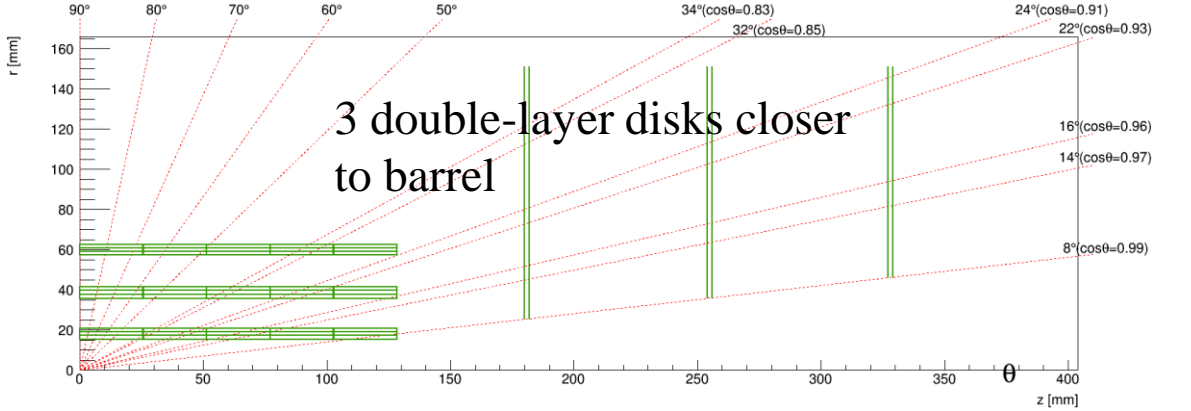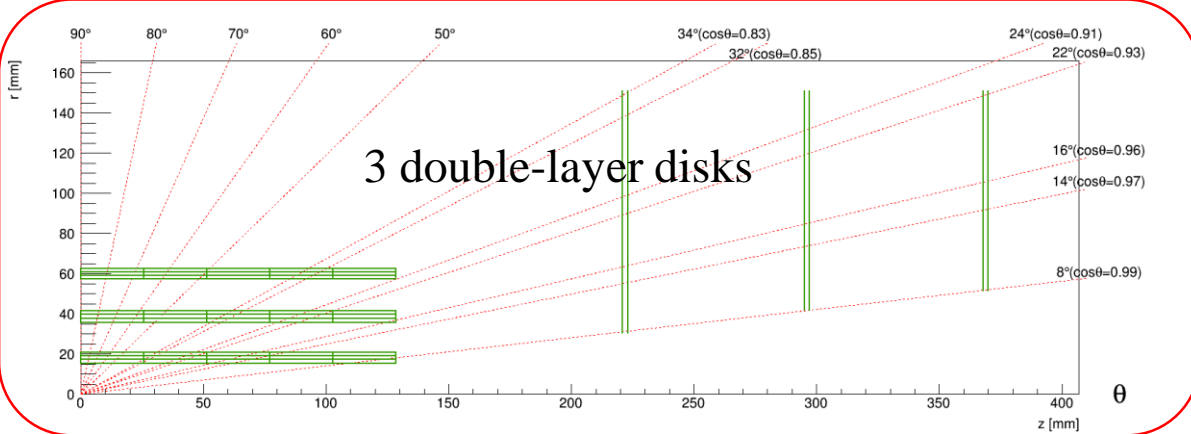


# Beam pipe study overview

- Beam pipe radius
  - Big effect on low momentum track
  - Beam pipe radius is smaller, resolution is better
  - Improve d0 resolution 21% if reduce beam pipe radius to 10 mm
- Beam pipe material
  - Beam pipe structure:
    - innermost Au: T=5 um
    - inner Beryllium layer: T= 0.5 mm
    - gap: T=0.5 mm (coolant)
    - outer Beryllium layer: T= 0.35 mm
  - 24% worse if use paraffin coolant +Au
  - might cancel the material effect if reduce beam pipe radius to 10mm

4 layers

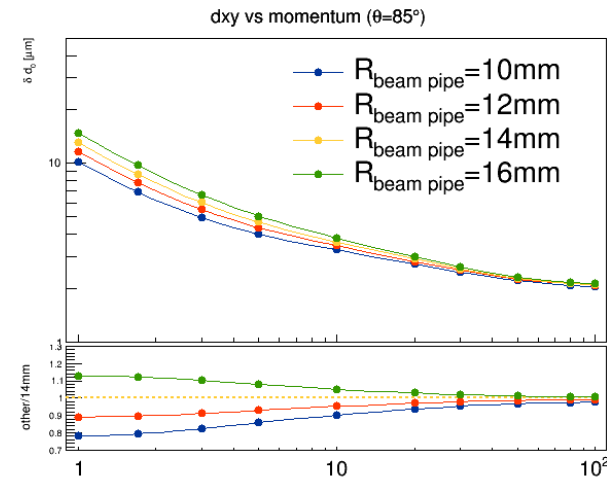

Reduce the beam pipe radius!!!


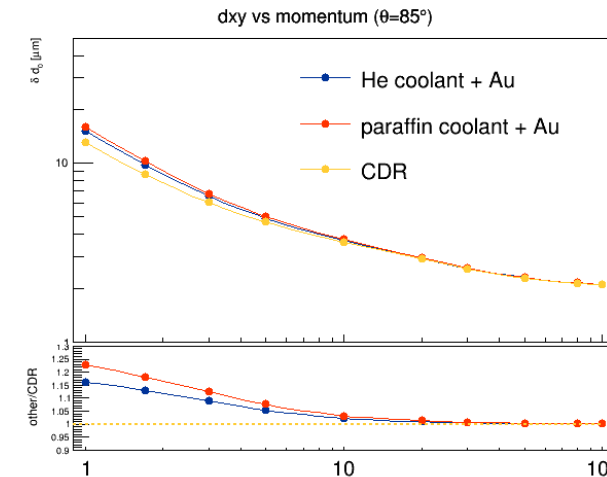


Reduce the beam pipe material!!!  
Make the beam pipe thinner!!!

	CDR	Helium gas coolant	Paraffin coolant
Au	0	0.001495	0.001495
Beryllium	0.001417	0.002409	0.002409
coolant	0	≈0	0.001037
total	0.001417	0.003905	0.004941

Radiation length of beampipe

# New beam pipe with diameter of 20 mm

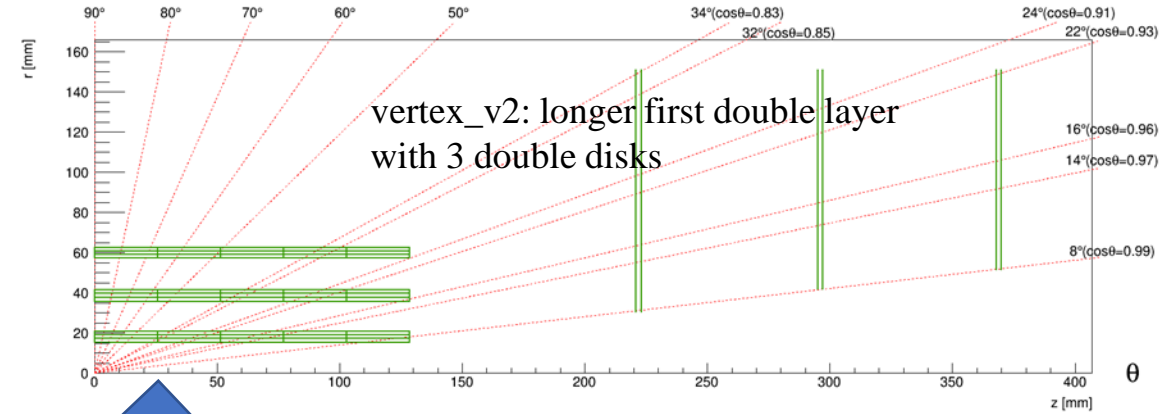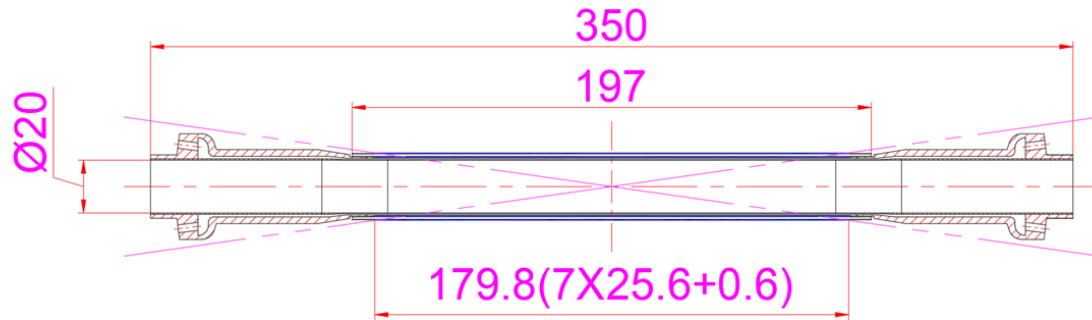

Q. Ji


According to processing capacity:  
 Inner Be pipe: 0.20mm thick, 210(25+160+25)mm long  
 Outer Be pipe: 0.15mm thick, 165mm long

↑ thinner

inner Beryllium layer: T= 0.5 mm  
 outer Beryllium layer: T= 0.35 mm

Innermost layer will be inside the border line, which defines the vertex detector coverage.


Shorter innermost layer is required

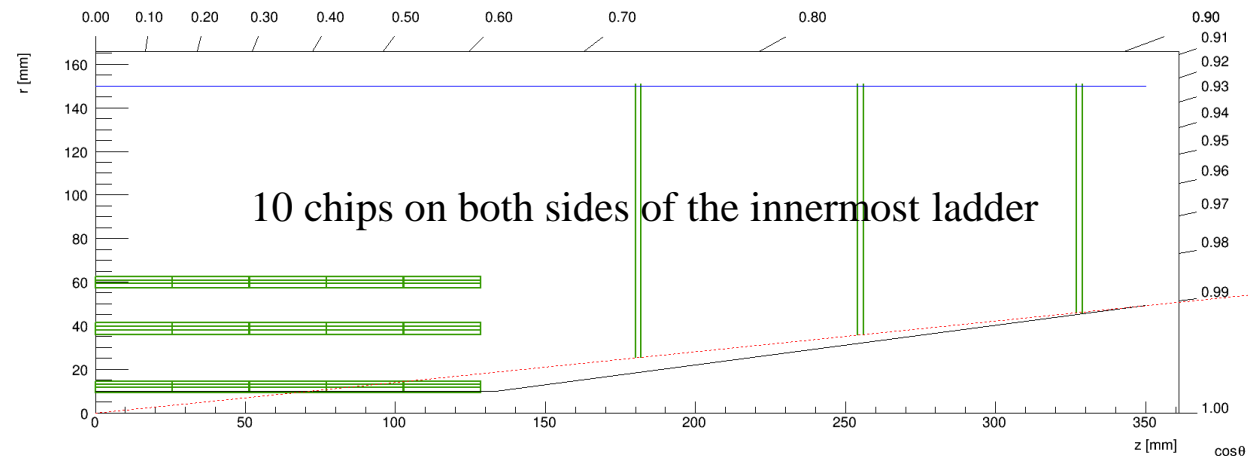





April 26, 2021

# Different ladder arrangements and chips for innermost layer

Comparison of different ladder arrangements for innermost layer:

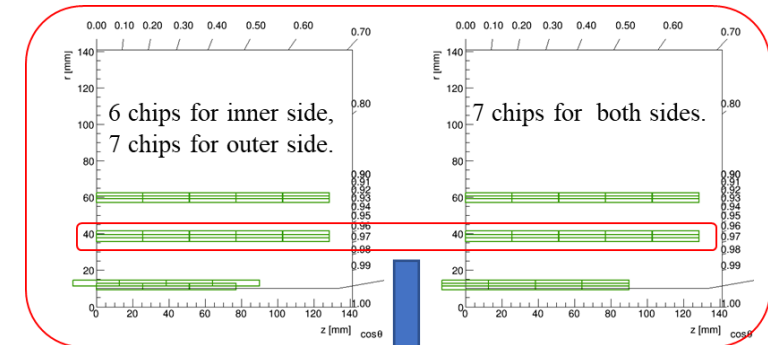


Move to the middle

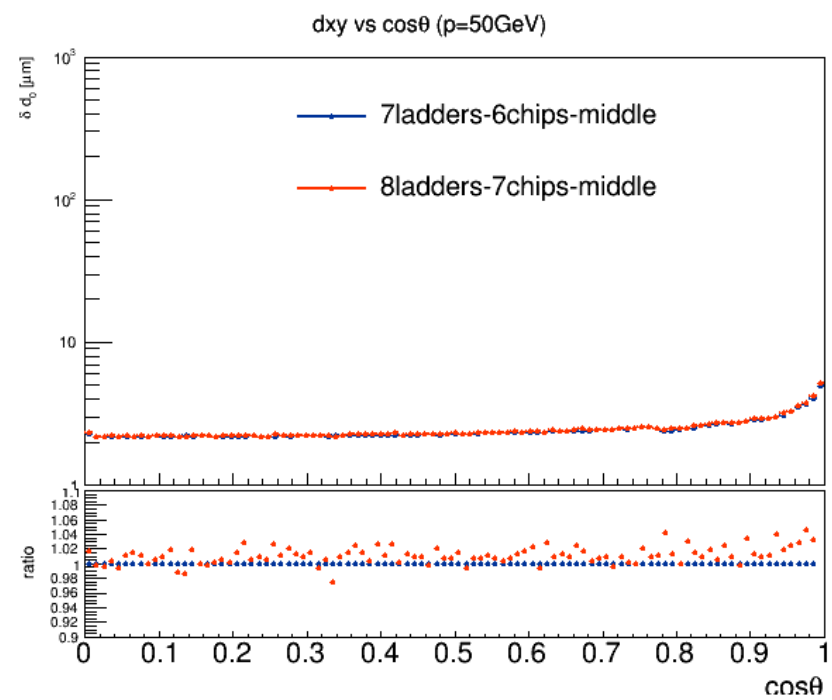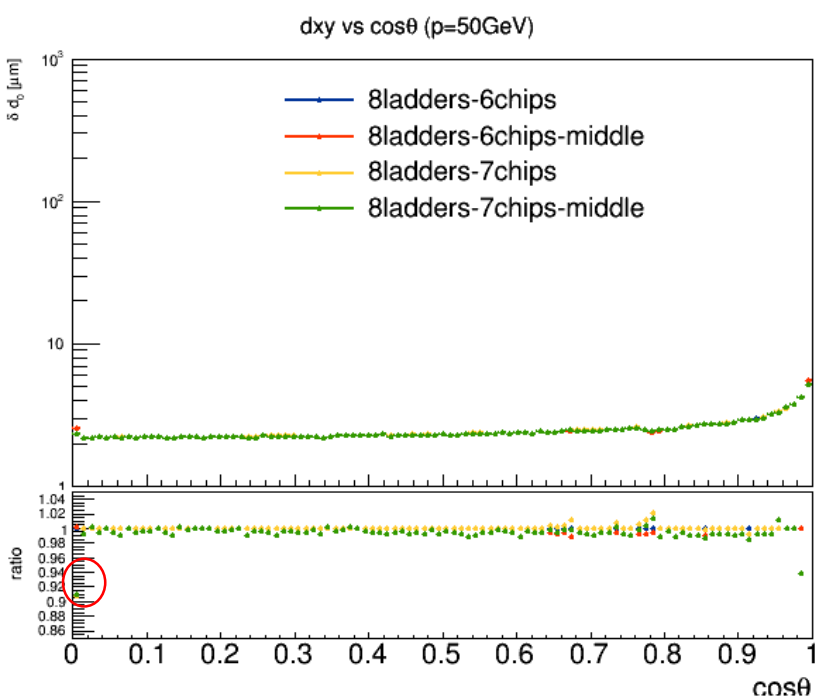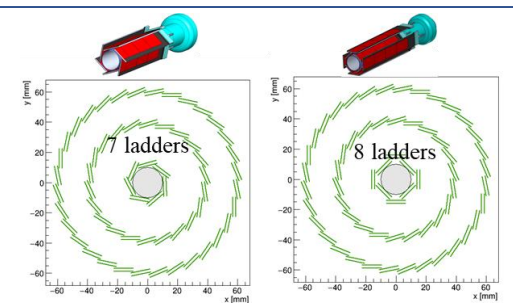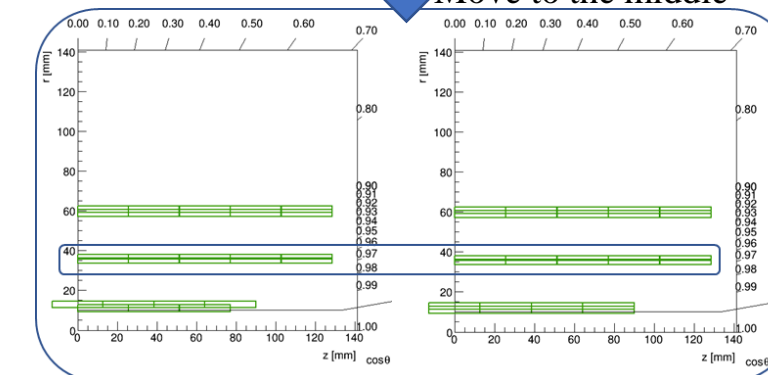

7 chips on both sides for innermost layer and second layer in the middle is better.

- 7-ladders arrangement is better than 8-ladders arrangement.
  - less material
  - 7 ladders are close to beam pipe.


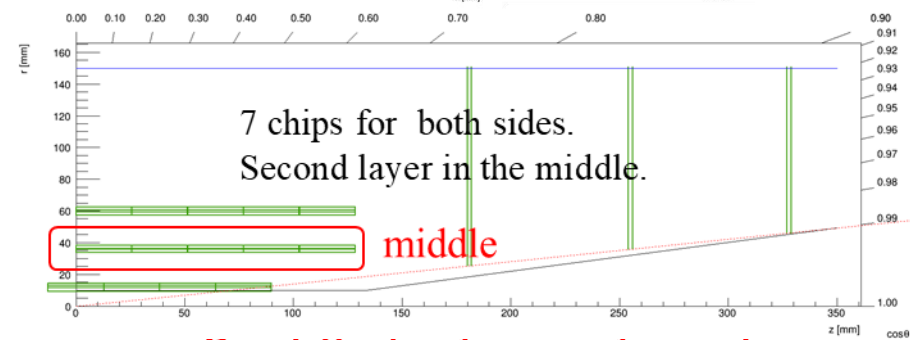


**Best! Optimal vertex layout!**

# Optimal vertex layout

The d0 resolution of optimal vertex layout is much better than realistic long barrel vertex and vertex\_v1 (realistic implementation of CDR vertex) layout, especially in the front region (20% and even more).

- smaller radius of beam pipe
- more disks
- longer innermost layer

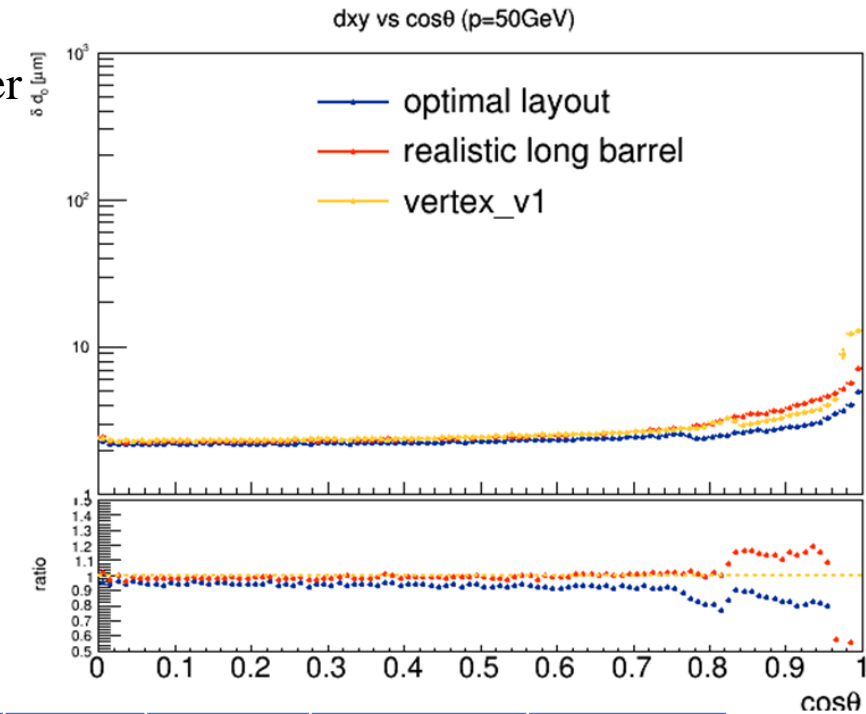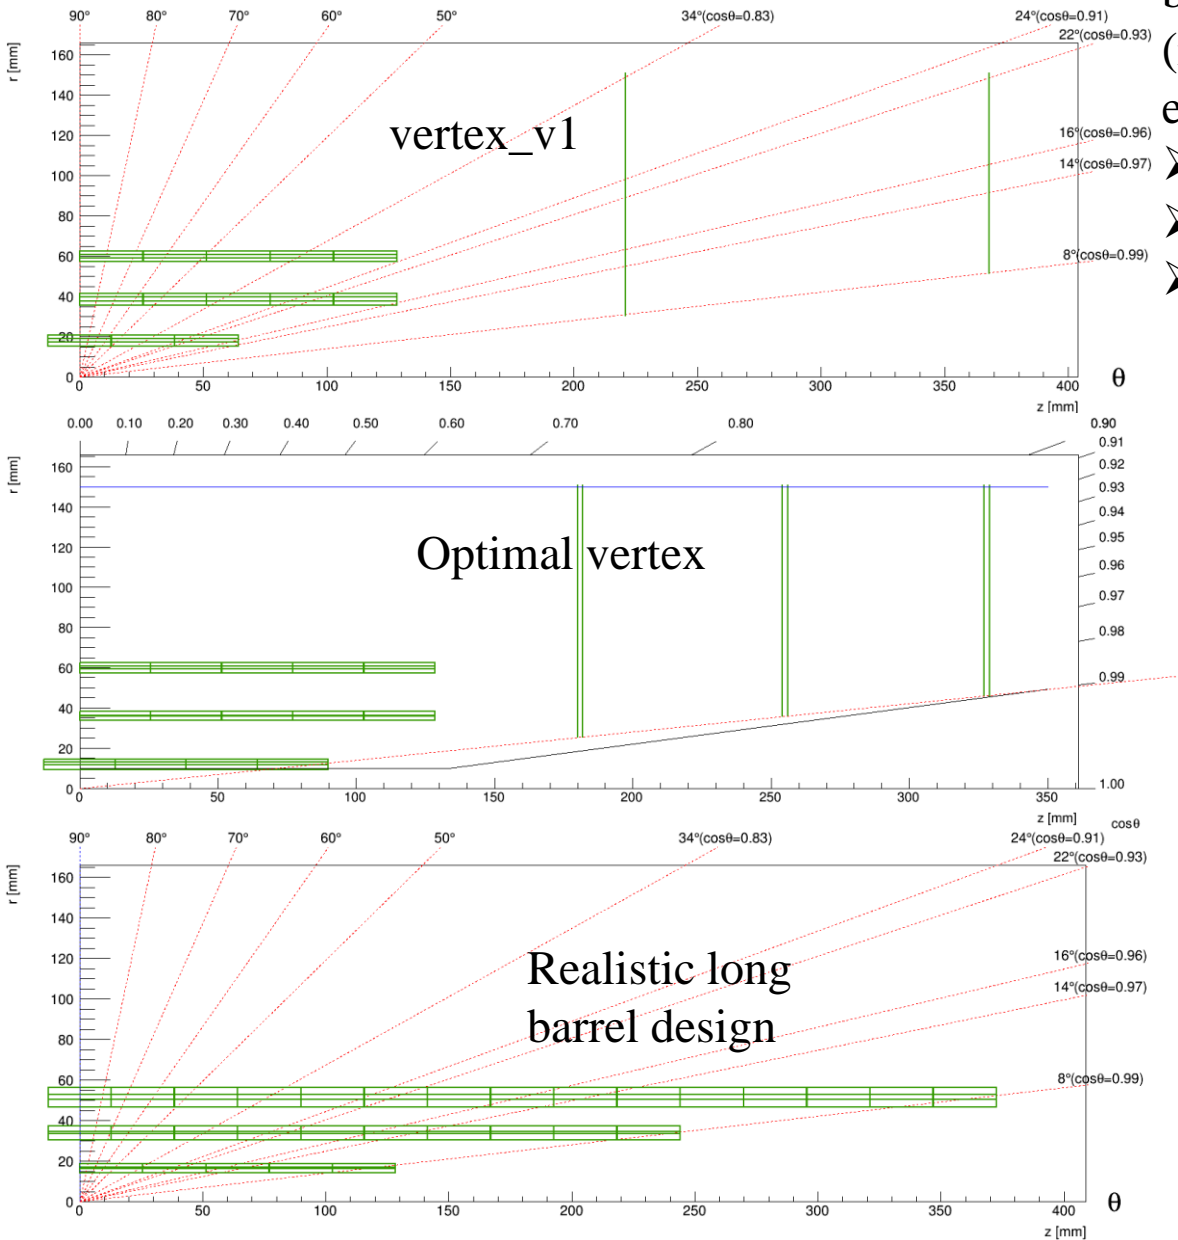

	Average R(mm)	# ladder		# chip on 1 ladder	Total # chips
Layer 1	12	7	L1_inner	7	49
			L1_outer	7	49
Layer 2	36	19	L2_inner	10	190
			L2_outer	10	190
Layer 3	60	32	L3_inner	10	320
			L3_outer	10	320
					1118


number of chips is reduced




backup

# Material budget vs $\cos\theta$


Radiation Length by Component(He + Au)

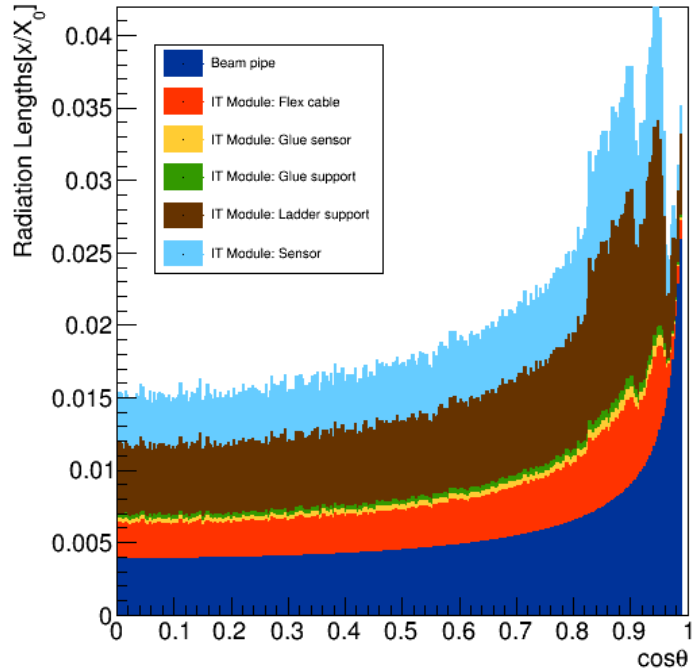

Radiation Length by Component(paraffin + Au)

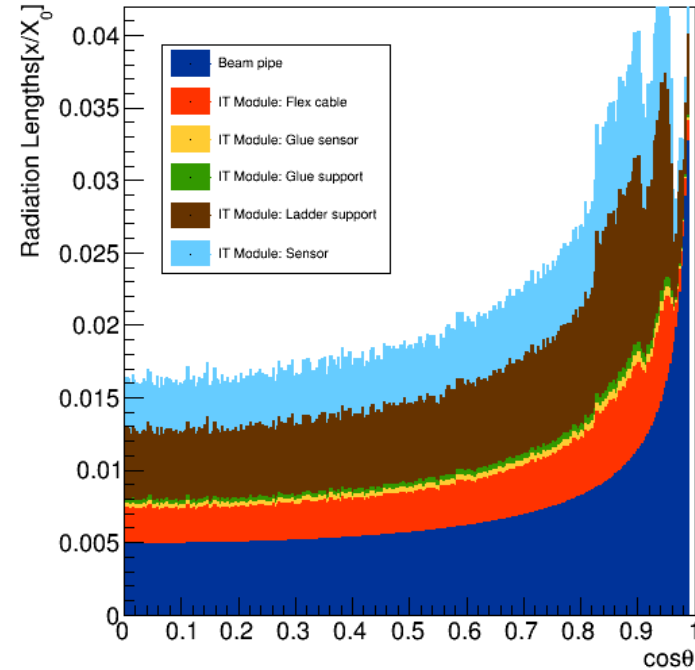

Radiation Length by Component(CDR)






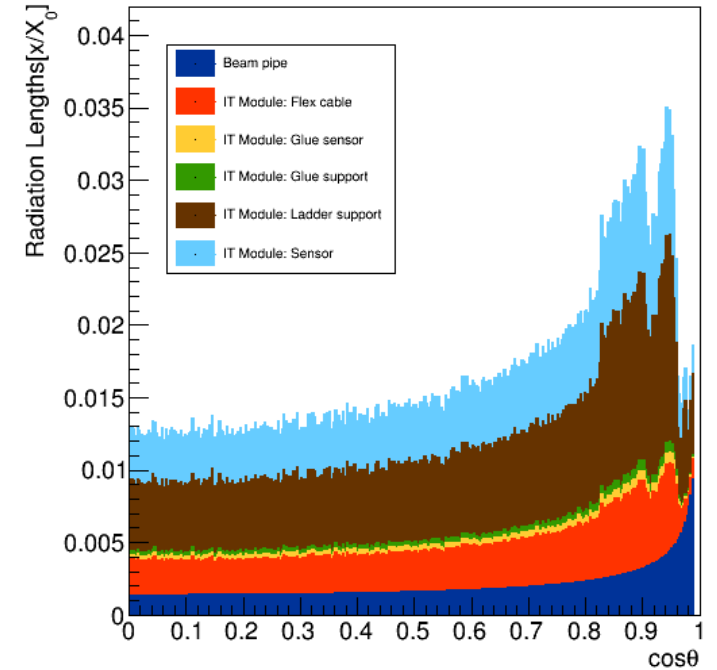


Average ( $\cos\theta = [0, 0.99]$ )	Radiation length
Beam pipe	0.00558
IT Module: Flex cable	0.00312
IT Module: Glue sensor	0.00037
IT Module: Glue support	0.00037
IT Module: Ladder support	0.00643
IT Module: Sensor	0.00444
total	0.02031







Average ( $\cos\theta = [0, 0.99]$ )	Radiation length
Beam pipe	0.00707
IT Module: Flex cable	0.00312
IT Module: Glue sensor	0.00037
IT Module: Glue support	0.00037
IT Module: Ladder support	0.00643
IT Module: Sensor	0.00444
total	0.02180

Average ( $\cos\theta = [0, 0.99]$ )	Radiation length
Beam pipe	0.00203
IT Module: Flex cable	0.00312
IT Module: Glue sensor	0.00037
IT Module: Glue support	0.00037
IT Module: Ladder support	0.00643
IT Module: Sensor	0.00444
Total	0.01676







# CDR barrel with different disk

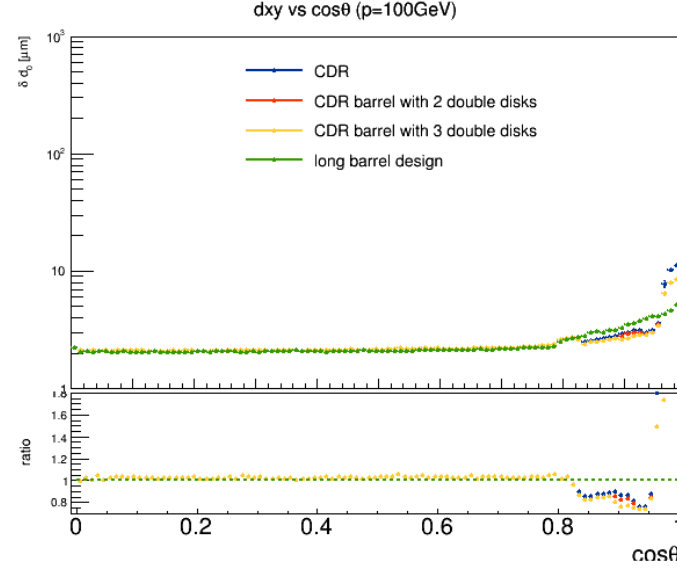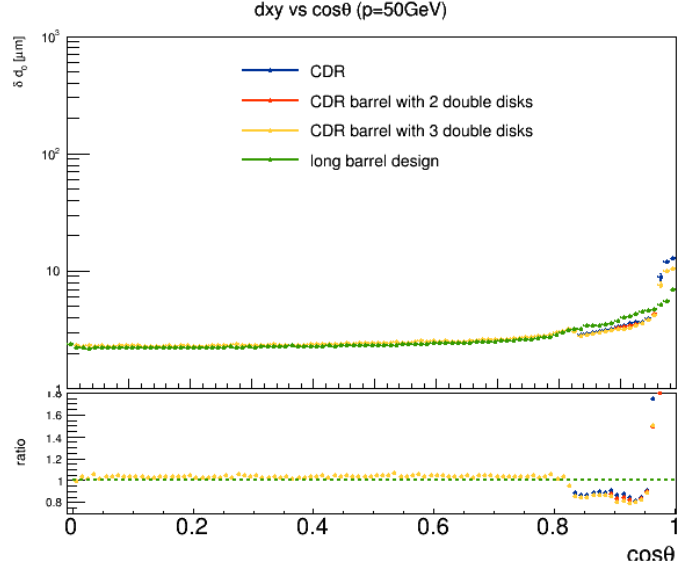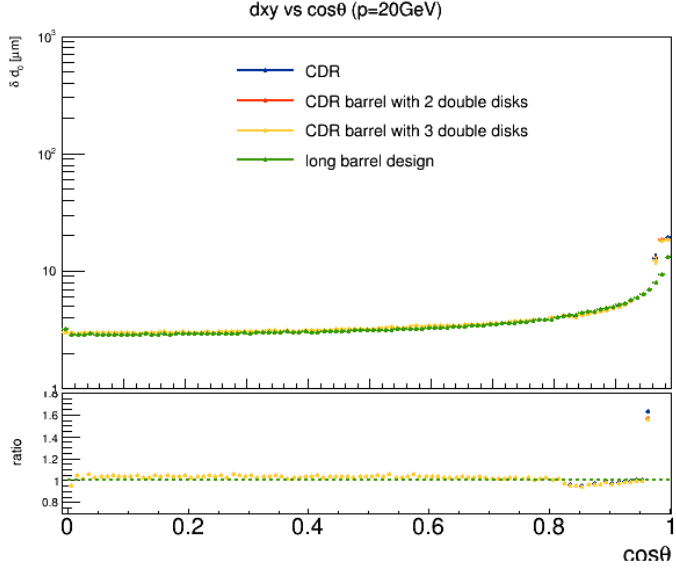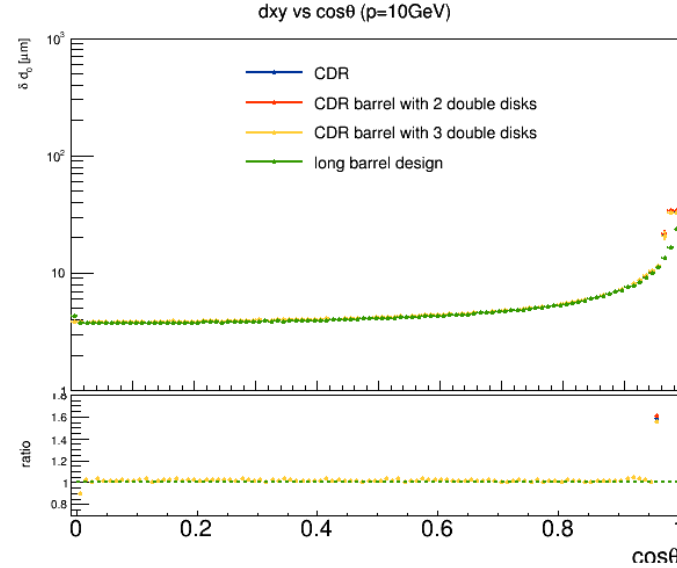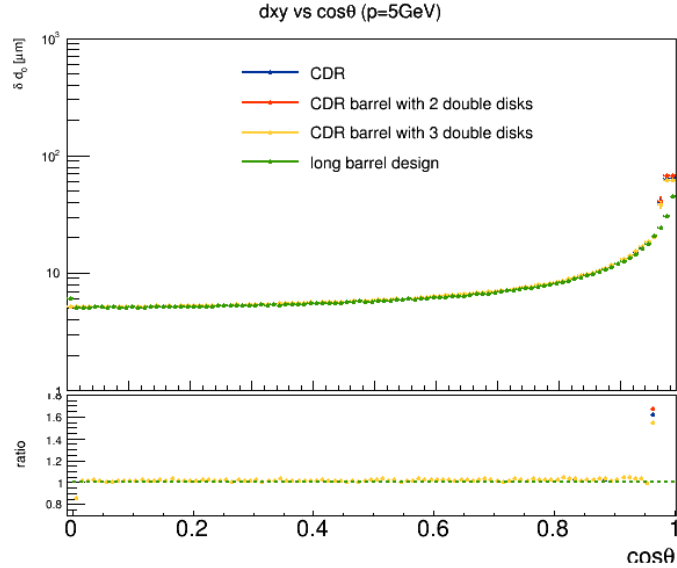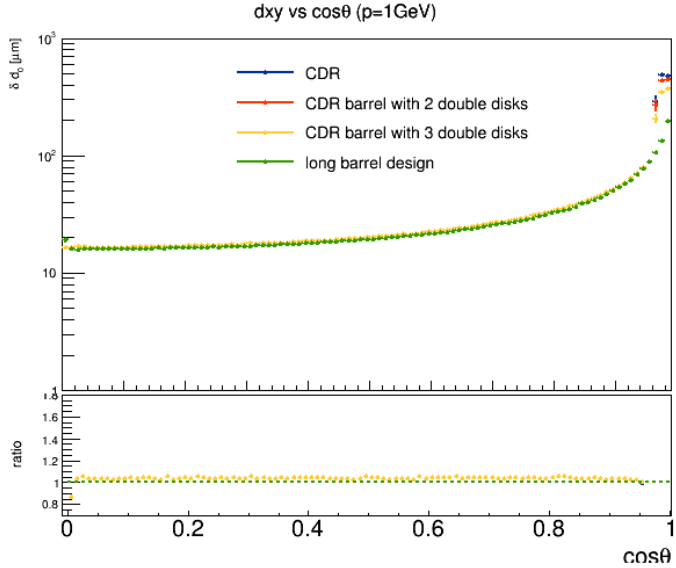







# Longer first layer

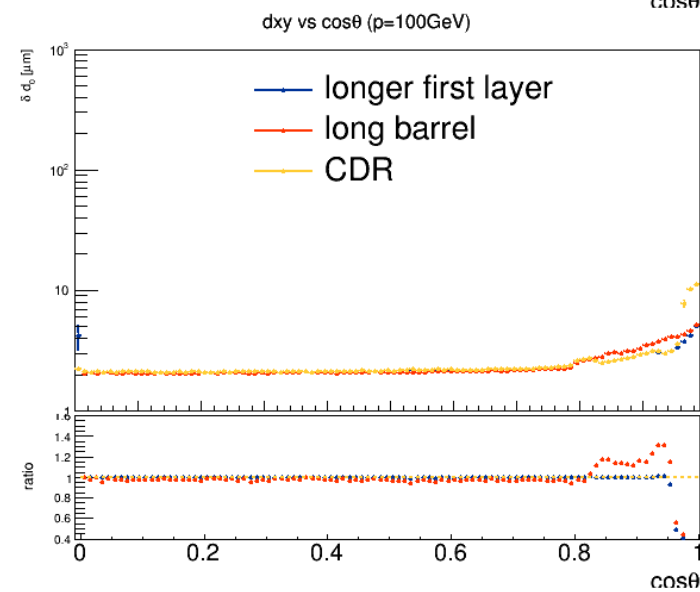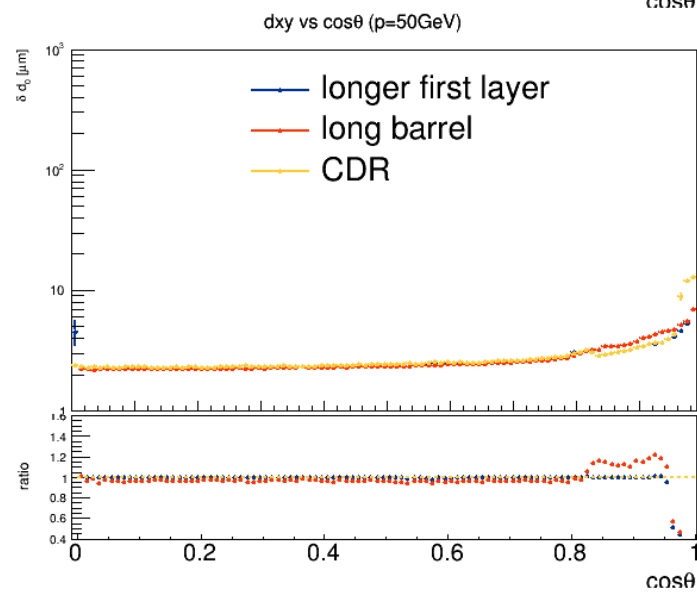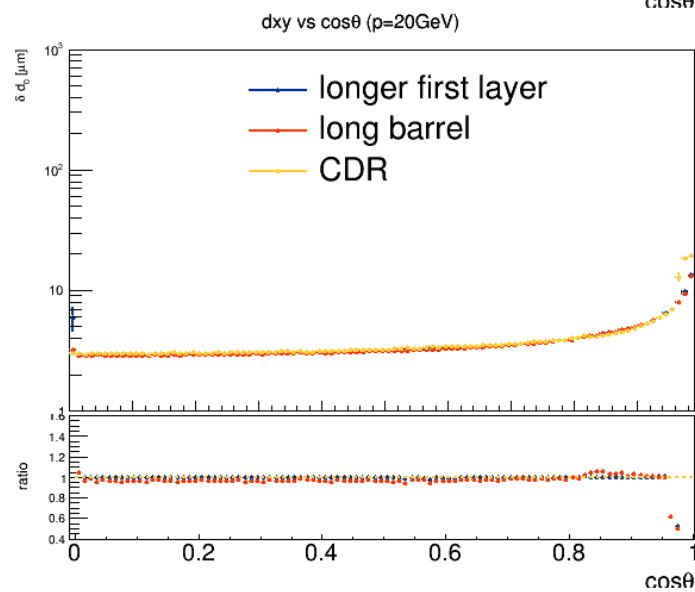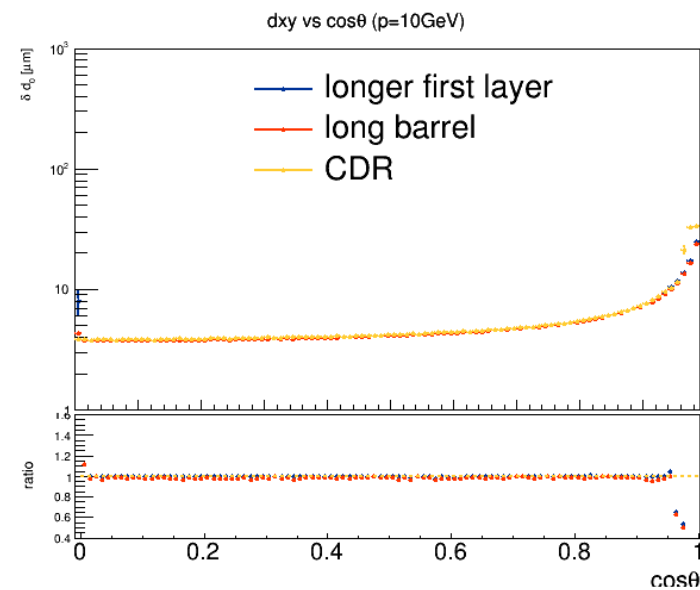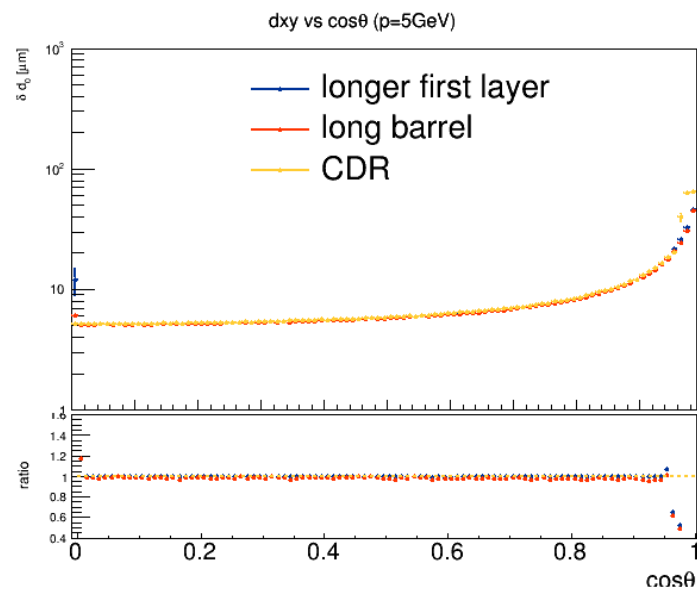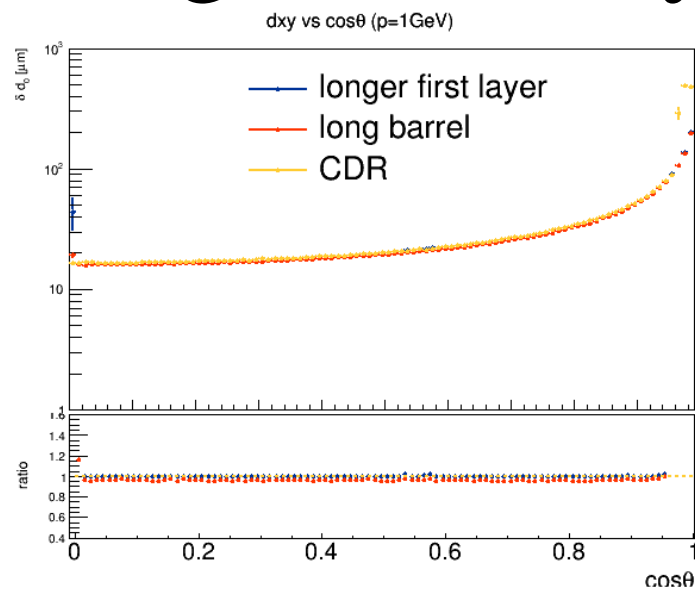







# Different position of 2 single-layer disks

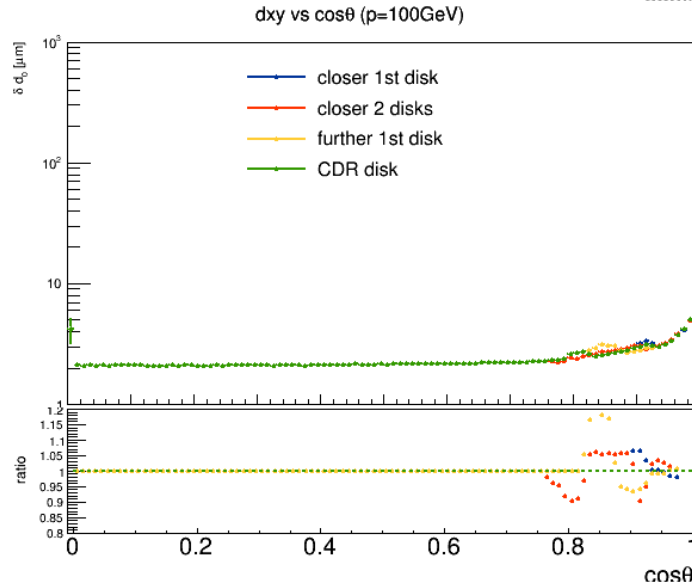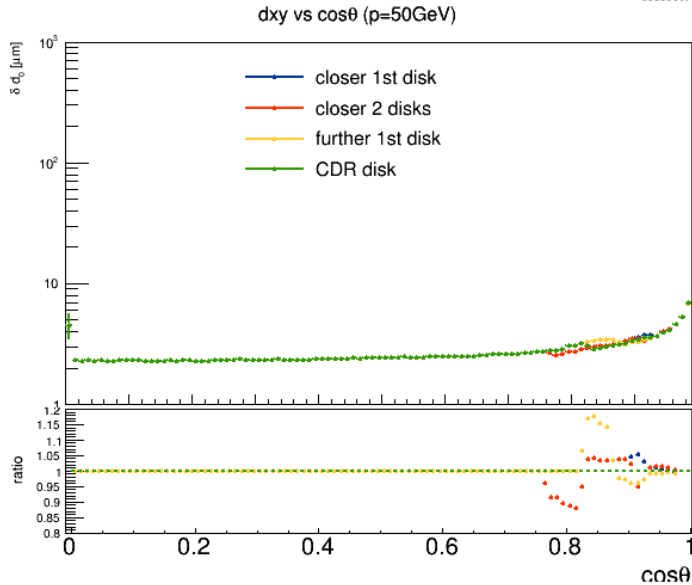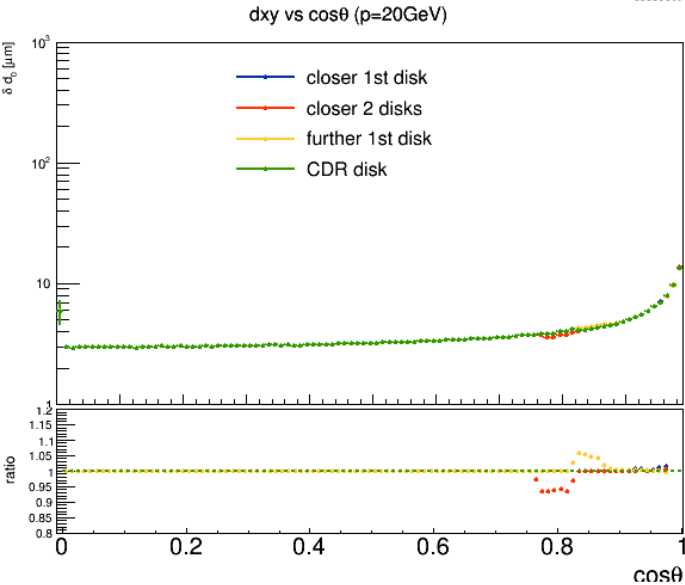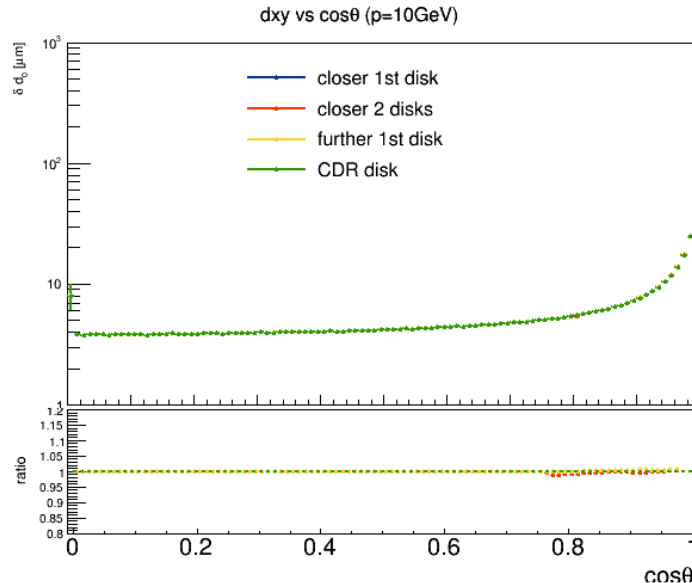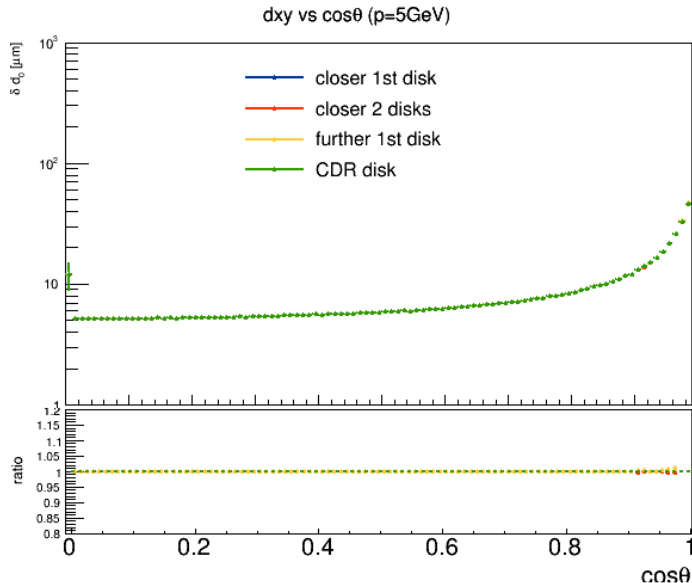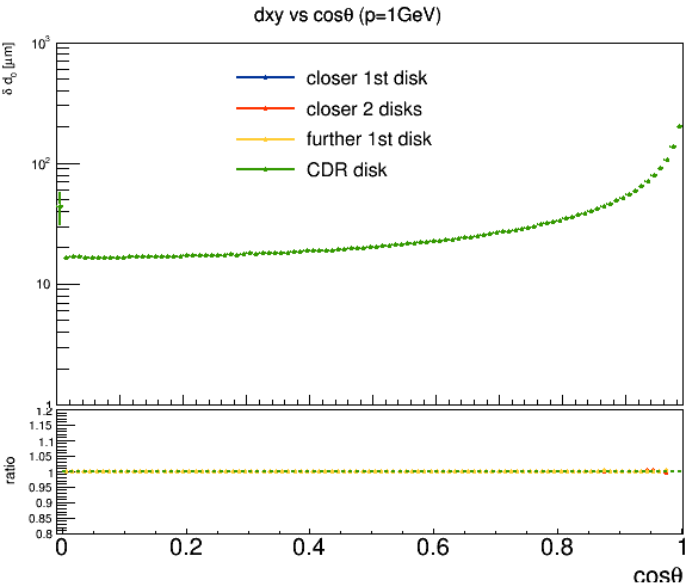







# Longer first layer with different number of disk

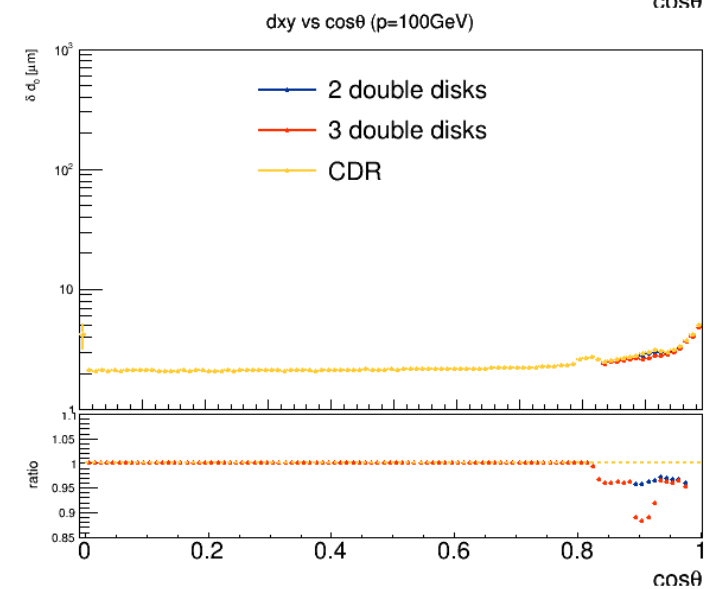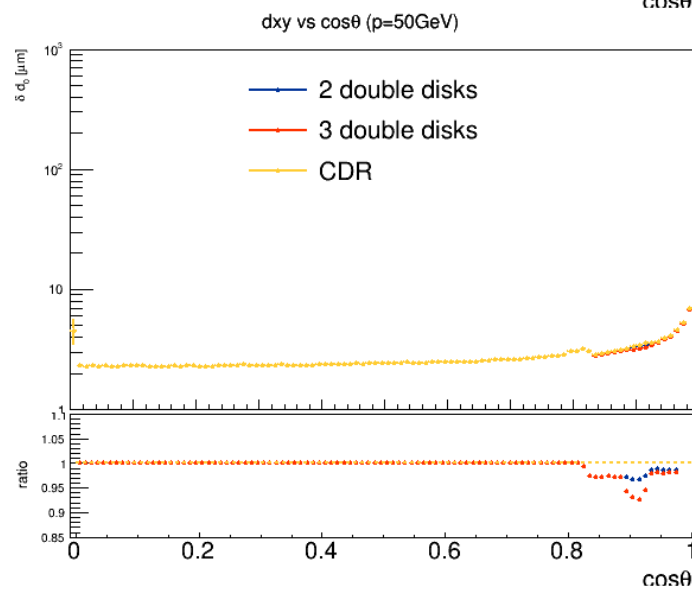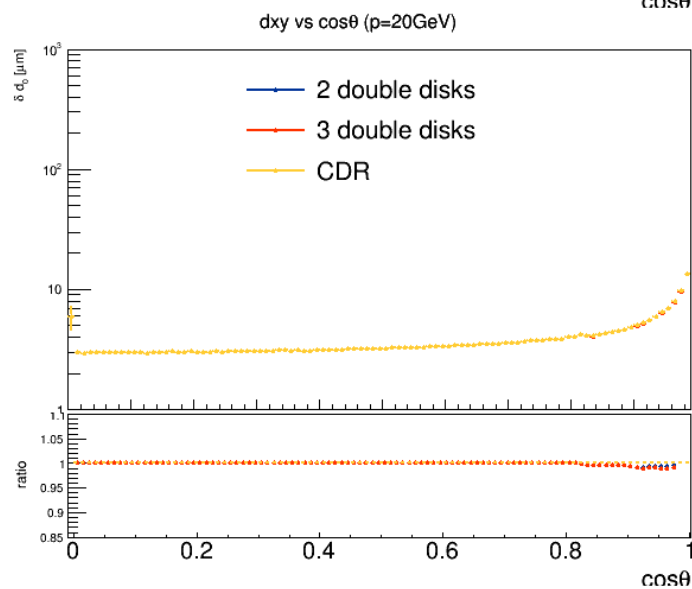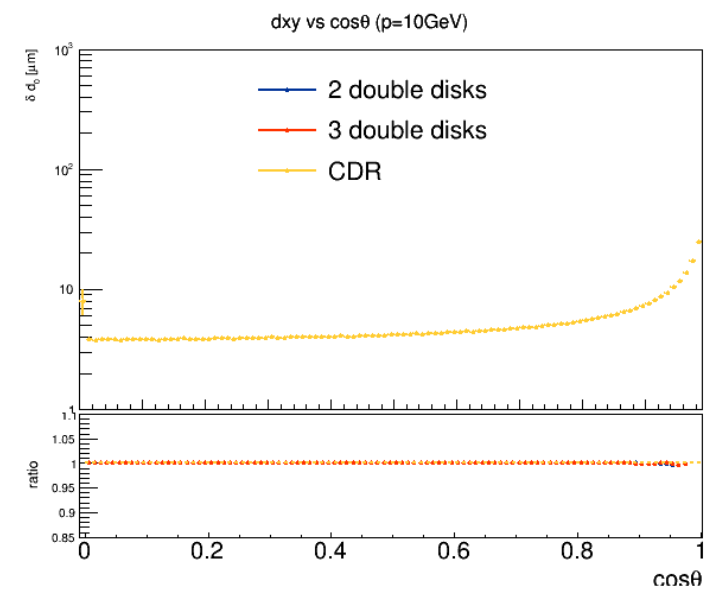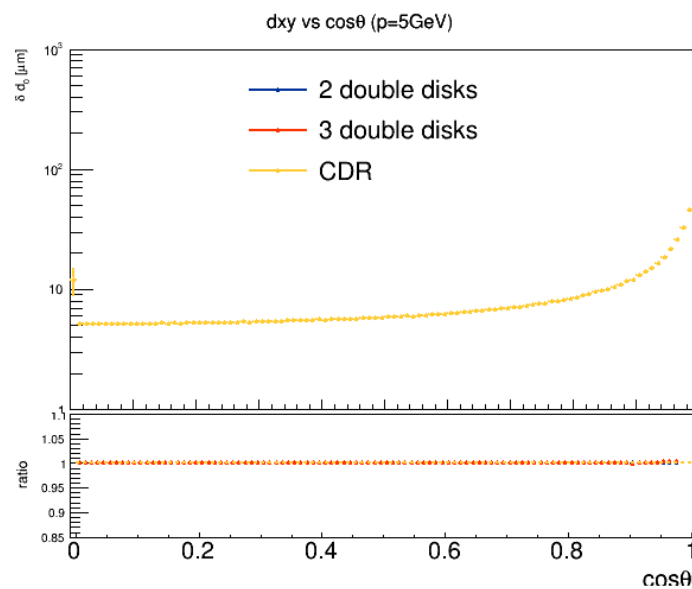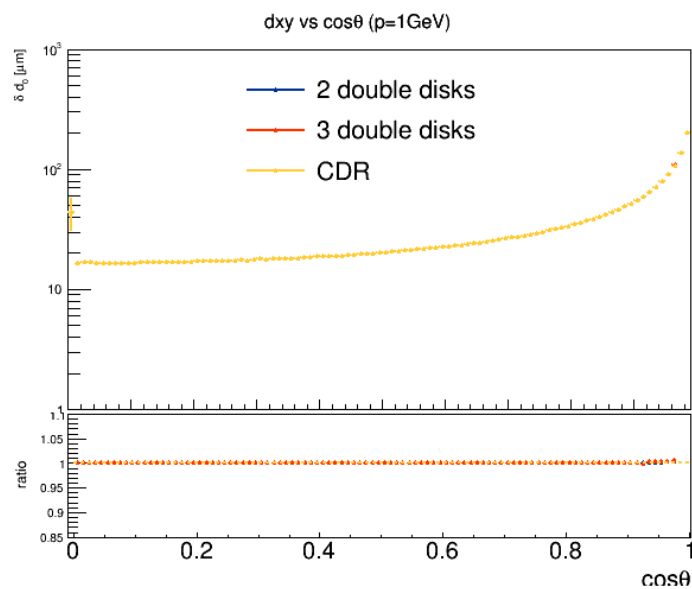

# 3 double-layer disks closer to barrel

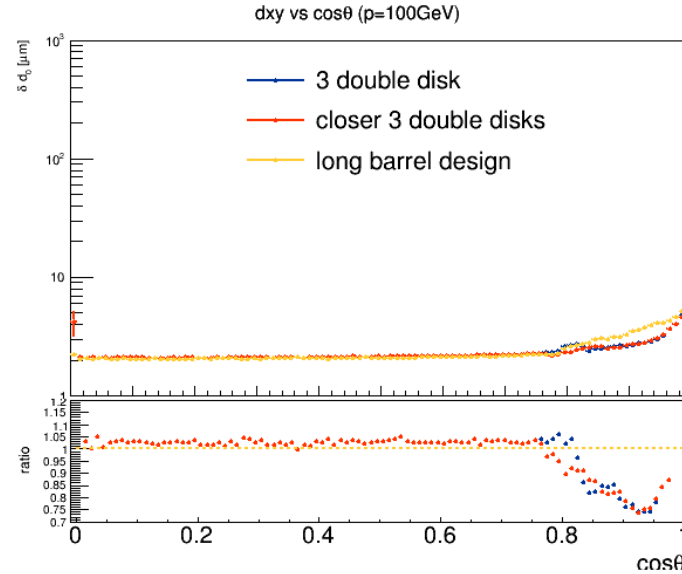
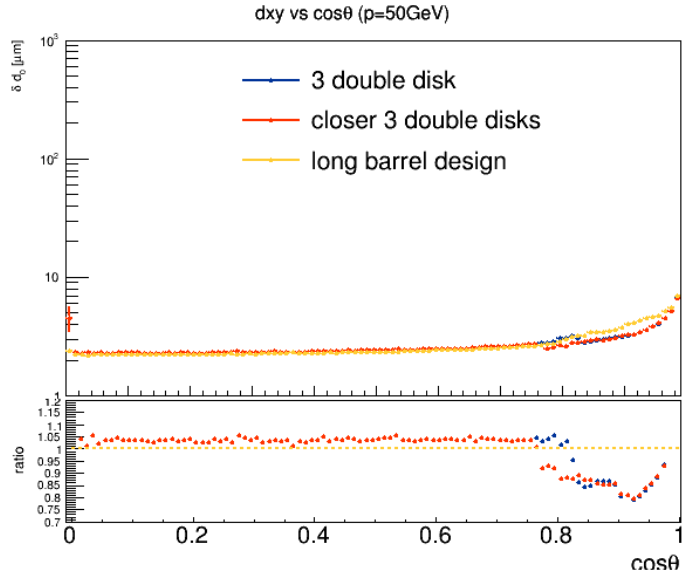
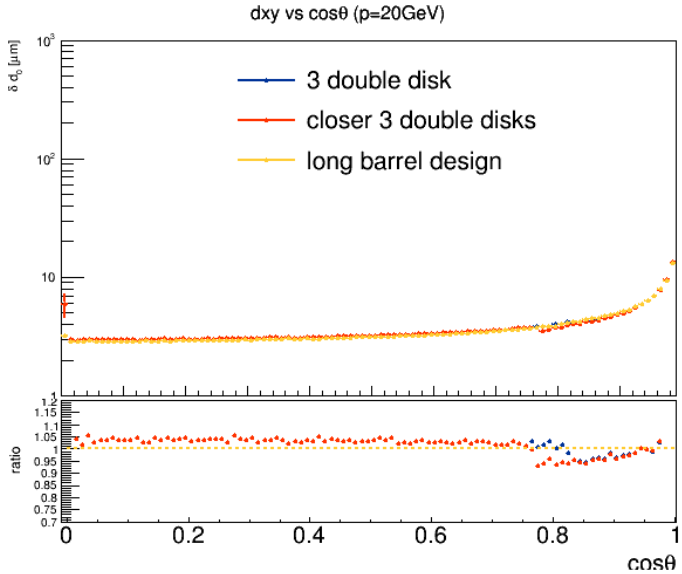
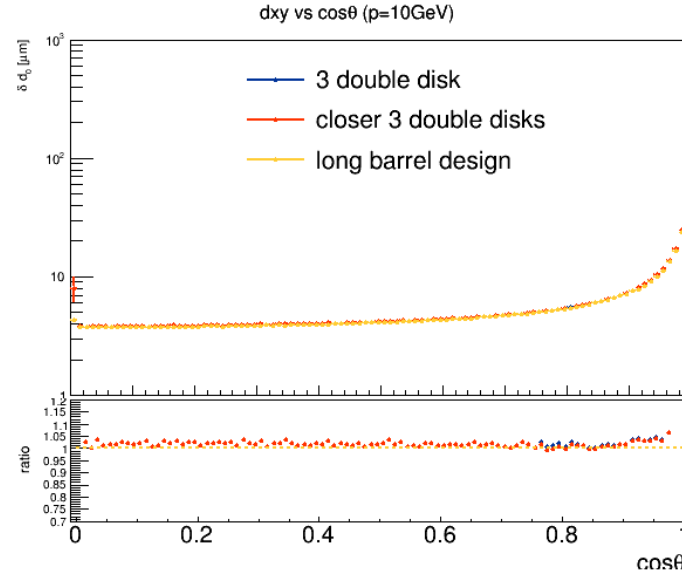
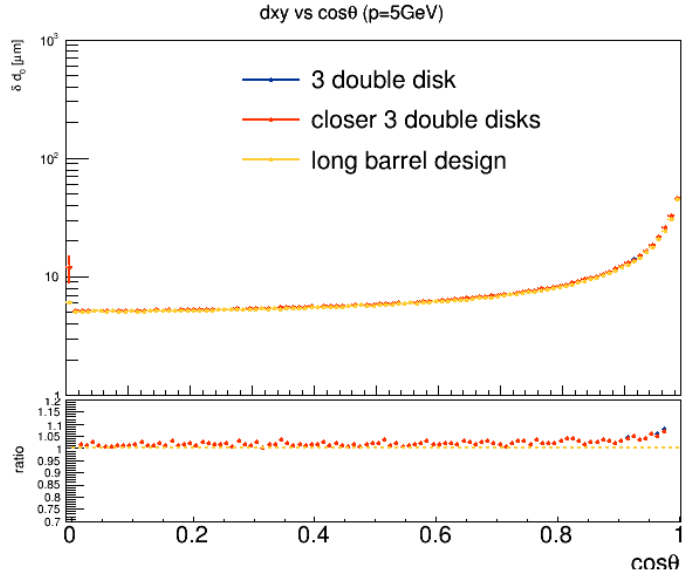
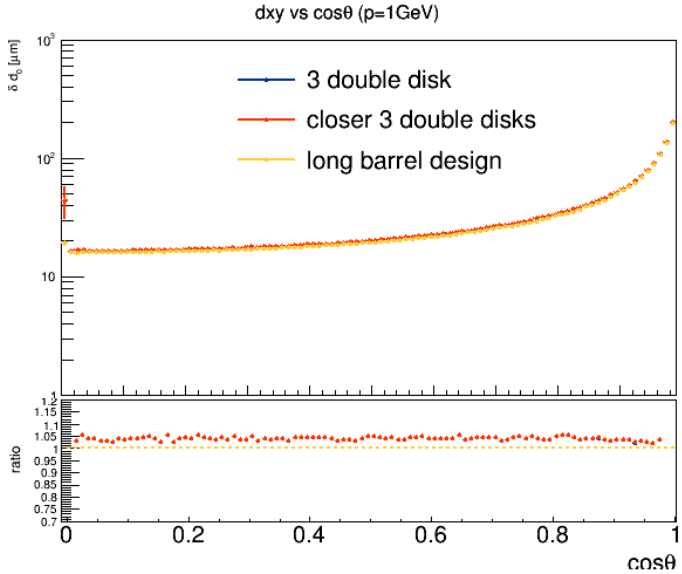


# Optimal layout

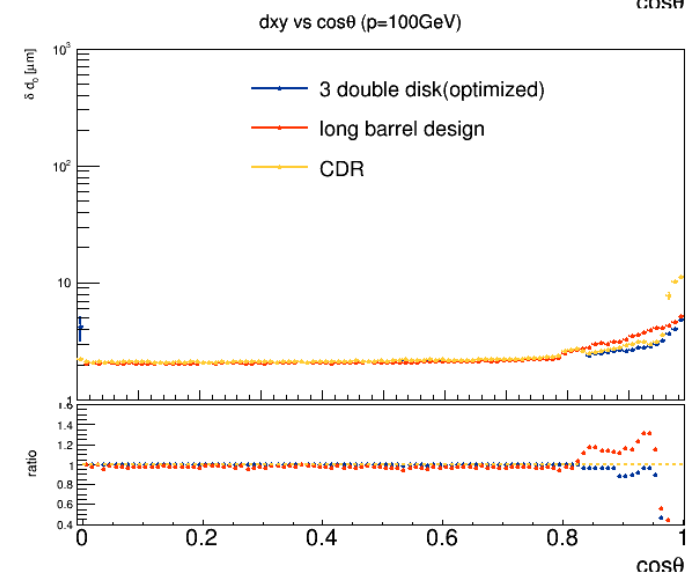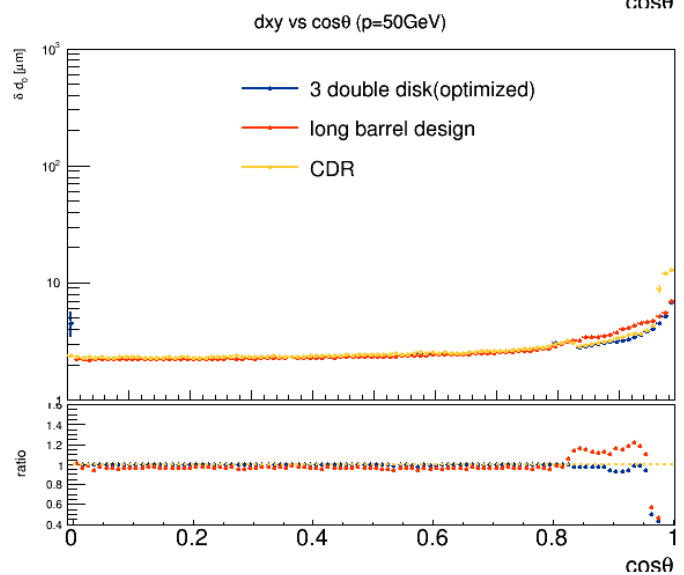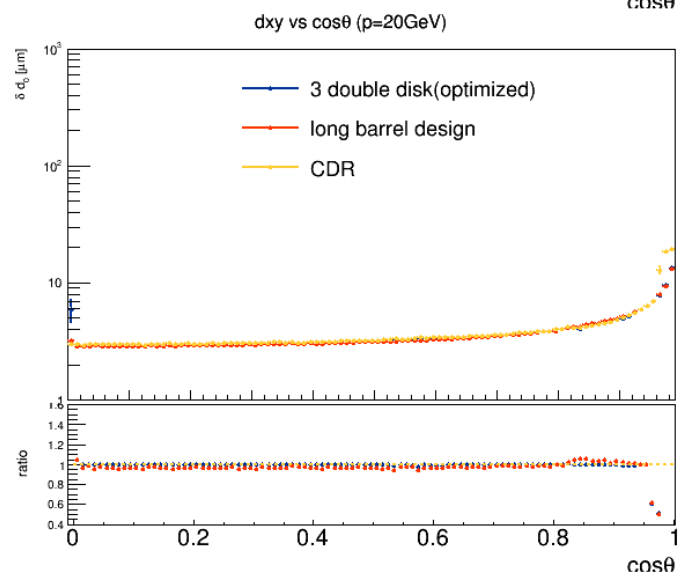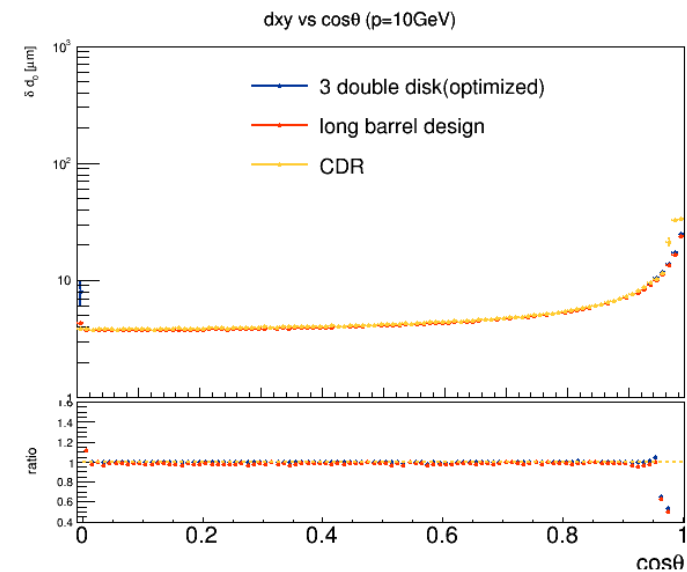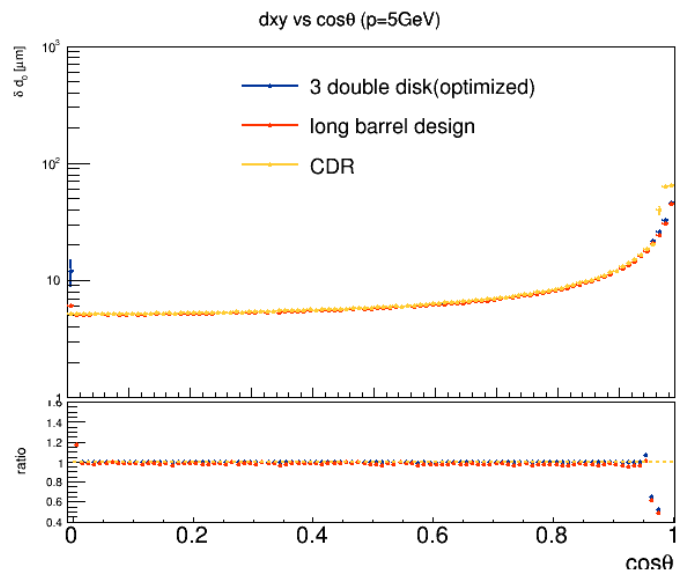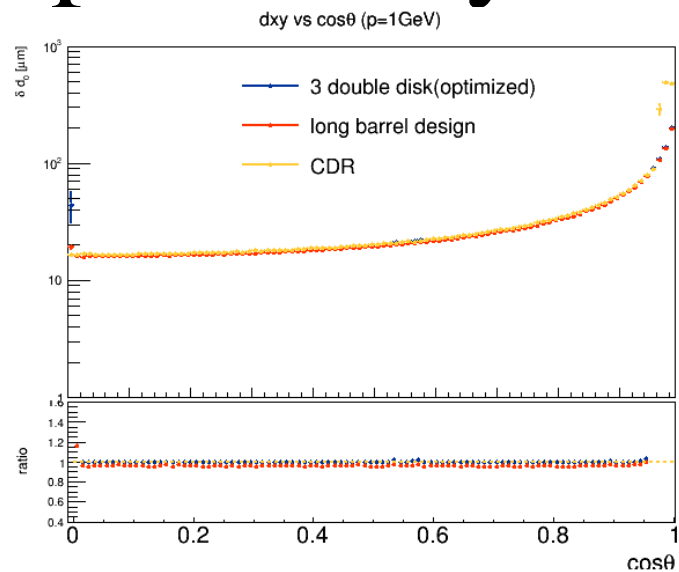



# New disk arrangements

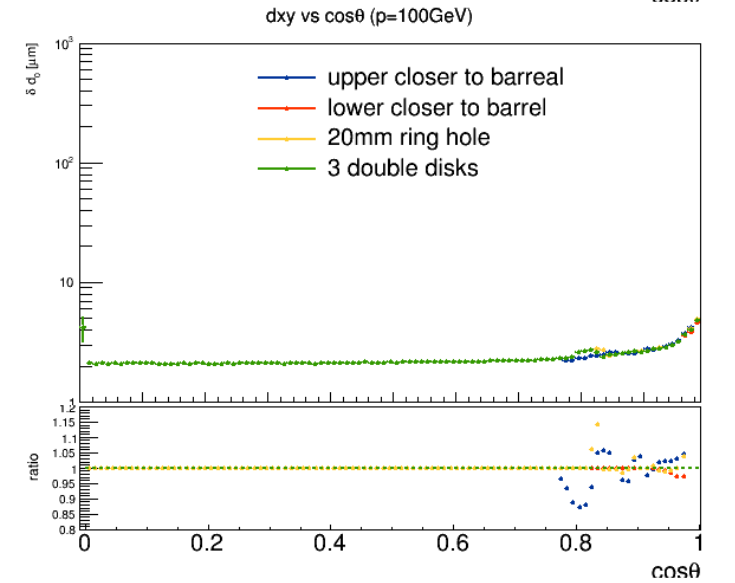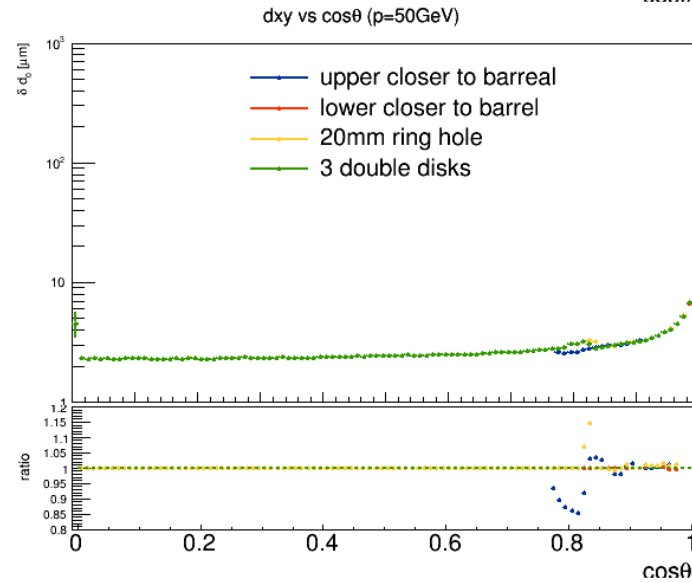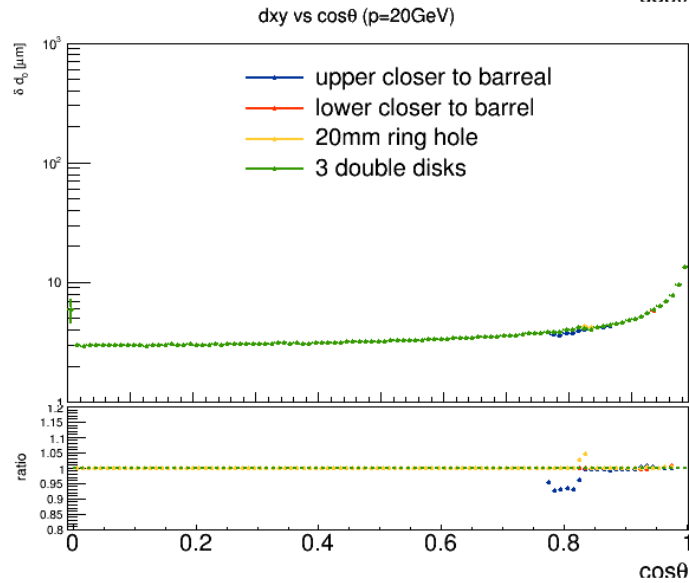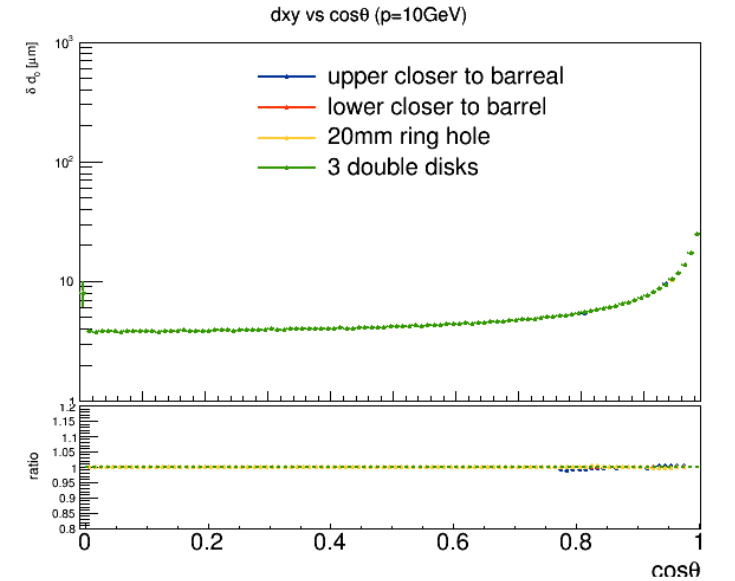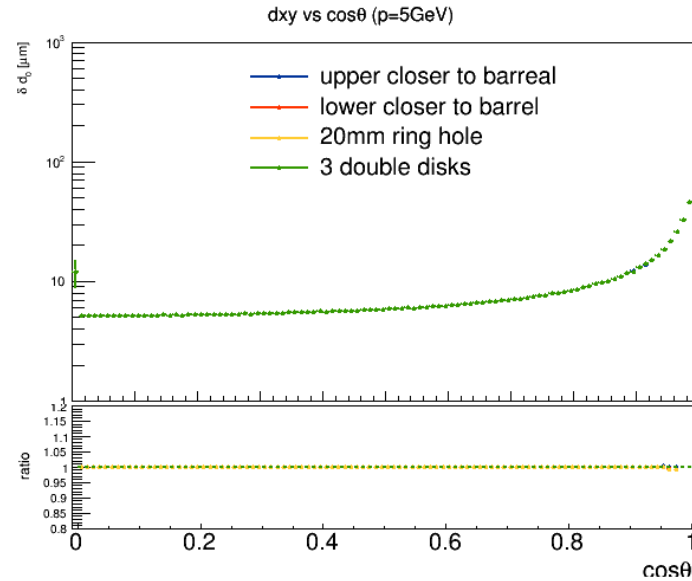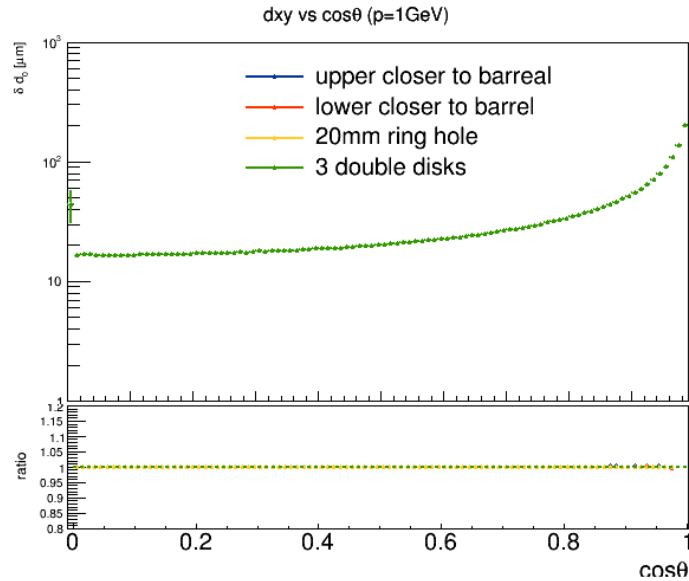

# Optimization thickness of beryllium pipe

Relationship table between diameter, thickness and pressure: ( $\Phi 63\text{mm}$ )

BESIII(63)	inner <i>Be</i> pipe	R1(inner radius)	thickness	Gap	R2(outer radius)	R	E(GPa)	$\mu$	Pcr(MPa)	
		31.5	0.8	0.8	32.3	31.9	303	0.1	1.2068	
	outer <i>Be</i> pipe		$\delta e$	Di			$[\sigma]^t$	$\Phi$		Pw(MPa)
		33.1	0.6	66.2	33.7		110	1		1.9760

Relationship table between diameter, thickness and pressure: ( $\Phi 28\text{mm}$ )

CEPC(28)	inner <i>Be</i> pipe	R1(inner radius)	thickness	Gap	R2(outer radius)	R	E(GPa)	$\mu$	Pcr(MPa)	
		14	0.35	0.5	14.35	14.175	303	0.1	1.1518	
(safety)	outer <i>Be</i> pipe		$\delta e$	Di			$[\sigma]^t$	$\Phi$		Pw(MPa)
		14.85	0.25	29.7	15.1		110	1		1.8364

CEPC(28)	inner <i>Be</i> pipe	R1(inner radius)	thickness	Gap	R2(outer radius)	R	E(GPa)	$\mu$	Pcr(MPa)	
(Performance)		14	0.3	0.5	14.3	14.15	303	0.1	0.7292	
	outer <i>Be</i> pipe		$\delta e$	Di			$[\sigma]^t$	$\Phi$		Pw(MPa)
		14.8	0.2	29.6	15		110	1		1.4765

Relationship table between diameter, thickness and pressure: ( $\Phi 20\text{mm}$ )

CEPC(20)	inner <i>Be</i> pipe	R1(inner radius)	thickness	Gap	R2(outer radius)	R	E(GPa)	$\mu$	Pcr(MPa)	
		10	0.25	0.5	10.25	10.125	303	0.1	1.1518	
(safety)	Al pipe	10	0.5		10.5	10.25	68.2	0.32	2.2049	
	outer <i>Be</i> pipe		$\delta e$	Di			$[\sigma]^t$	$\Phi$		Pw(MPa)
		10.75	0.2	21.5	10.95		110	1		2.0276

CEPC(20)	inner <i>Be</i> pipe	R1(inner radius)	thickness	Gap	R2(outer radius)	R	E(GPa)	$\mu$	Pcr(MPa)	
(Performance)		10	0.2	0.5	10.2	10.1	303	0.1	0.5941	
	Al pipe	10	0.5		10.5	10.25	68.2	0.32	2.2049	
	outer <i>Be</i> pipe		$\delta e$	Di			$[\sigma]^t$	$\Phi$		Pw(MPa)
		10.7	0.15	21.4	10.85		110	1		1.5313

*The thinner the Beryllium pipe*

The less the mass

*The better the performance*

The optimization results show:  
Under the same flow channel pressure,  
The smaller the diameter,  
the smaller the thickness

In the choice of thickness, we have two options

- Safety first

inner diameter  $\Phi 28\text{mm}$

Thickness of outer Be pipe: 0.35 mm  
Thickness of inner Be pipe: 0.25 mm

- performance first

inner diameter  $\Phi 20\text{mm}$












Thickness of outer Be pipe: 0.25 mm  
Thickness of inner Be pipe: 0.20 mm

- performance first

Thinner (As shown in the left table)



# 7 ladders arrangement for innermost layer

0.1 mm gap between two adjacent chips

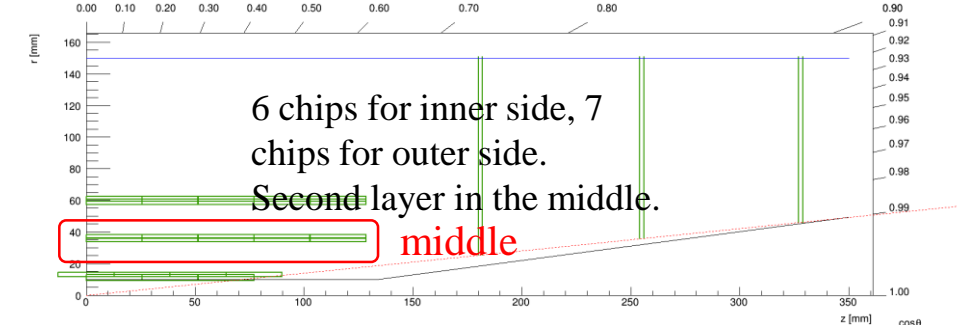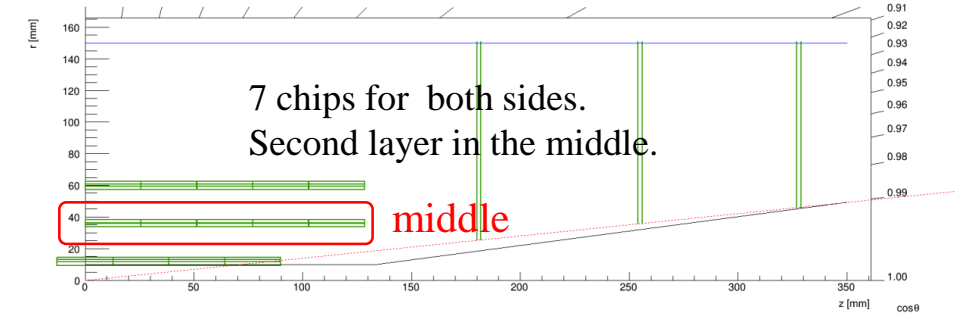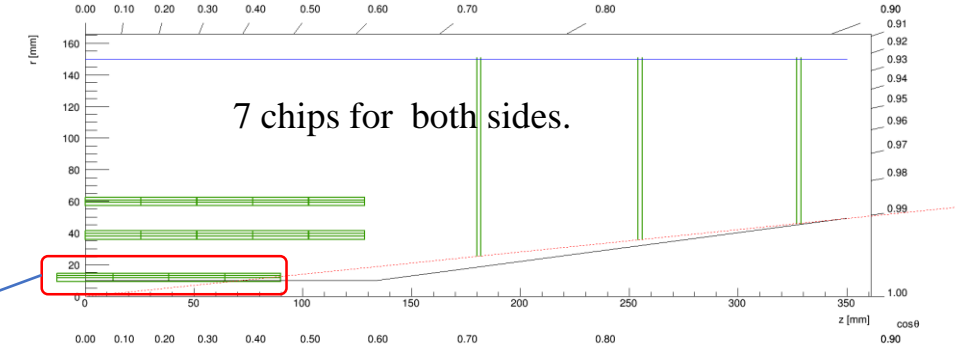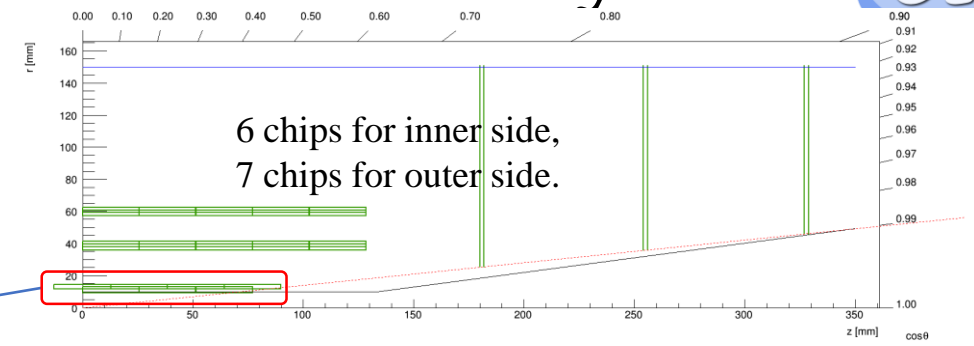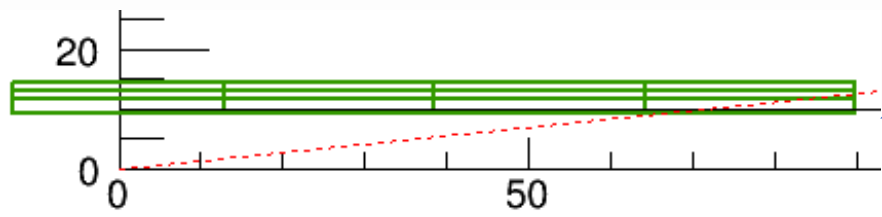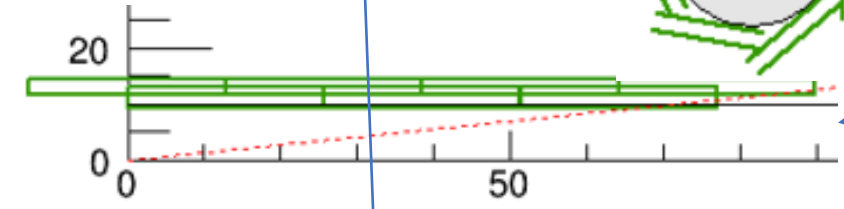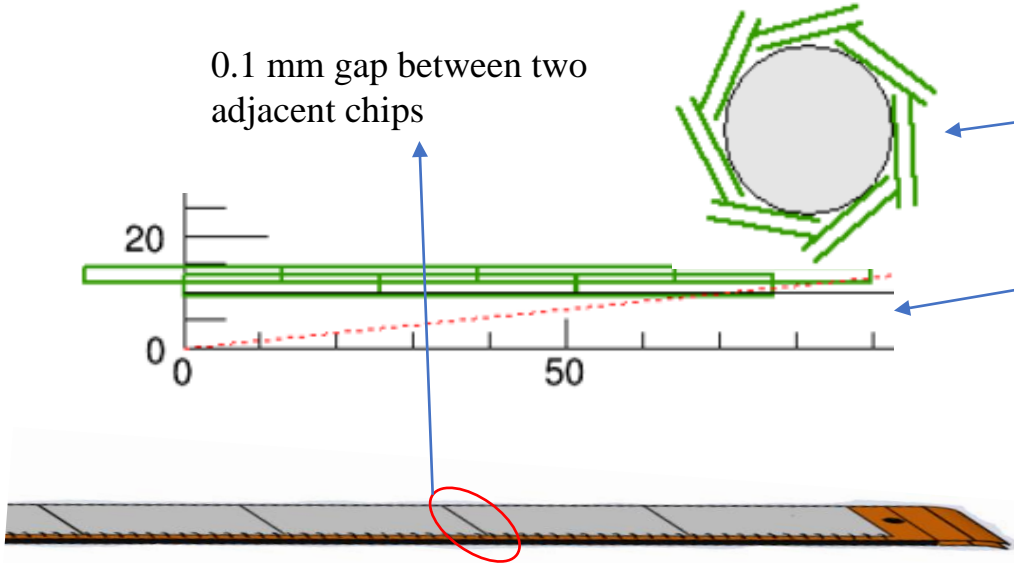


# 7 ladders arrangement for innermost layer





- The effect of whether placing second layer in the middle or not on  $d_0$  resolution is very small.
- Using 7 ladders for the innermost layer improves  $d_0$  resolution a lot at  $\cos\theta=0$ .
- For mechanical consideration, I prefer placing second layer in the middle.

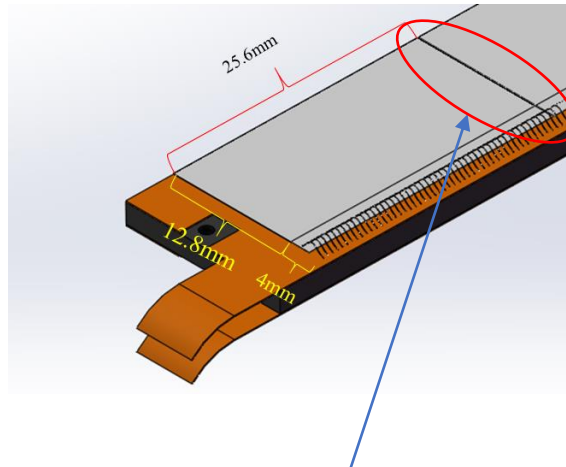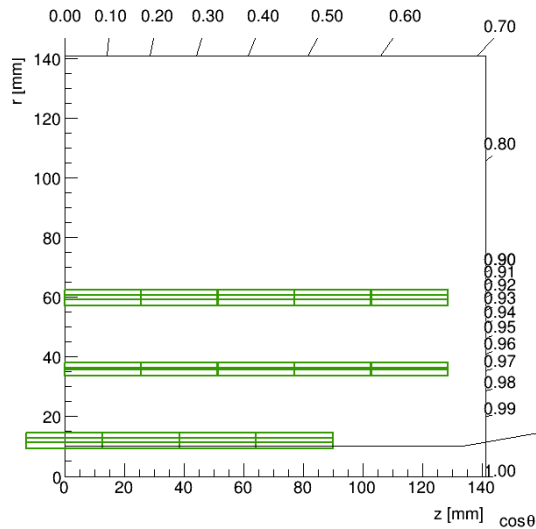












0.1 mm gap between two adjacent chips

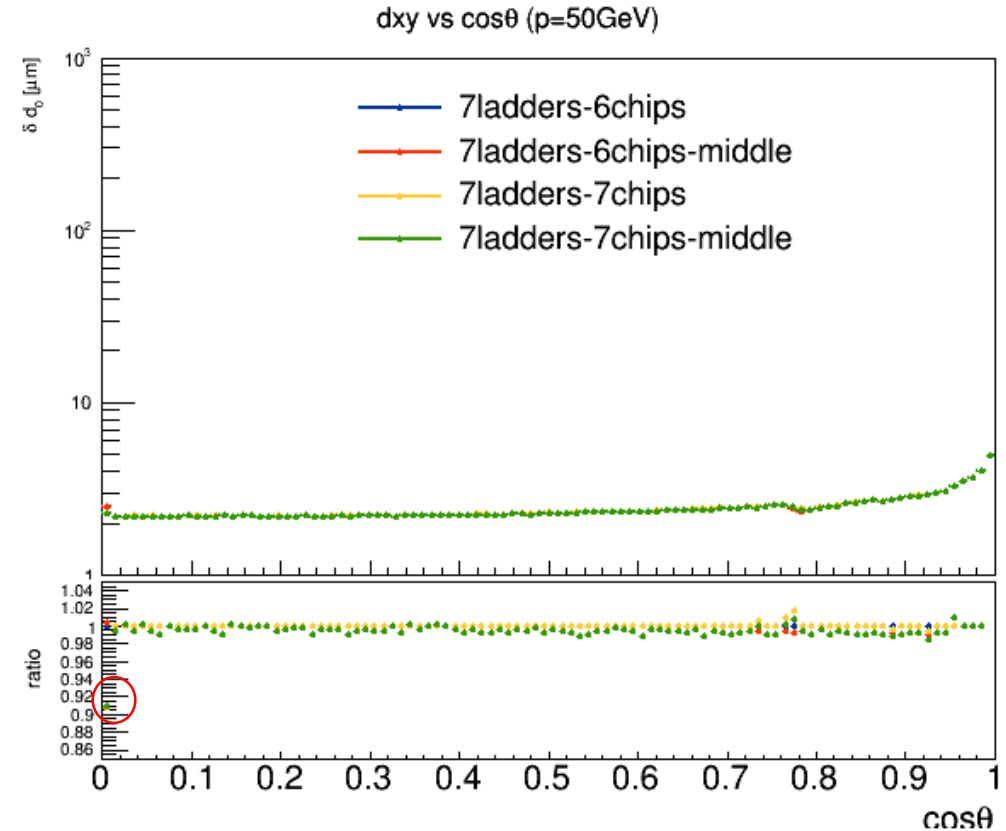







# 8 ladders arrangement for innermost layer

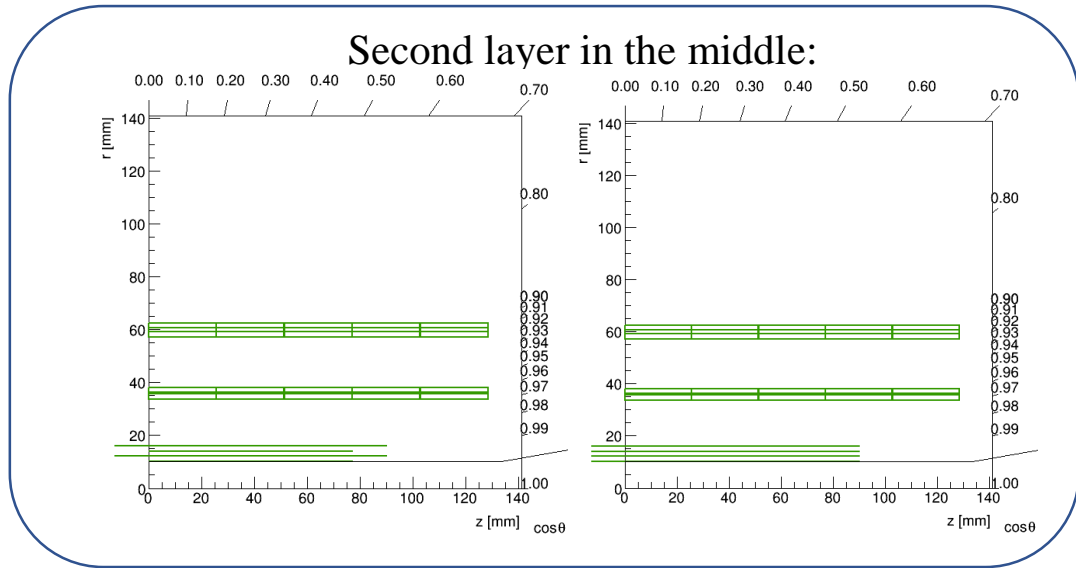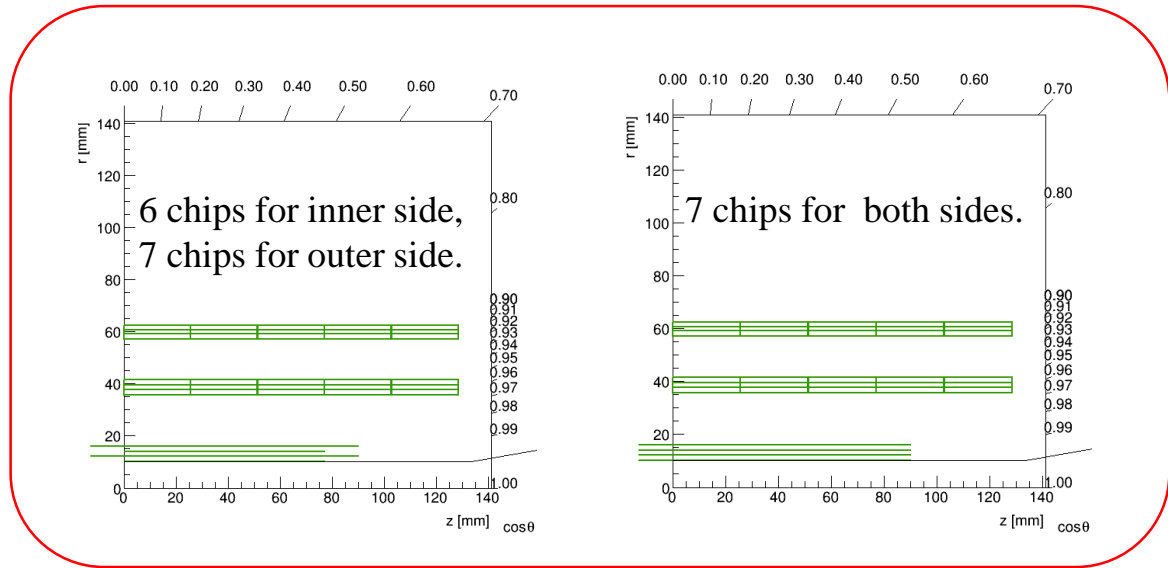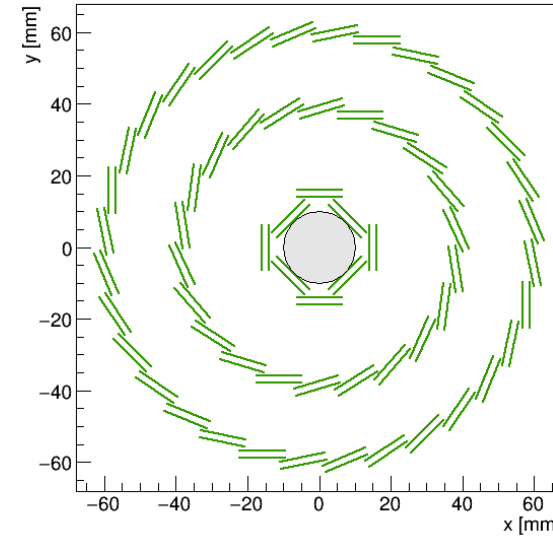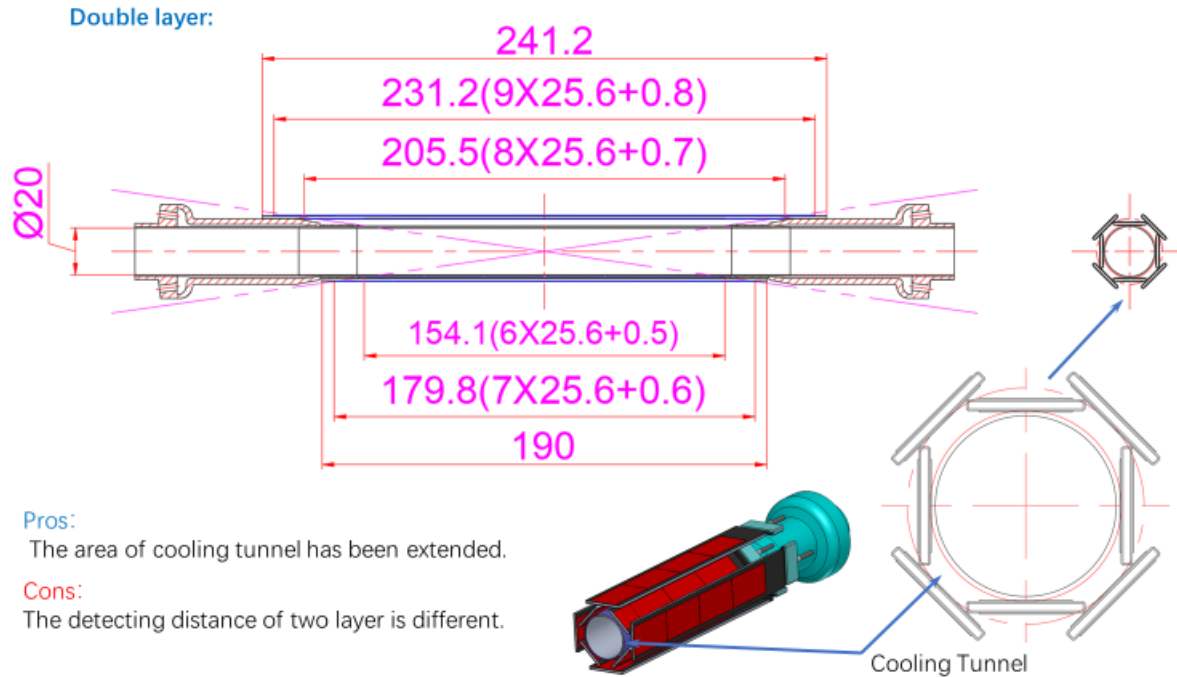







# 8 ladders arrangement for innermost layer

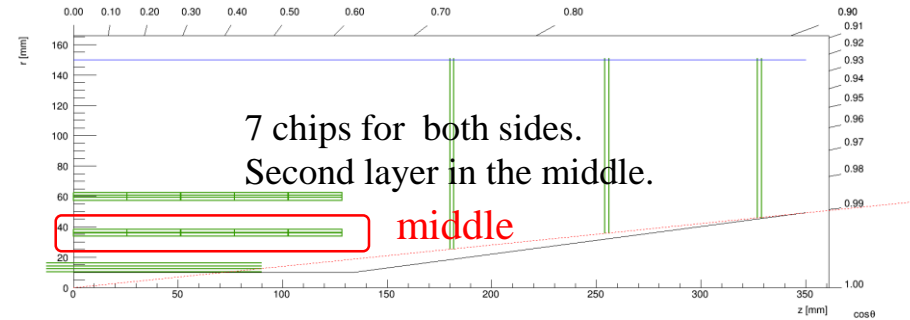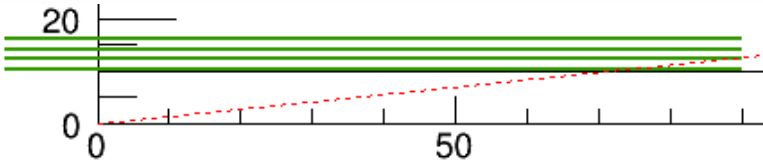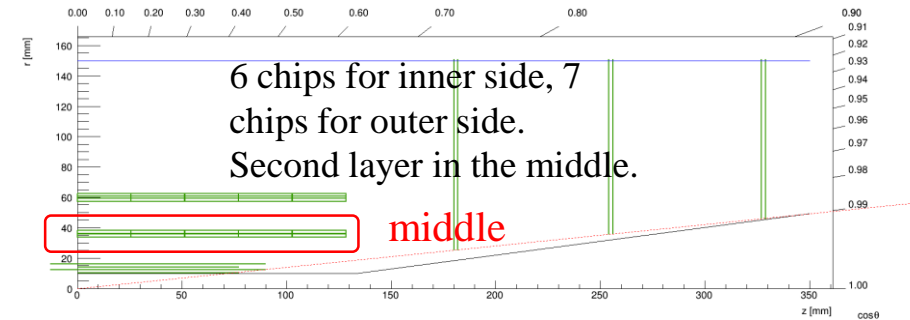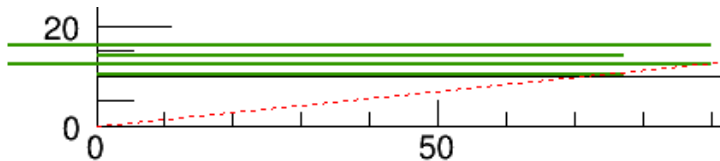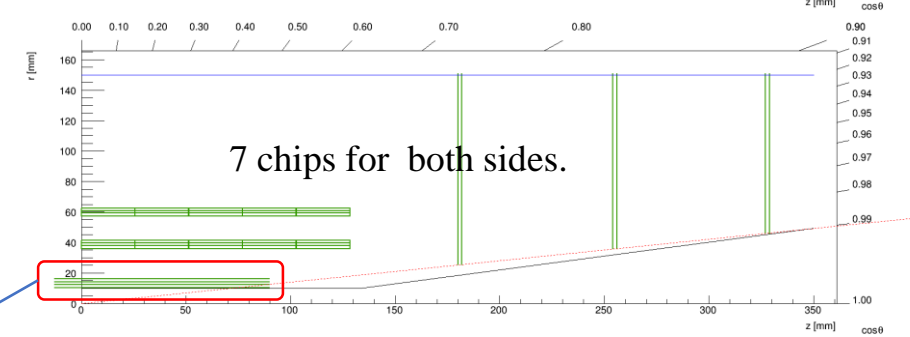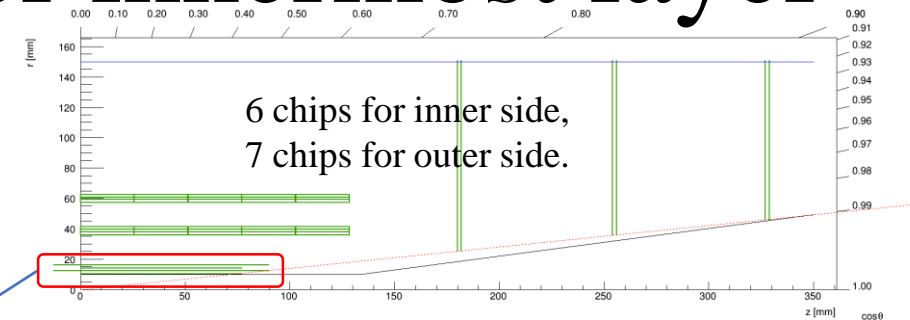

# 7 ladders arrangement for innermost layer

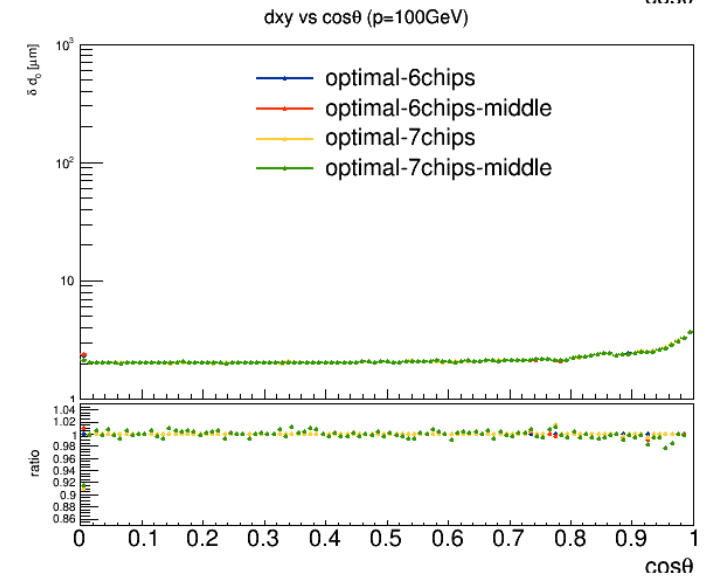
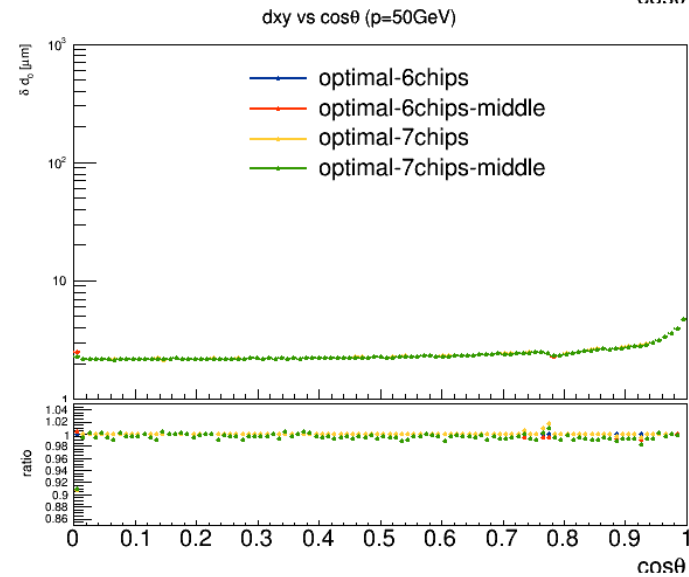
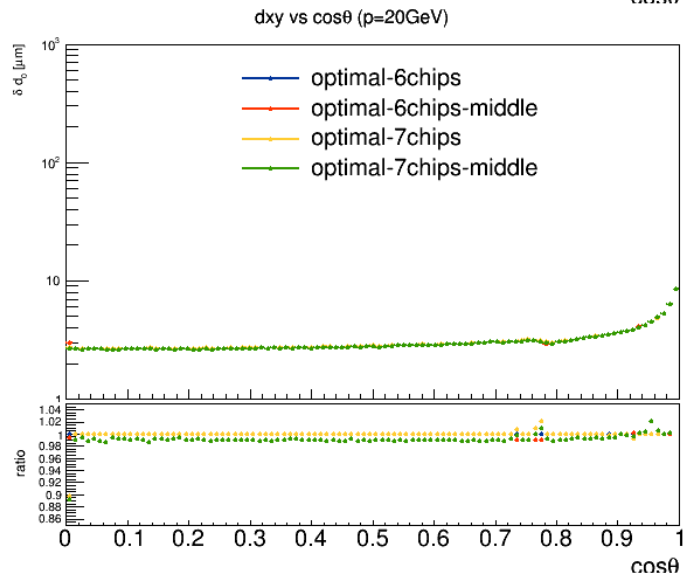
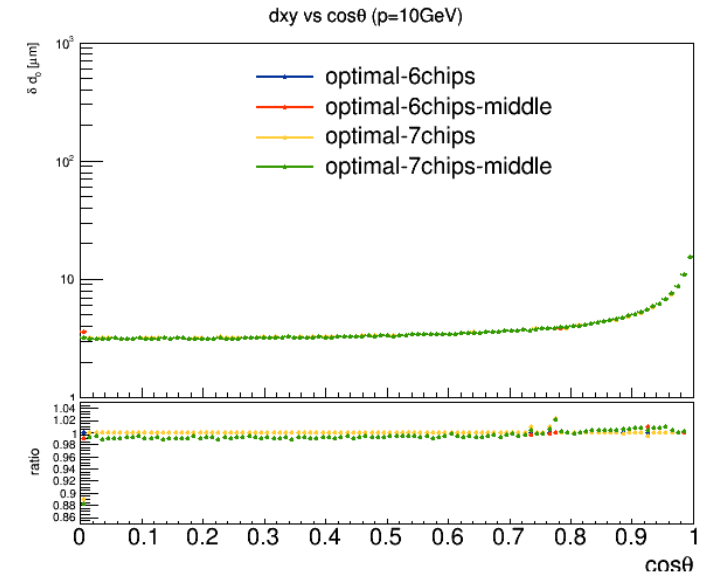
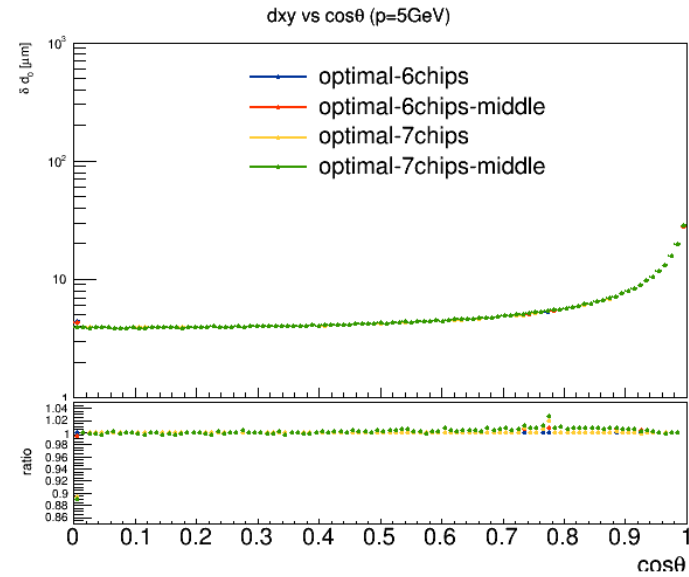
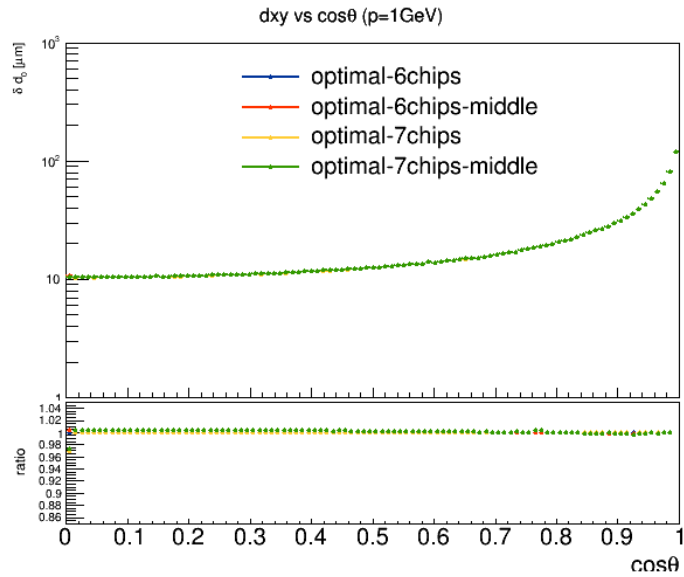


# 8 ladders arrangement for innermost layer

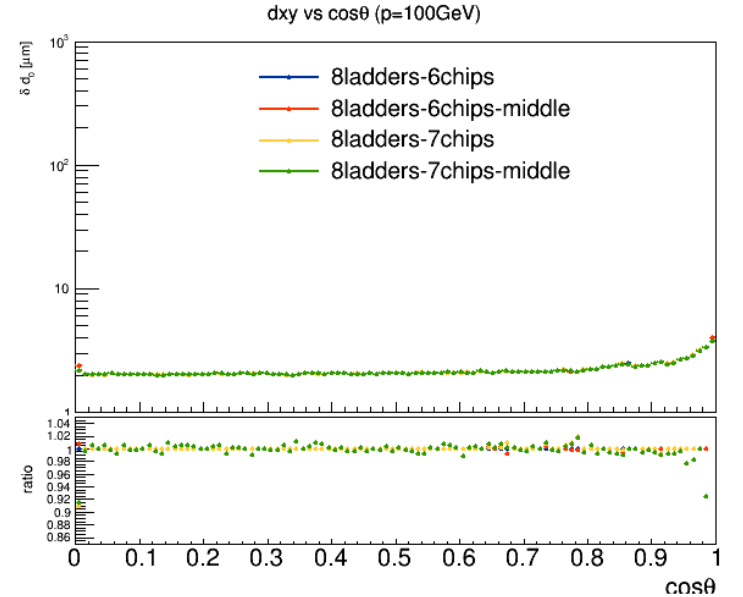
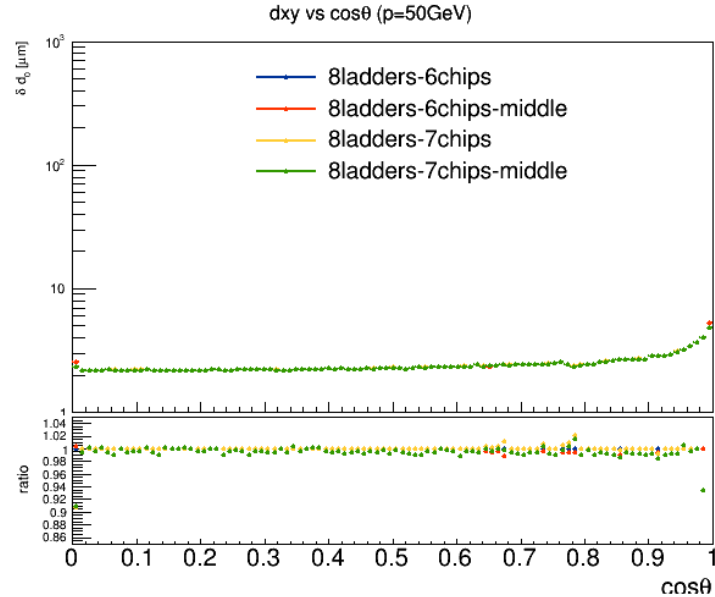
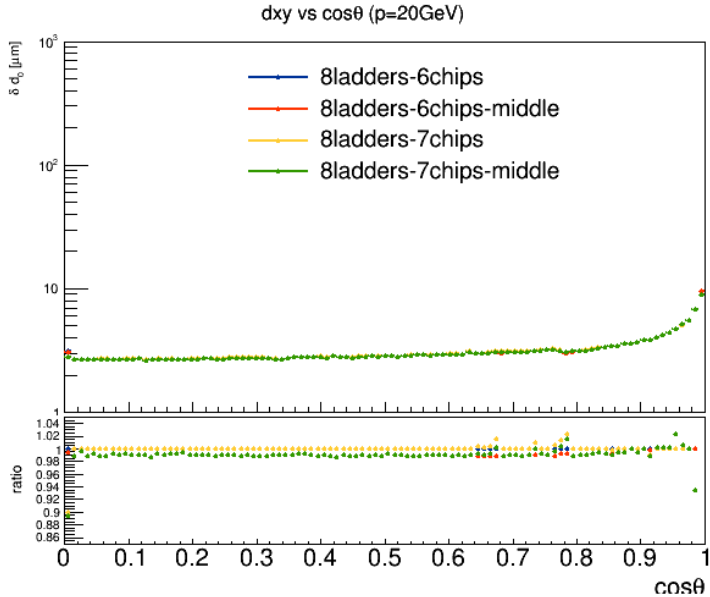
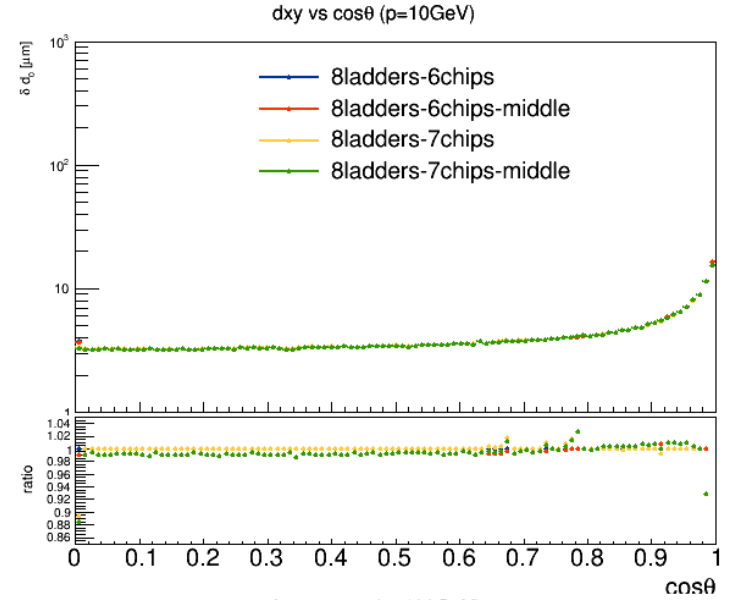
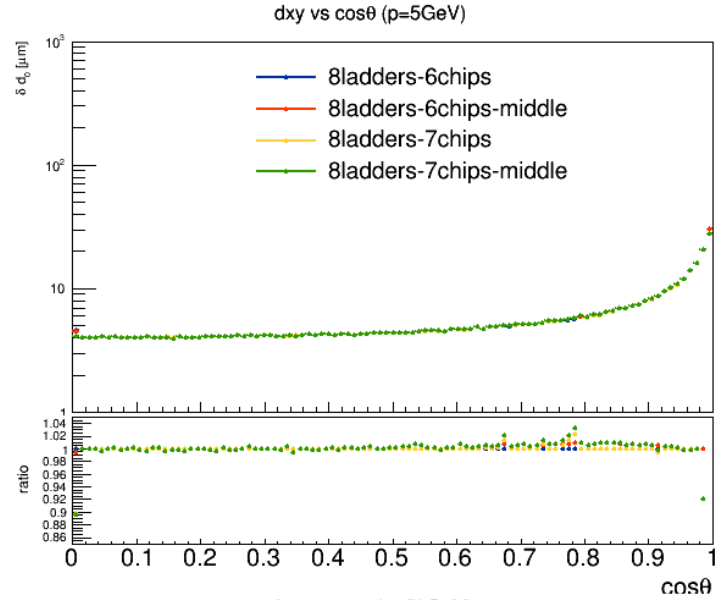
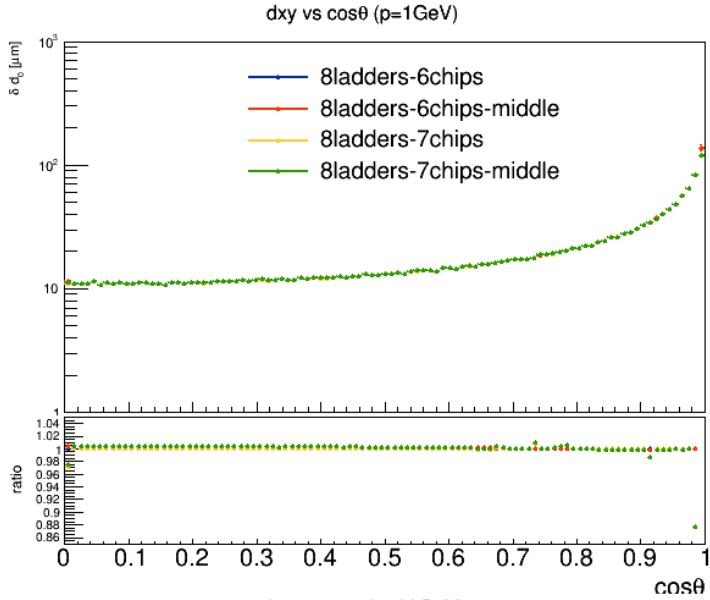










# Comparison of different ladder arrangements for innermost layer

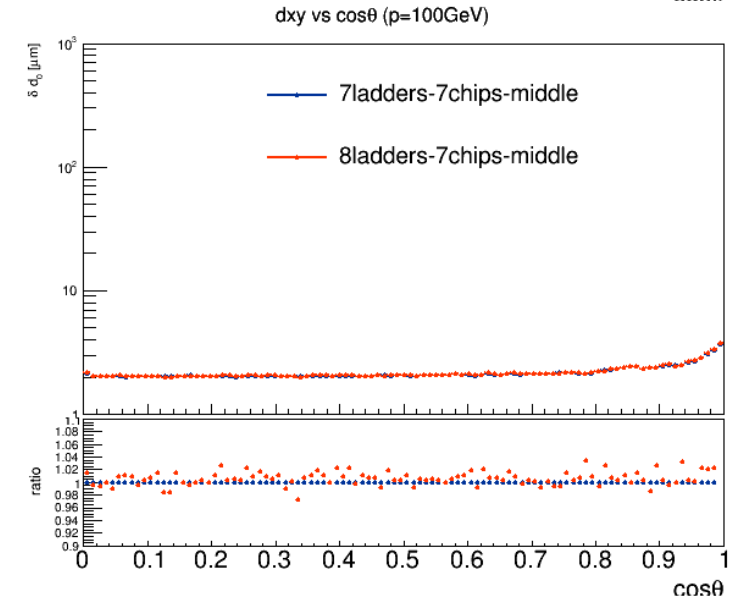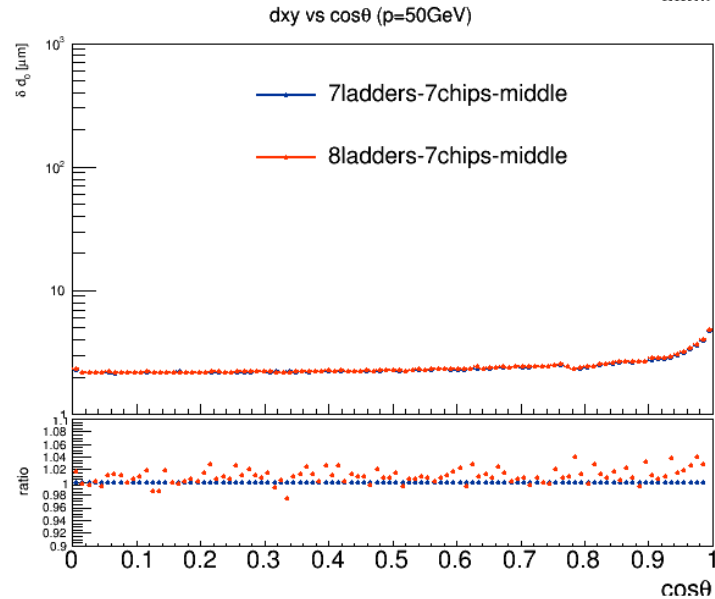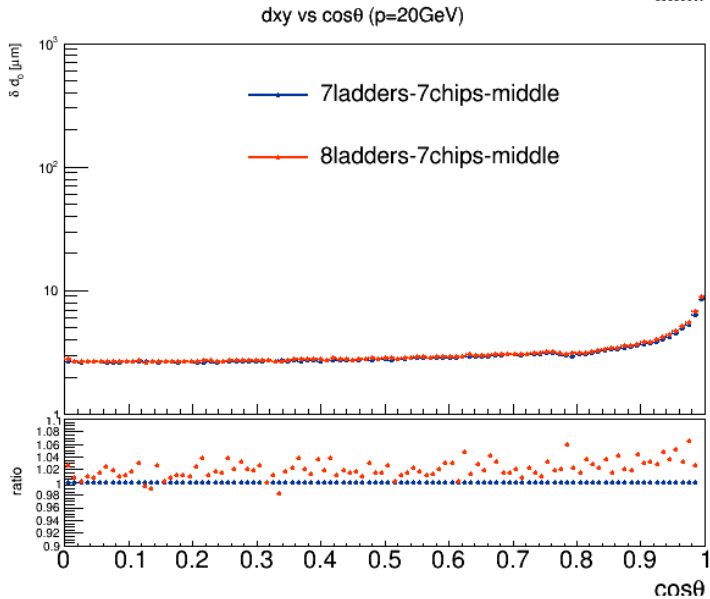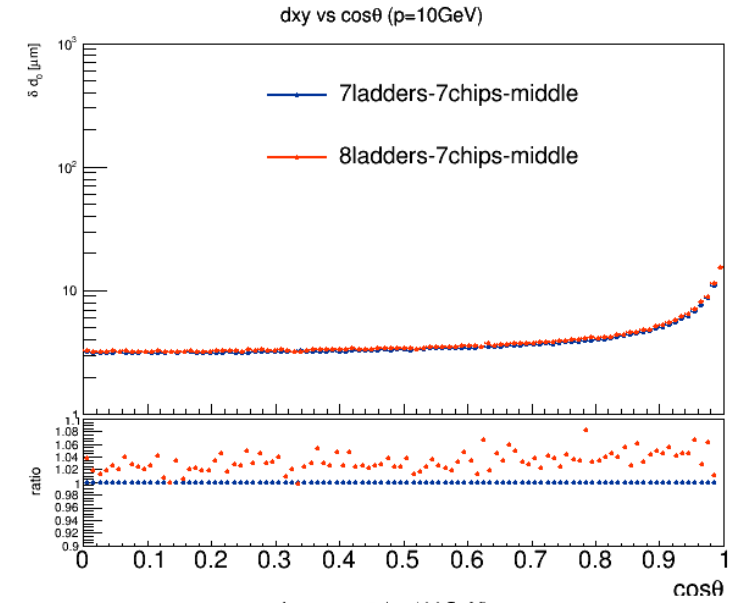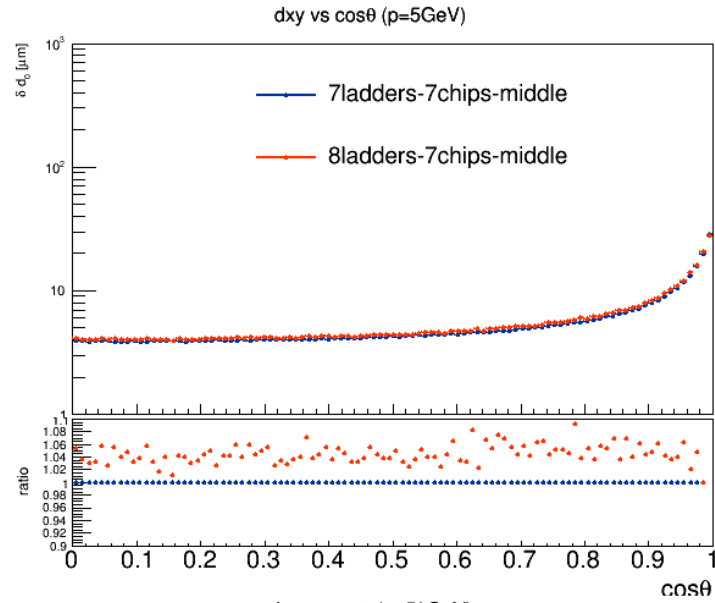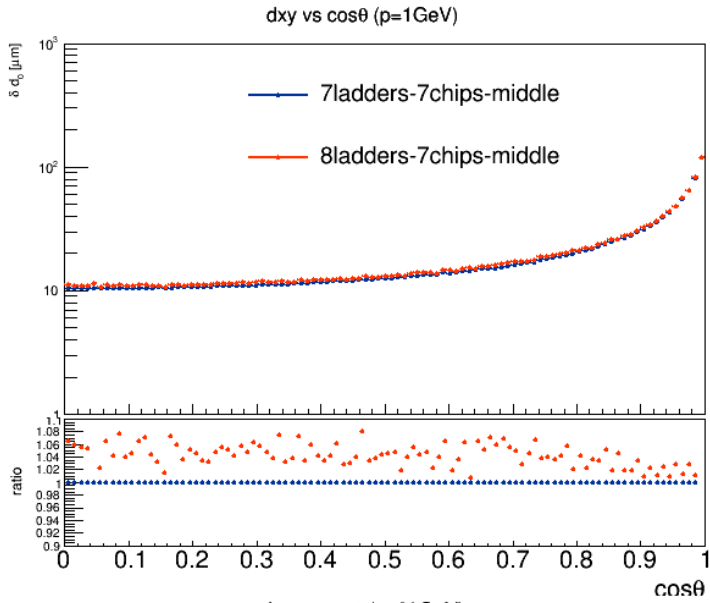







# d0 resolution of optimal vertex layout

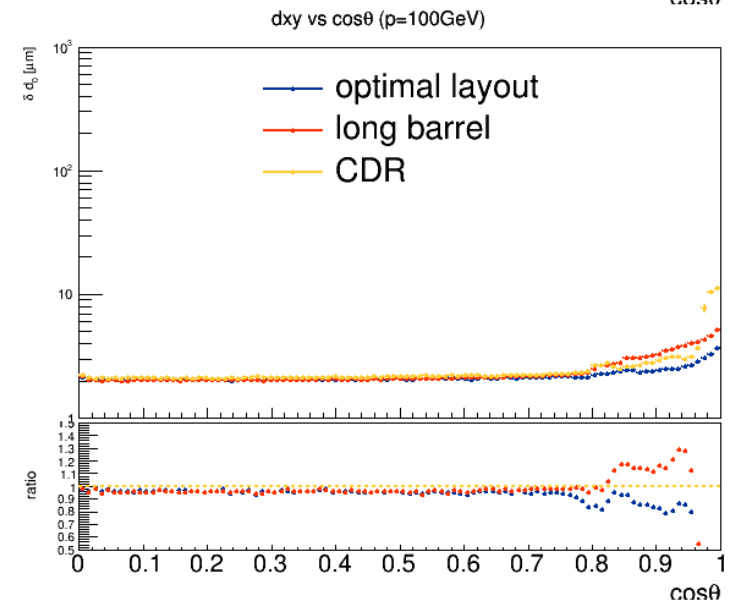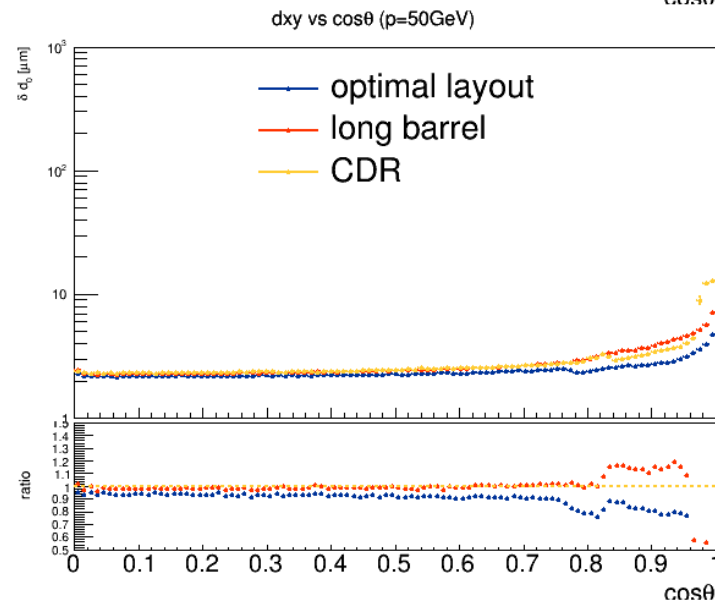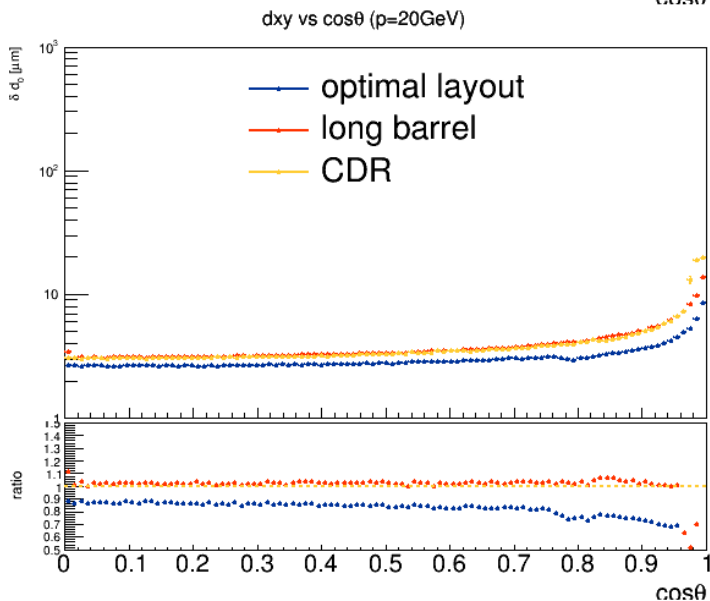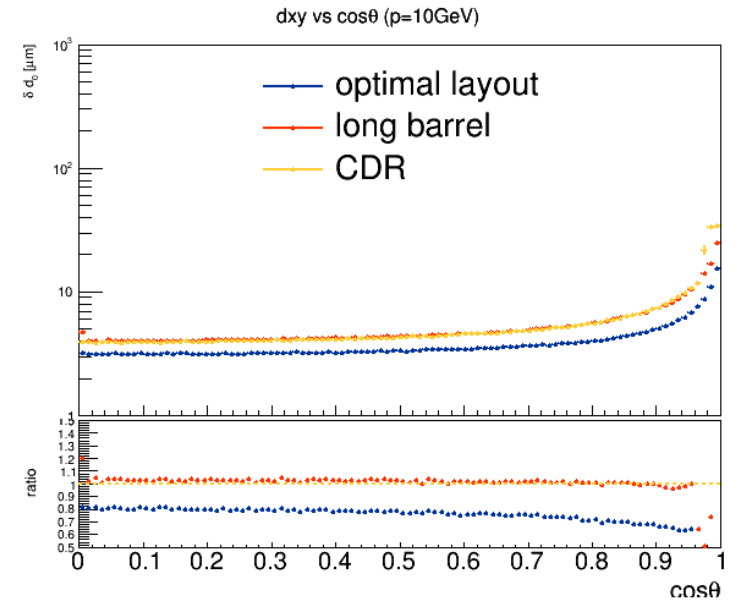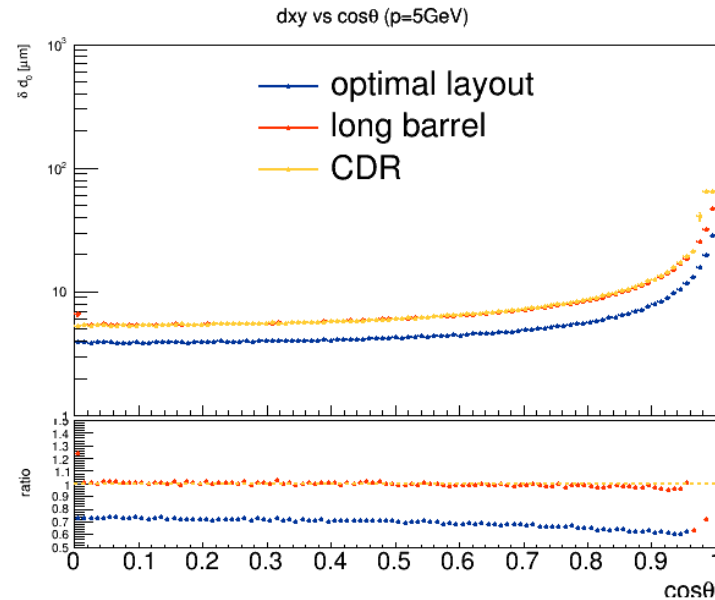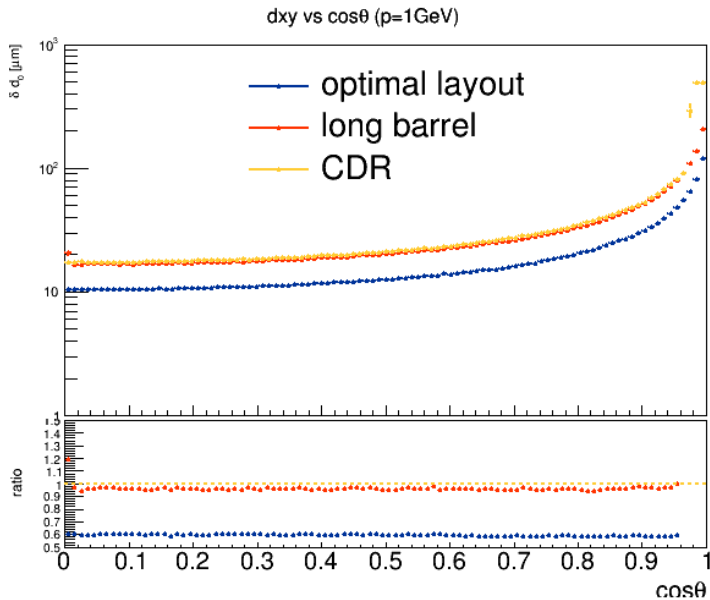

# New long barrel

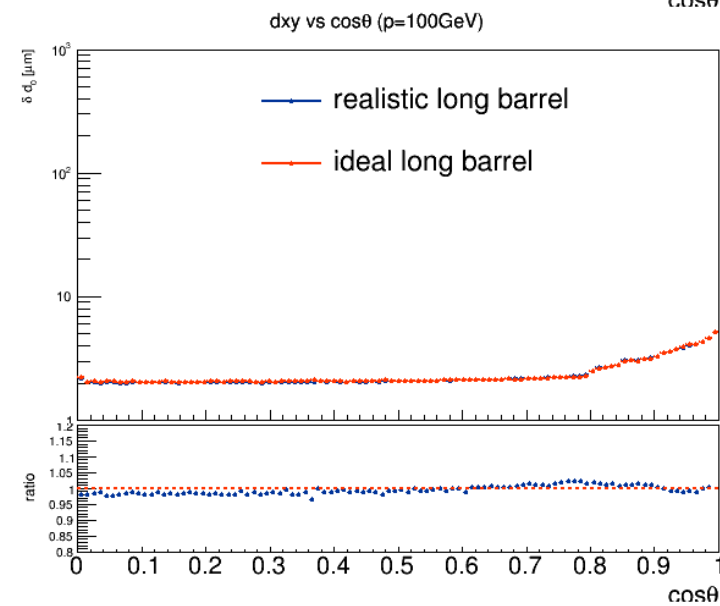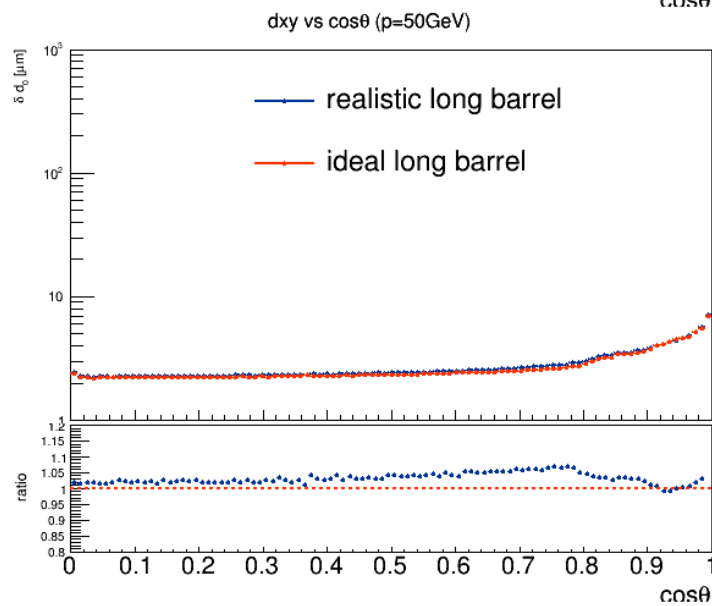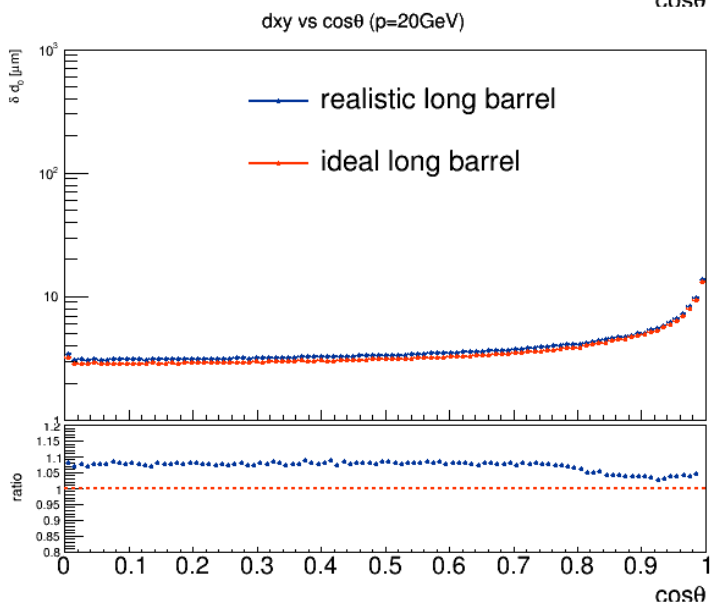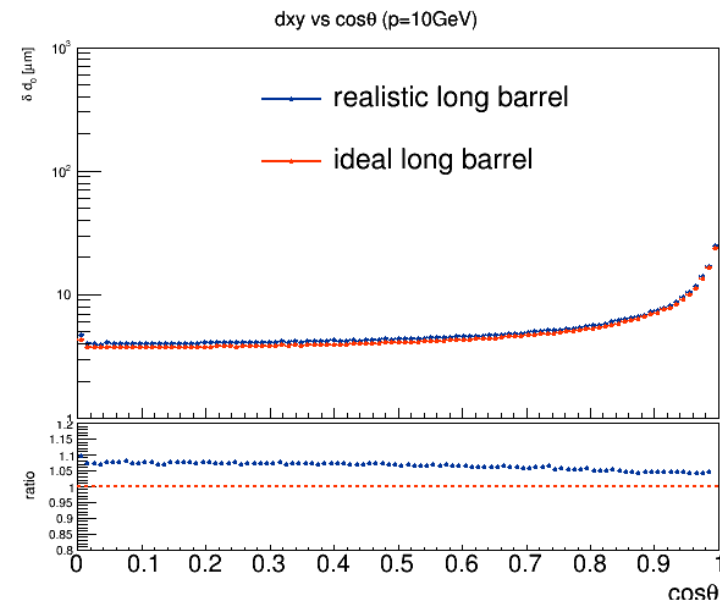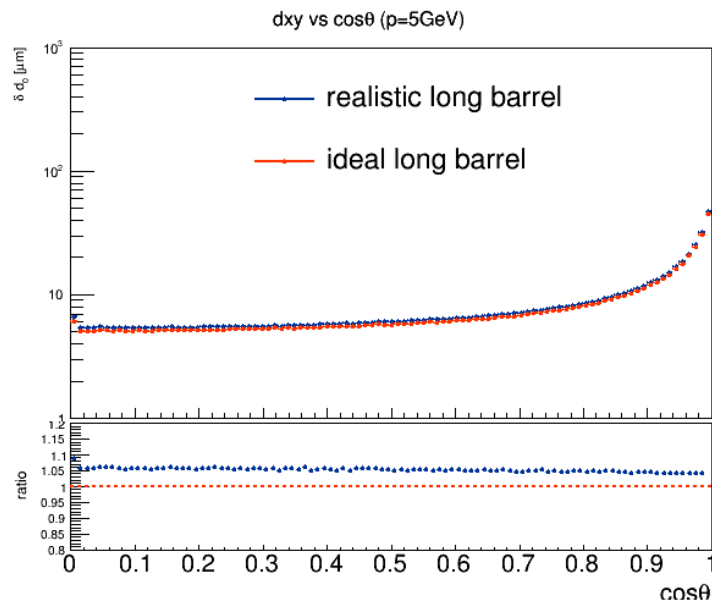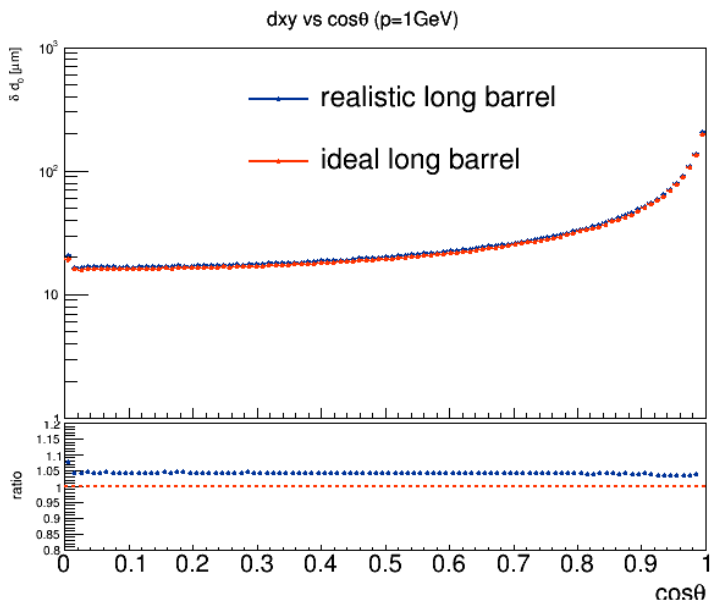

# vertex\_v2 performance

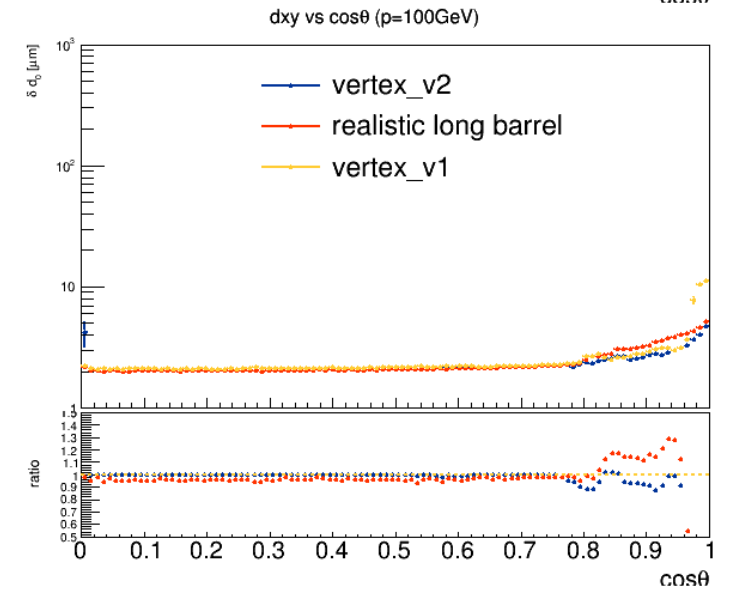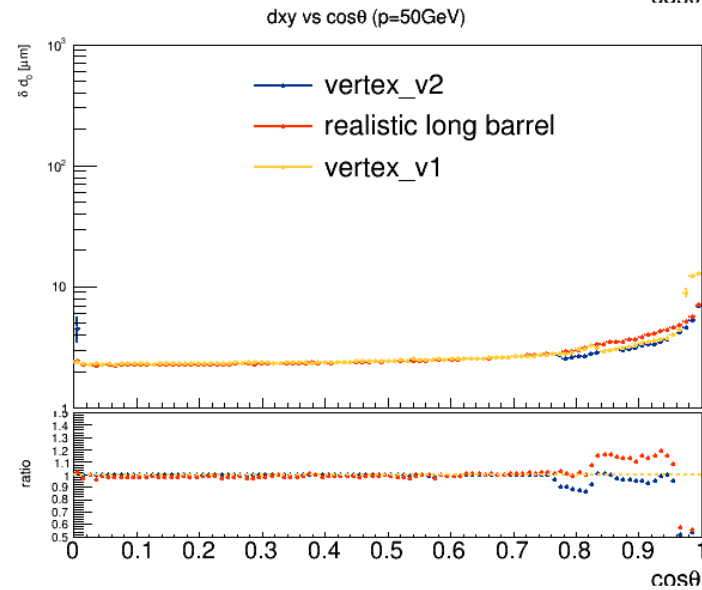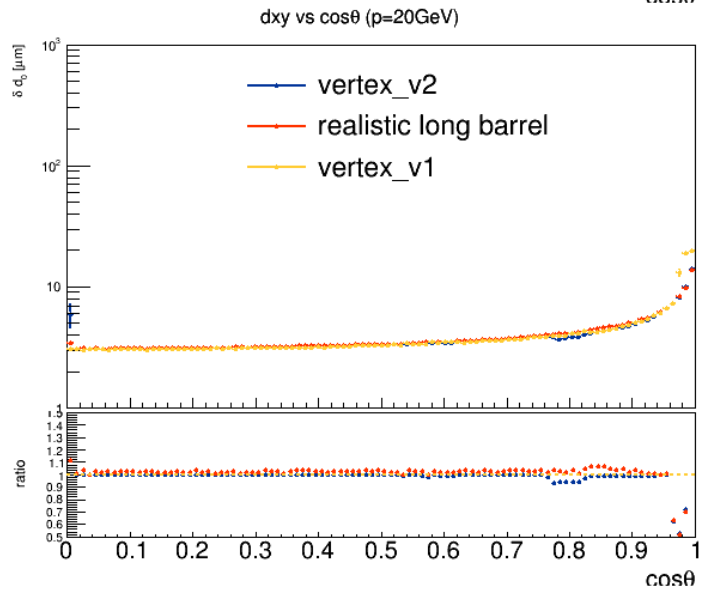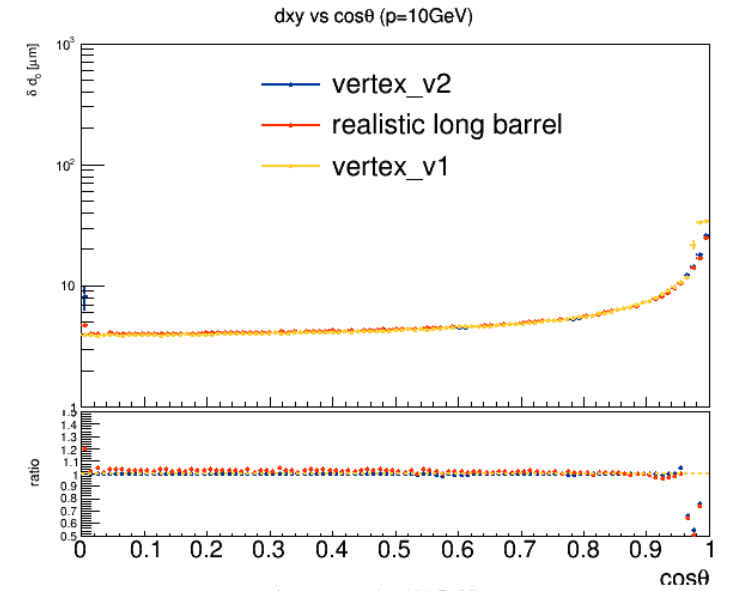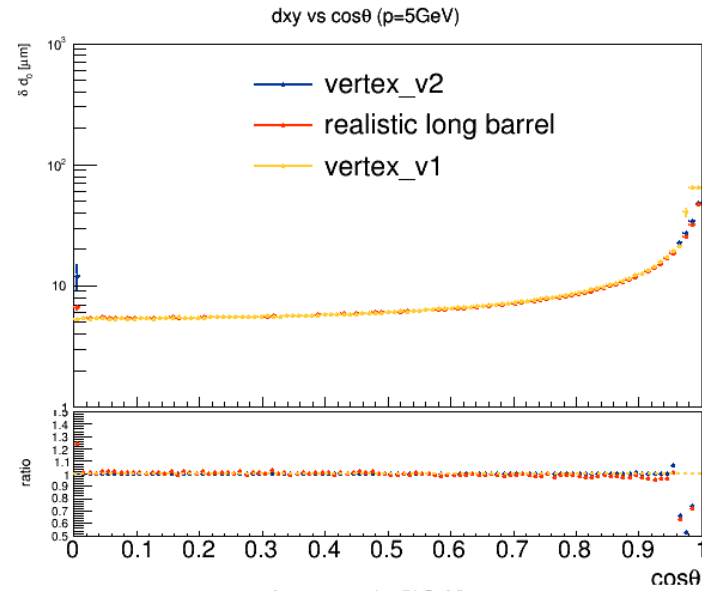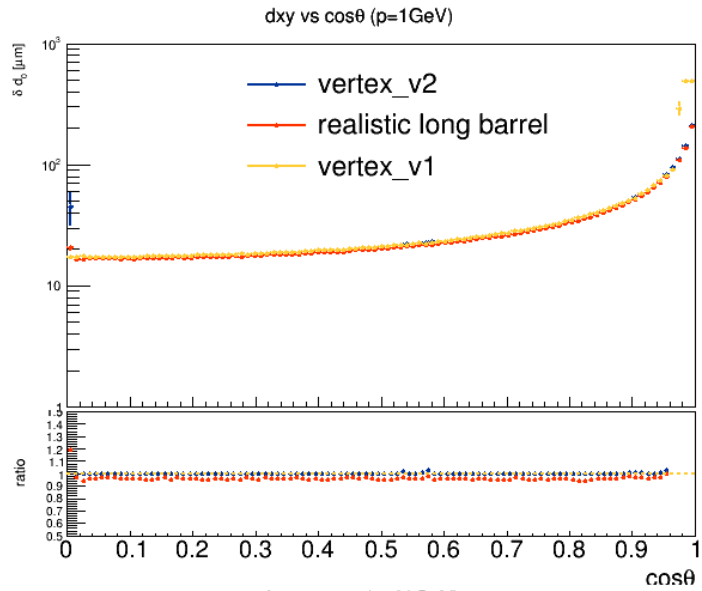

# Ladder of realistic long barrel vertex

detector layers 5-6: width 16.8 mm, high 4 mm

surface thickness: 0.25

inside ribs thickness : 0.6    number: 2 intotal

detector layers 3-4: width 16.8 mm, high 3 mm

surface thickness: 0.2

inside ribs thickness : 0.6    number: 2 intotal

Carbon fiber support:

