



# International Workshop on High Energy Circular Electron Positron Collider





## Muon Detector Options for CEPC

**Liang Li**


**Shanghai Jiao Tong University**

# Muon System Overview

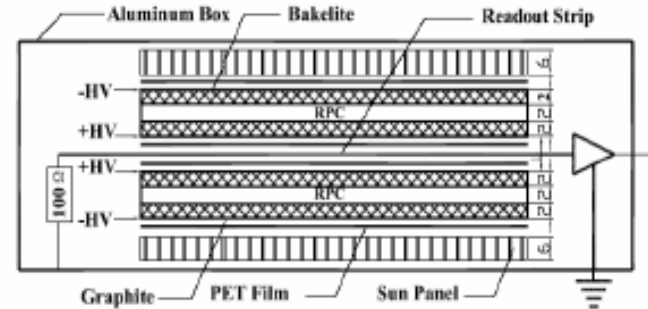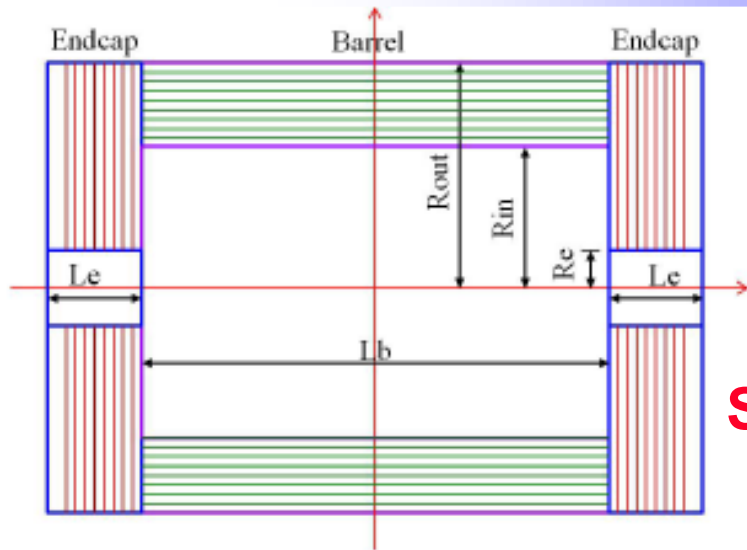

## Structure:

- Between magnet iron yoke, outside HCAL
- Cylindrical barrel & two endcap system
- Solid angle coverage:  $0.98 * 4\pi$

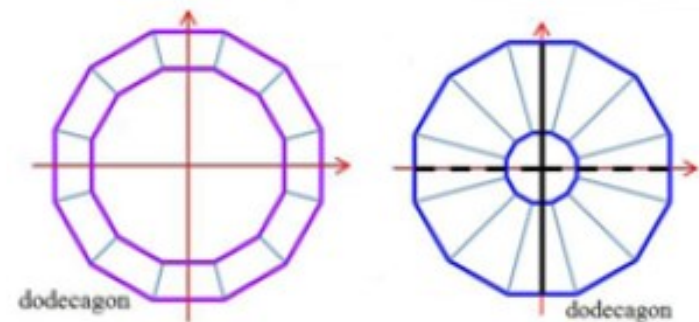

## Technology:

- Bakelite/glass RPC as baseline
- Many other options in consideration
  - $\mu$ RWell
  - Micromegas, GEM
  - MDT, Scintillator Strip

# Baseline Design

# Baseline Design


Parameter	Possible range	Baseline
Lb/2 [m]	3.6 – 5.6	4.0
Rin [m]	3.5 – 5.0	4.4
Rout [m]	5.5 – 7.2	7.0
Le [m]	2.0 – 3.0	2.6
Re [m]	0.6 – 1.0	0.8
Segmentation	8/10/12	12
Number of layers	6 – 10	8
Total thickness of iron	6 – 10 $\lambda$ ( $\lambda = 16.77$ cm)	8 $\lambda$ (136 cm) (8/8/12/12/16/16/20/20/24) cm
Solid angle coverage	$(0.94 - 0.98) \times 4\pi$	0.98
Position resolution [cm]	$\sigma_{r\phi}$ : 1.5 – 2.5	2
	$\sigma_z$ : 1 – 2	1.5
Detection efficiency ( $E_\mu > 5$ GeV)	92% – 99%	95%
Fake( $\pi \rightarrow \mu$ )@30GeV	0.5% – 3%	< 1%
Rate capability [Hz/cm <sup>2</sup> ]	50 – 100	~60
	RPC	RPC (super module, 1
	$\mu$ RWell	layer readout, 2 layers of
	Micromegas	RPC )
	GEM	
	(s)TGC	
	MDT	
Technology	Scintillating strip	
	Barrel	~4450
	Endcap	~4150
Total area [m <sup>2</sup> ]	Total	~8660

# Baseline Design

Parameter	Possible range	Baseline
Lb/2 [m]	3.6 – 5.6	4.0
Rin [m]	3.5 – 5.0	4.4
Rout [m]	5.5 – 7.2	7.0
Le [m]	2.0 – 3.0	2.6
Re [m]	0.6 – 1.0	0.8
Segmentation	8/10/12	12
Number of layers	6 – 10	8
Total thickness of iron	6 – 10 $\lambda$ ( $\lambda = 16.77$ cm)	8 $\lambda$ (136 cm) (8/8/12/12/16/16/20/20/24) cm
Solid angle coverage	(0.94 – 0.98) $\times 4\pi$	0.98
Position resolution [cm]	$\sigma_{r\phi}$ : 1.5 – 2.5 $\sigma_z$ : 1 – 2	2 1.5
Detection efficiency ( $E_\mu > 5$ GeV)	92% – 99%	95%
Fake( $\pi \rightarrow \mu$ )@30GeV	0.5% – 3%	< 1%
Rate capability [Hz/cm <sup>2</sup> ]	50 – 100	~60
Technology	RPC	RPC (super module, 1
	$\mu$ RWell	layer readout, 2 layers of
	Micromegas	RPC )
	GEM	
	(s)TGC	
	MDT	
	Scintillating strip	
Total area [m <sup>2</sup> ]	Barrel	~4450
	Endcap	~4150
	Total	~8660

## Resistive Plate Chamber (RPC)

Parameters		Bakelite	Glass
Bulk resistivity [ $\Omega \cdot \text{cm}$ ]	Normal	$10^{10} \sim 10^{12}$	$> 10^{12}$
	Developing		$10^8 \sim 10^9$
Max unit size (2 mm thick) [m]		1.2 $\times$ 2.4	1.0 $\times$ 1.2
Surface flatness [nm]		< 500	< 100
Density [g/cm <sup>3</sup> ]		1.36	2.4 ~ 2.8
Min board thickness [mm]		1.0	0.2
Mechanical performance		Tough	Fragile
Rate capability [Hz/cm <sup>2</sup> ]	Streamer	100@92% [97]	
	Avalanche	10K	100@95% [98]
Noise rate [Hz/cm <sup>2</sup> ]	Streamer	< 0.8	0.05 [99]

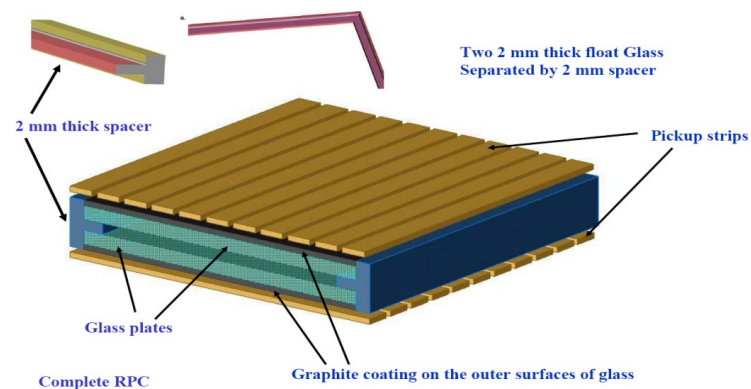


# Baseline Design

Parameter	Possible range	Baseline
Lb/2 [m]	3.6 – 5.6	4.0
Rin [m]	3.5 – 5.0	4.4
Rout [m]	5.5 – 7.2	7.0
Le [m]	2.0 – 3.0	2.6
Re [m]	0.6 – 1.0	0.8
Segmentation	8/10/12	12
Number of layers	6 – 10	8
Total thickness of iron	6 – 10 $\lambda$ ( $\lambda = 16.77$ cm)	8 $\lambda$ (136 cm) (8/8/12/12/16/16/20/20/24) cm
Solid angle coverage	(0.94 – 0.98) $\times 4\pi$	0.98
Position resolution [cm]	$\sigma_{r\phi}$ : 1.5 – 2.5 $\sigma_z$ : 1 – 2	2 1.5
Detection efficiency ( $E_\mu > 5$ GeV)	92% – 99%	95%
Fake( $\pi \rightarrow \mu$ )@30GeV	0.5% – 3%	< 1%
Rate capability [Hz/cm <sup>2</sup> ]	50 – 100	~60
Technology	RPC $\mu$ RWell Micromegas GEM (s)TGC MDT Scintillating strip	RPC (super module, 1 layer readout, 2 layers of RPC )
Total area [m <sup>2</sup> ]	Barrel Endcap Total	~4450 ~4150 ~8660

## Resistive Plate Chamber (RPC)

Parameters	Bakelite	Glass
Bulk resistivity [ $\Omega \cdot \text{cm}$ ]	Normal Developing	$10^{10} \sim 10^{12}$ $10^8 \sim 10^9$
Max unit size (2 mm thick) [m]	1.2 $\times$ 2.4	1.0 $\times$ 1.2
Surface flatness [nm]	< 500	< 100
Density [g/cm <sup>3</sup> ]	1.36	2.4 ~ 2.8
Min board thickness [mm]	1.0	0.2
Mechanical performance	Tough	Fragile
Rate capability [Hz/cm <sup>2</sup> ]	Streamer Avalanche	100@92% [97] 10K 100@95% [98]
Noise rate [Hz/cm <sup>2</sup> ]	Streamer	< 0.8 0.05 [99]

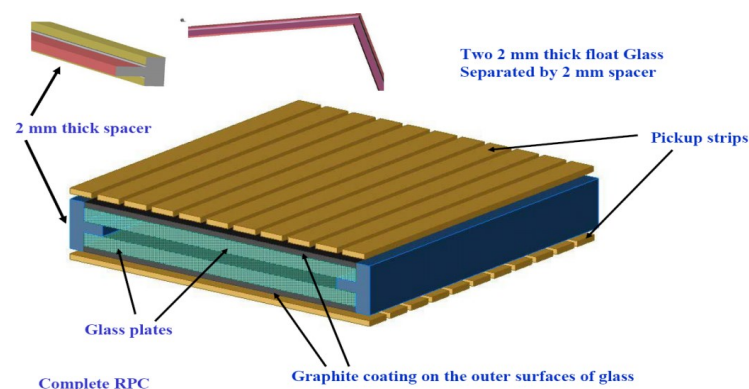

**Signal efficiency > 95% for  
muon  $p_T > 4$  GeV with 8 layers**

- ✓ **Low cost, easy construction**
- ✓ **Position resolution: 5-10 mm**
- ✓ **Time resolution: ~ 1 ns**

# Other Options


# Other Options



Drift cathode PCB

## Micro-RWell technology

- **MPGD with two PCBs: a standard GEM Drift cathode PCB and a  $\mu$ RWell PCB**
- **Amplification stage couples directly with readout: low/high rate option**


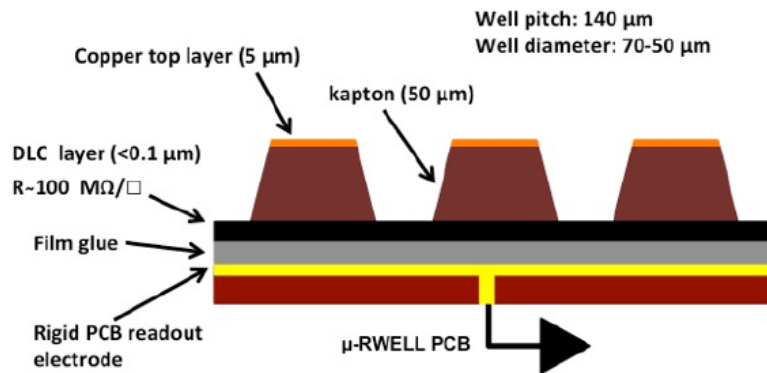




# Other Options

## Micro-RWell technology




- **MPGD with two PCBs: a standard GEM Drift cathode PCB and a  $\mu$ RWell PCB**
- **Amplification stage couples directly with readout: low/high rate option**

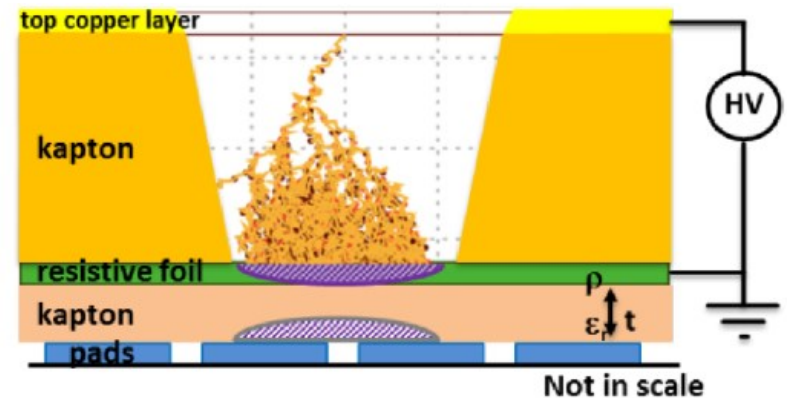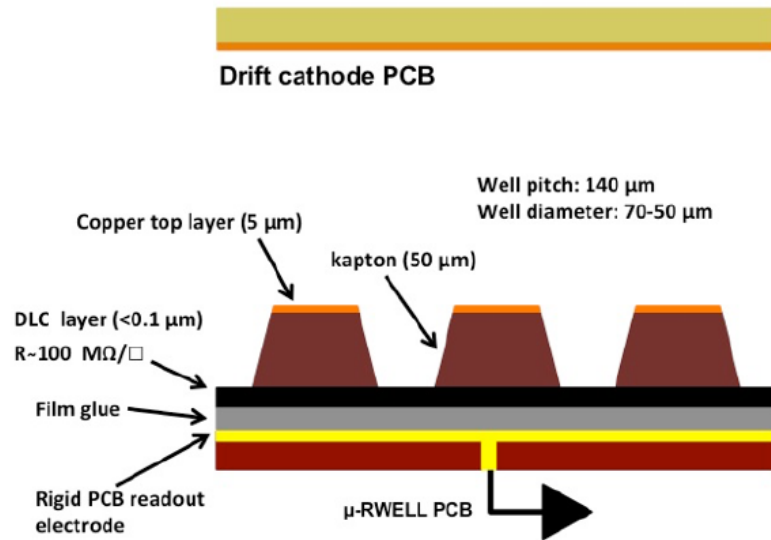

# Other Options

## Micro-RWell technology

- MPGD with two PCBs: a standard GEM Drift cathode PCB and a  $\mu$ RWell PCB
- Amplification stage couples directly with readout: low/high rate option

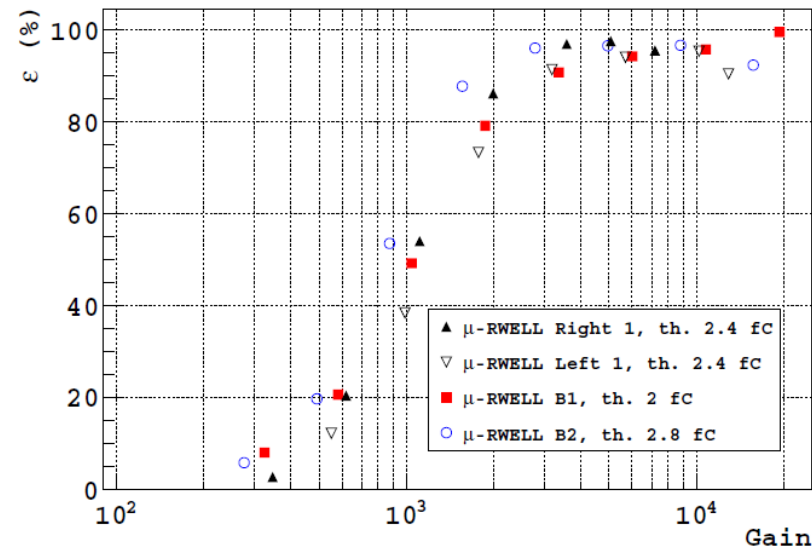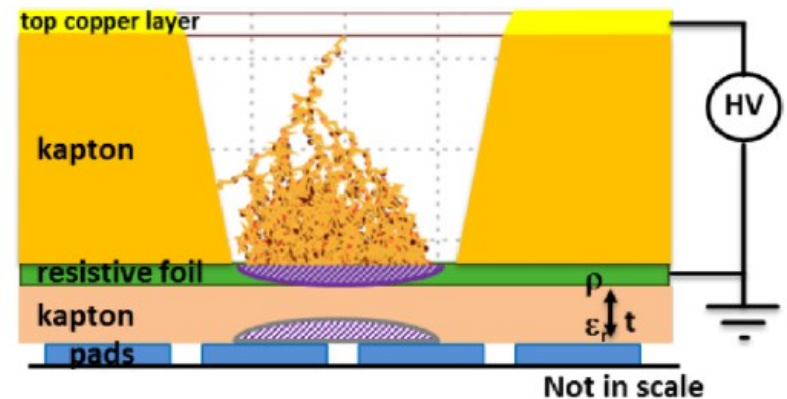
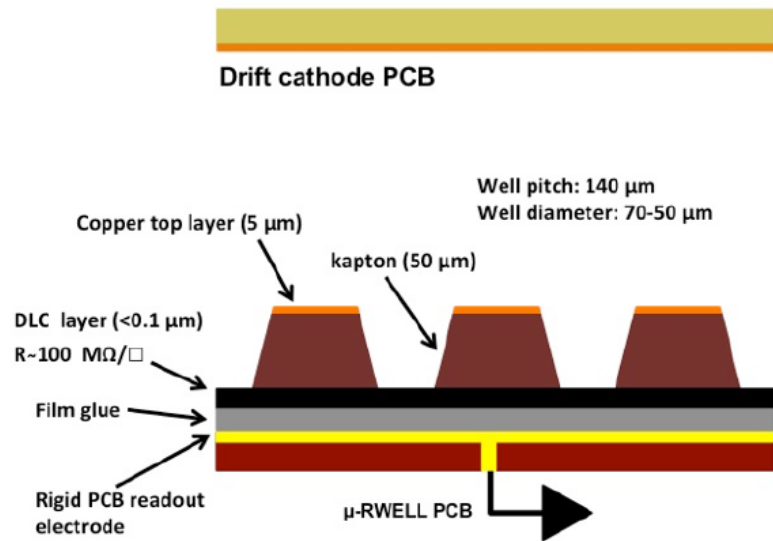


- ✓ Much simpler than many other MPGDs, such as GEMs or MicroMegs
- ✓ Rate capability: a few tens of KHz/cm<sup>2</sup>
- ✓ Position resolution: ~60  $\mu\text{m}$
- ✓ Time resolution: 5-6 ns


# Other Options

## Micro-RWell technology

- MPGD with two PCBs: a standard GEM Drift cathode PCB and a  $\mu$ RWell PCB
- Amplification stage couples directly with readout: low/high rate option

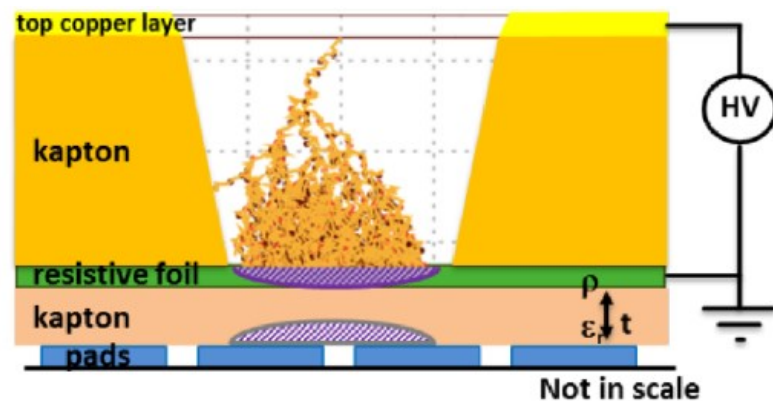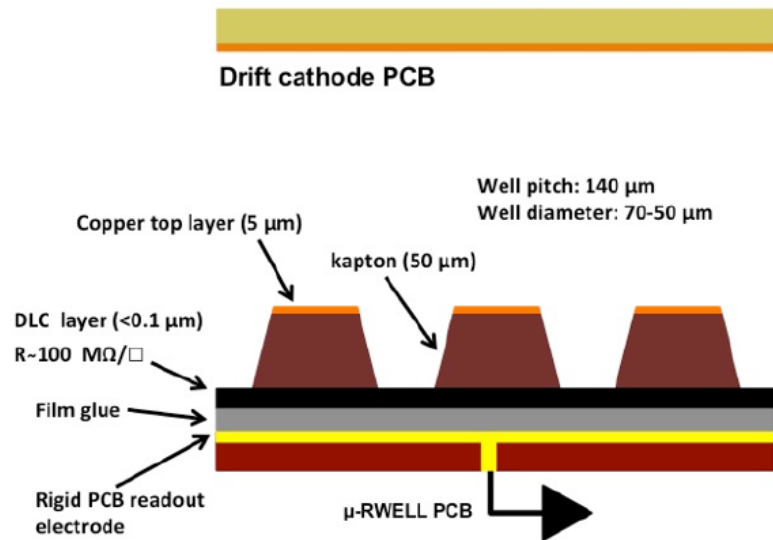

- ✓ Much simpler than many other MPGDs, such as GEMs or MicroMegas
- ✓ Rate capability: a few tens of  $\text{KHz}/\text{cm}^2$
- ✓ Position resolution:  $\sim 60 \mu\text{m}$
- ✓ Time resolution: 5-6 ns


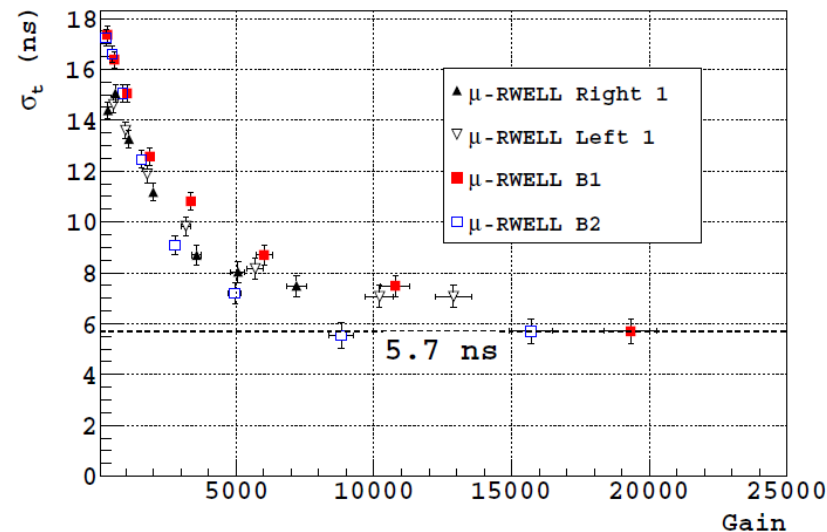


# Other Options

# Other Options

## Micro Mesh Gaseous Structure (Micromegas)

A planar drift electrode, a gas gap of a few millimeters thickness as conversion and drift region, and a thin metallic mesh typically 100–150  $\mu\text{m}$  distance from the readout electrode as the amplification region.

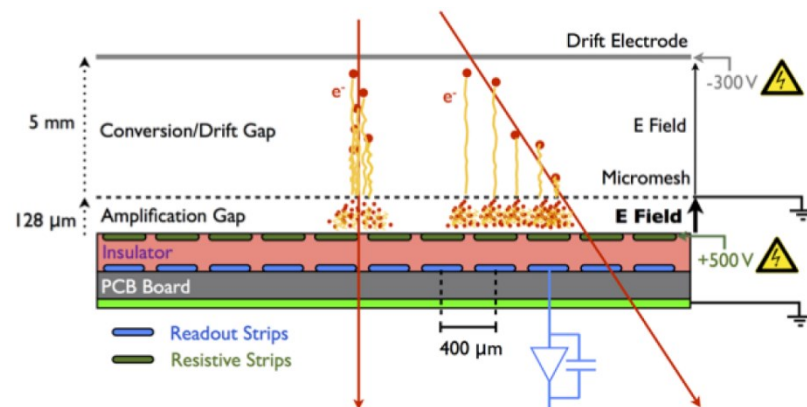
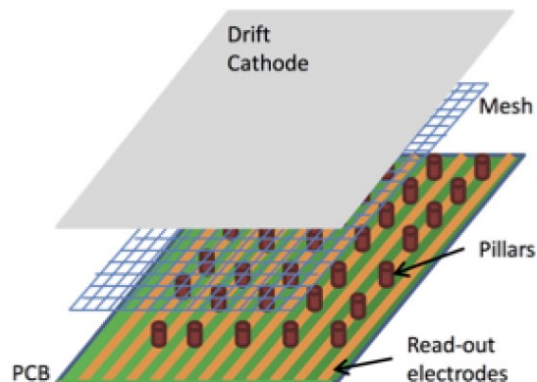


# Other Options

## Micro Mesh Gaseous Structure (Micromegas)

A planar drift electrode, a gas gap of a few millimeters thickness as conversion and drift region, and a thin metallic mesh typically 100–150  $\mu\text{m}$  distance from the readout electrode as the amplification region.

- Good spatial resolution  $< 100 \mu\text{m}$ , time resolution  $\sim 10\text{ns}$

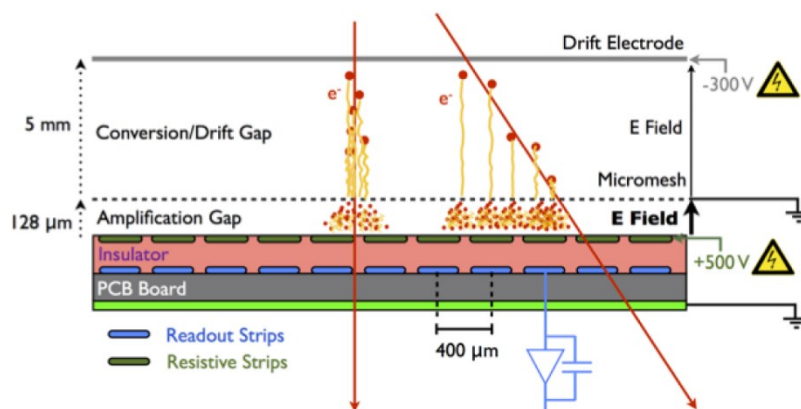
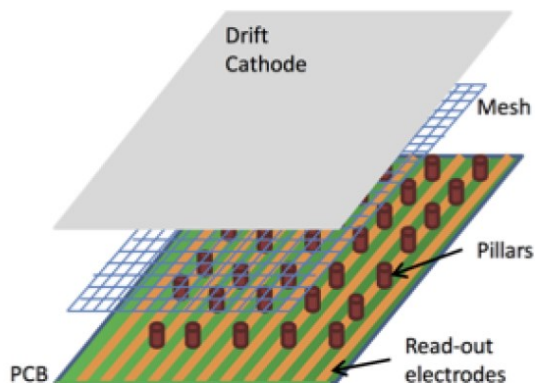


# Other Options

## Micro Mesh Gaseous Structure (Micromegas)

A planar drift electrode, a gas gap of a few millimeters thickness as conversion and drift region, and a thin metallic mesh typically 100–150  $\mu\text{m}$  distance from the readout electrode as the amplification region.

- Good spatial resolution  $< 100 \mu\text{m}$ , time resolution  $\sim 10\text{ns}$
- High rate capability:  $\sim 10\text{MHz}/\text{cm}^2$

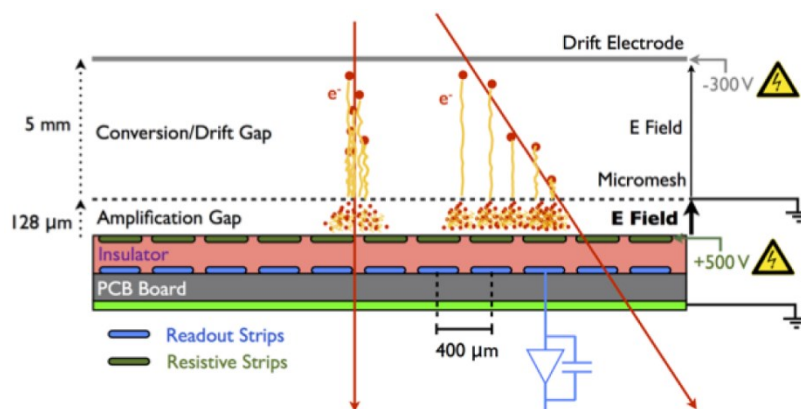
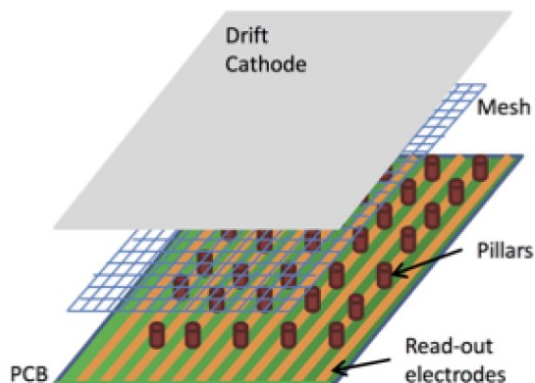


# Other Options

## Micro Mesh Gaseous Structure (Micromegas)

A planar drift electrode, a gas gap of a few millimeters thickness as conversion and drift region, and a thin metallic mesh typically 100–150  $\mu\text{m}$  distance from the readout electrode as the amplification region.

- Good spatial resolution  $< 100 \mu\text{m}$ , time resolution  $\sim 10\text{ns}$
- High rate capability:  $\sim 10\text{MHz}/\text{cm}^2$
- Vulnerability to sparking

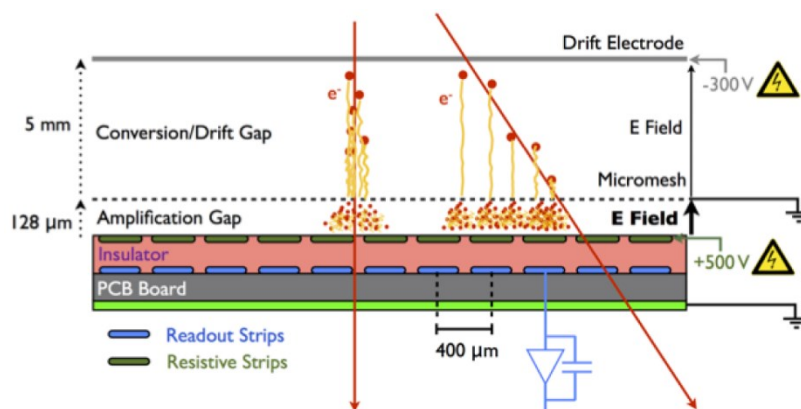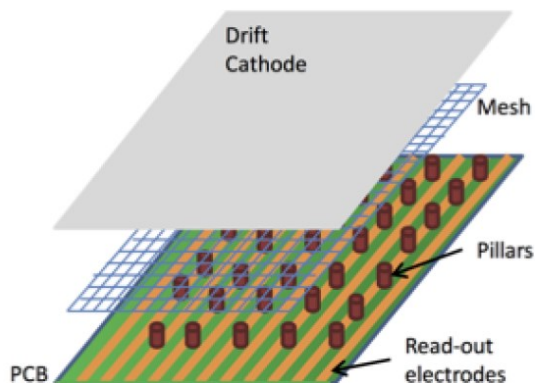





# Other Options

## Micro Mesh Gaseous Structure (Micromegas)

A planar drift electrode, a gas gap of a few millimeters thickness as conversion and drift region, and a thin metallic mesh typically 100–150  $\mu\text{m}$  distance from the readout electrode as the amplification region.



- Good spatial resolution  $< 100 \mu\text{m}$ , time resolution  $\sim 10\text{ns}$
- High rate capability:  $\sim 10\text{MHz}/\text{cm}^2$
- Vulnerability to sparking
- Large active area ( $10^4\text{m}^2$ ) Micromegas still under development

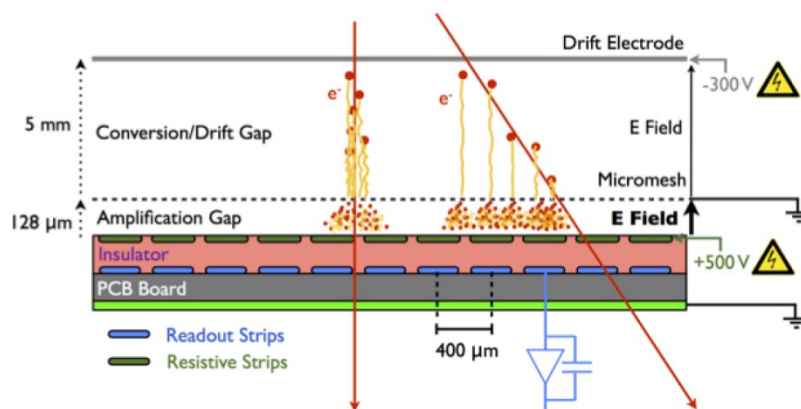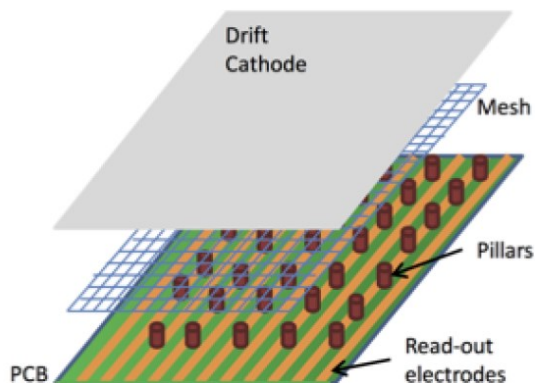

# Other Options

## Gas Electron Multiplier (GEM) technology

- Gaseous ionization detector using copper-clad Kapton foil (50-70  $\mu\text{m}$  thick) with etched holes (30-50  $\mu\text{m}$  diameter) for gas amplification.
- Very good spatial resolution  $\sim$  diameter, time resolution  $\sim 10\text{-}20\text{ns}$
- High rate capability:  $\sim 10\text{MHz/cm}^2$
- Vulnerability to sparking
- Complexity of assembly procedure: stretching and gluing GEM foils

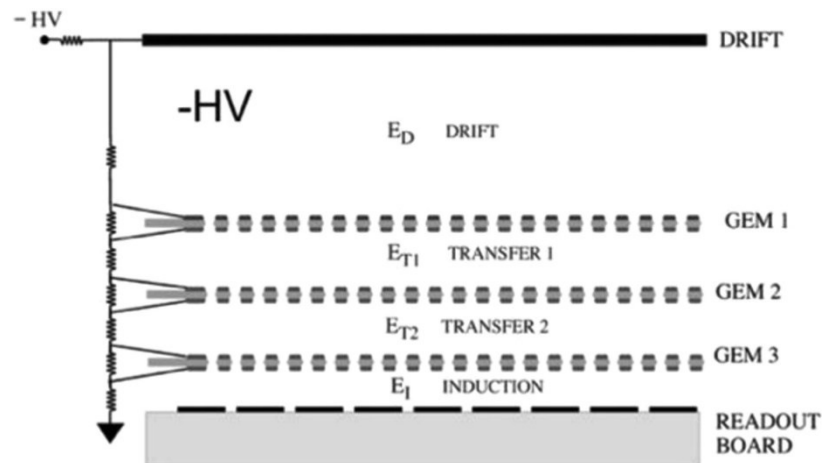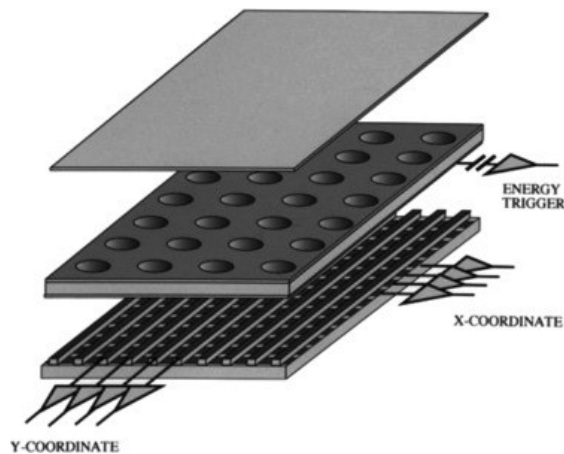

# Other Options

# Other Options

# Other Options

## Monitored Drift Tube (MDT) technology

- Wire chamber: an anode wire at center of tube and a metallic cathode (aluminum) with gas in between
- Good spatial resolution  $\sim 80\mu\text{m}$  , good time resolution  $\sim 10\text{ns}$
- Rate capability:  $\sim 500\text{Hz}/\text{cm}^2$

# Other Options

## Monitored Drift Tube (MDT) technology


- Wire chamber: an anode wire at center of tube and a metallic cathode (aluminum) with gas in between
- Good spatial resolution  $\sim 80\mu\text{m}$  , good time resolution  $\sim 10\text{ns}$
- Rate capability:  $\sim 500\text{Hz}/\text{cm}^2$

## Scintillator Strips technology

- Plastic scintillator material can be extruded into strips longer than 5 m. Use wave-length shifting (WLS) fibers to shift the light spectrum to match the response of Si photo-diodes (SiPM) or multi pixel photo counters (MPPC)
- Construct compact and rigid modules with 1-D or 2D readout strip arrays
- Spatial resolution  $\sim 3\text{ cm}$ , time resolution  $< 1\text{ ns}$
- Extrusion techniques with massive production required



# Muon ID Performance: PFA Calorimeter

# Muon ID Performance: PFA Calorimeter

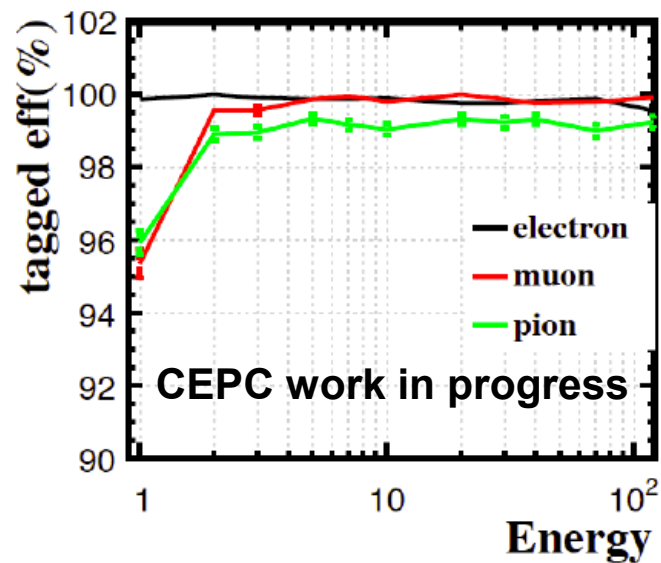





# Muon ID Performance: PFA Calorimeter

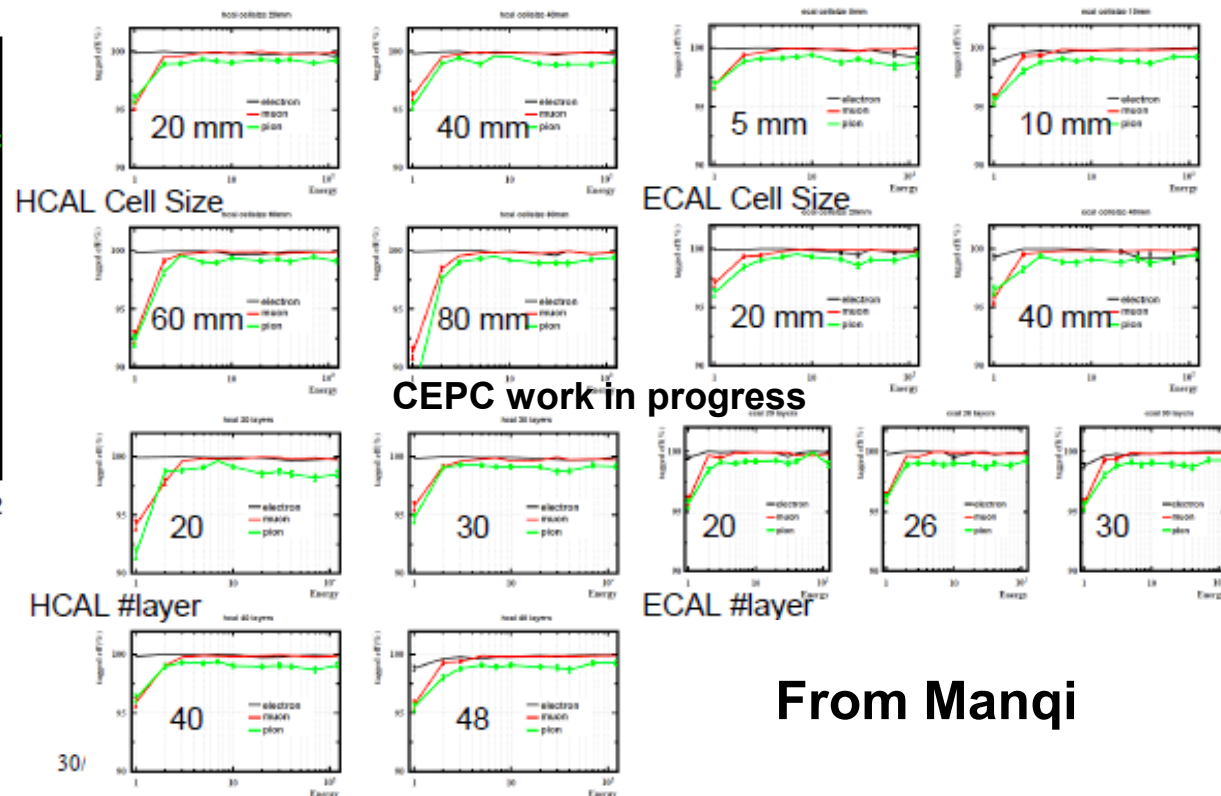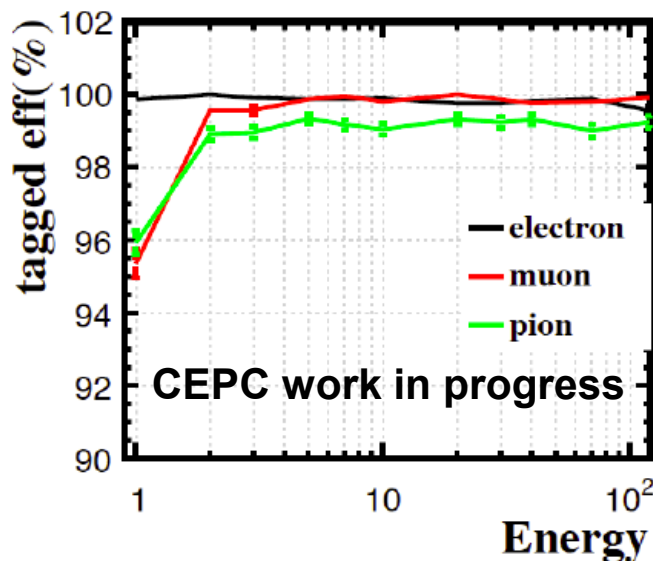

From Manqi

# Muon ID Performance: PFA Calorimeter

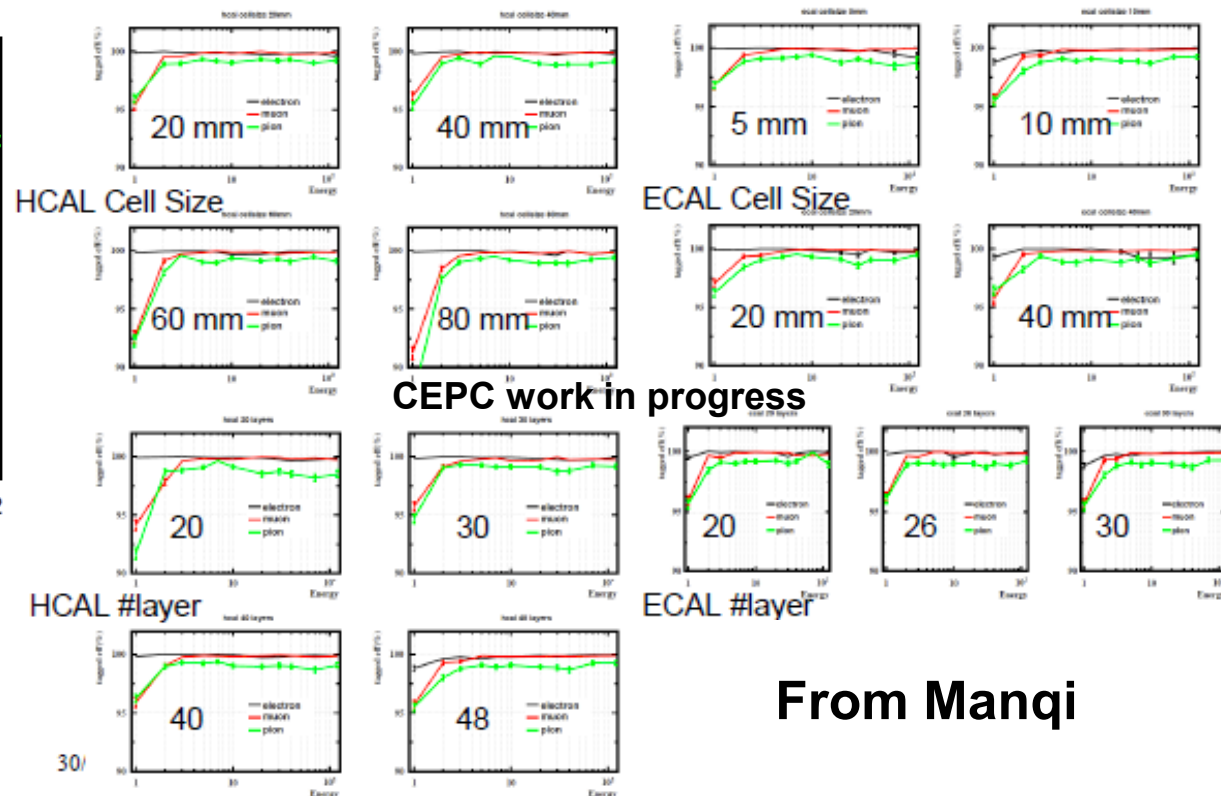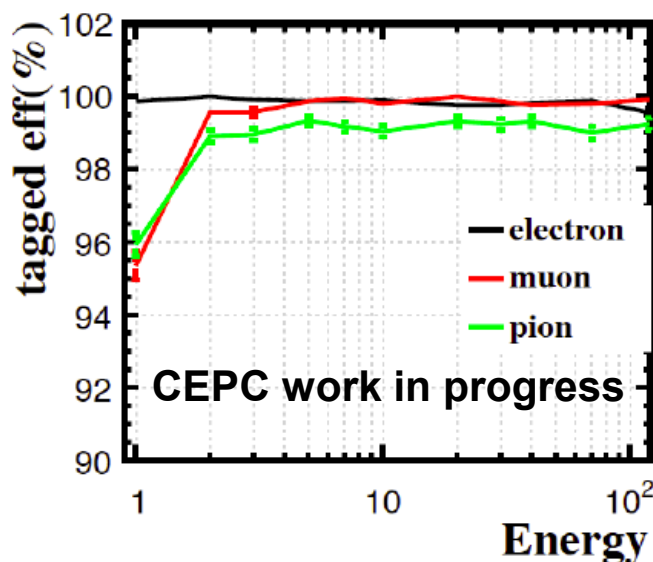

From Manqi

- PFA has done a terrific job in terms of Lepton ID
- No significant degradation for  $E > 2$  GeV charged particles

# Muon Detector as TCMT

# Muon Detector as TCMT

# Muon Detector as TCMT

## Muon system as an add-on

# Muon Detector as TCMT

## Muon system as an add-on

- **Simulation study with built-in calorimeter / TCMT geometry, also integrated with yoke and magnet system**
- **Complementary to Calorimeter**

# Muon Detector as TCMT

## Muon system as an add-on

- Simulation study with built-in calorimeter / TCMT geometry, also integrated with yoke and magnet system
  - Complementary to Calorimeter
    - Effect as a tail catcher / muon tracker (TCMT)
- JER with/wo TCMT
- Study ongoing

# Muon Detector as TCMT

## Muon system as an add-on

- Simulation study with built-in calorimeter / TCMT geometry, also integrated with yoke and magnet system
- Complementary to Calorimeter
  - Effect as a tail catcher / muon tracker (TCMT)

### JER with/wo TCMT

- Study ongoing
- Preliminary test with fast simulation: the level of improvement depends on the energy deposited in the muon detector, ranging from 1% (energy compensation ~ 1GeV) to 8% (energy compensation ~ 10GeV or more)



# Future R&D

# Future R&D

- ✓ **Long-lived particles optimization: explore new physics scenario of long-lived particles and exotic decays. Optimize detector parameters and technologies.**

# Future R&D

- ✓ **Long-lived particles optimization: explore new physics scenario of long-lived particles and exotic decays. Optimize detector parameters and technologies.**
- ✓ **Layout and geometry optimization: detailed studies on the structure of the segments and modules. The geometry and dimensions need to be optimized together with the inner detectors, in particular the ECAL and the HCAL.**

# Future R&D

- ✓ **Long-lived particles optimization: explore new physics scenario of long-lived particles and exotic decays. Optimize detector parameters and technologies.**
- ✓ **Layout and geometry optimization: detailed studies on the structure of the segments and modules. The geometry and dimensions need to be optimized together with the inner detectors, in particular the ECAL and the HCAL.**
- ✓ **Gas detectors: Study aging effects, improve long-term reliability and stability.**

# Future R&D

- ✓ **Long-lived particles optimization: explore new physics scenario of long-lived particles and exotic decays. Optimize detector parameters and technologies.**
  - ✓ **Layout and geometry optimization: detailed studies on the structure of the segments and modules. The geometry and dimensions need to be optimized together with the inner detectors, in particular the ECAL and the HCAL.**
  - ✓ **Gas detectors: Study aging effects, improve long-term reliability and stability.**
- All detectors: Improve massive and large area production procedures and readout technologies.**

# Summary

# Summary

- ✓ **Muon detector baseline design with RPC.**

# Summary

- ✓ **Muon detector baseline design with RPC.**
- ✓ **Survey of various detector options.**



# Summary

- ✓ **Muon detector baseline design with RPC.**
- ✓ **Survey of various detector options.**
- ✓ **Lots of R&D to be done.**

# Summary

- ✓ Muon detector baseline design with RPC.
- ✓ Survey of various detector options.
- ✓ Lots of R&D to be done.
- ✓ International/domestic collaboration welcome.